


37° - FLARED TUBE CONNECTORS

407002

90° (ADJ) male JIC - SAE 3000 PSI flange

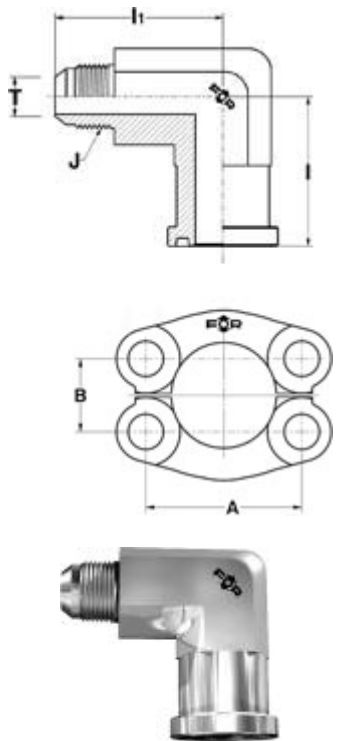

DN			T	RIFERIMENTO REFERENCE	J	I	I ₁	A	B
IN.	MM.	IN.							
1/2	12	1/2		A407002-1212	3/4-16 UNF-2A	42	48	38,10	17,48
1/2	14÷16	5/8		A407002-1216	7/8-14 UNF-2A	42	50	38,10	17,48
3/4	14÷16	5/8		A407002-1916	7/8-14 UNF-2A	52	58	48	22,23
3/4	18-20	3/4		A407002-1920	1"1/16-12 UN-2A	52	60	48	22,23
3/4	25	1"		A407002-1925	1"5/16-12 UN-2A	52	61	48	22,23
1"	18-20	3/4		A407002-2520	1"1/16-12 UN-2A	54	61	52	26,19
1"	25	1"		A407002-2525	1"5/16-12 UN-2A	54	62	52	26,19
1"	30-32	1"1/4		A407002-2532	1"5/8-12 UN-2A	56	66	52	26,19
1"1/4	25	1"		A407002-3225	1"5/16-12 UN-2A	54	66	59	30,18
1"1/4	30-32	1"1/4		A407002-3232	1"5/8-12 UN-2A	54	68	59	30,18
1"1/2	30-32	1"1/4		A407002-3832	1"5/8-12 UN-2A	61	75	70	35,71
1"1/2	38	1"1/2		A407002-3838	1"7/8-12 UN-2A	61	78	70	35,71
3/4	10	3/8		SA407002-1910	9/16-18 UNF-2A	52	53	48	22,23
1"	38	1"1/2		SA407002-2538	1"7/8-12 UN-2A	76	78	52	26,19
1"1/4	18-20	3/4		SA407002-3220	1"1/16-12 UN-2A	59	63,5	59	30,18

FOR S.P.A. - NORME E DIMENSIONI SOGGETTE A MODIFICHE SENZA PREAVVISO.
FOR S.P.A. - DESIGN DETAILS AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.