

MANUAL

The Series 540 manual hose reel is an efficient and simple solution to the handling of flexible hoses even up to 1".

PAINTED
STEEL

AISI 304 - 316
STAINLESS
STEEL

Endurance and capacity with hoses up to 1"



Note: All the hose reels in the table are without hose

Fluid - Pressure	PAINTED STEEL	AISI 304 S. STEEL	AISI 316 S. STEEL	Connection	
	P/N	P/N	P/N	inlet	outlet
Air - Water 20 bar - brass swivel joint - Viton® seals	75400/10	75420/10	-	F 1" G	F 1" G
	75400/15	75420/15	-	F 1/2" G	F 1/2" G
Water max 130° C 100 bar - AISI 304 stainless steel swivel joint - Viton® seals	75400/20	75440/20 *	75450/20 **	F 1" G	F 1" G
	75400/25	75440/25 *	-	F 1/2" G	F 1/2" G
Water max 130° C 200 bar - AISI 304 stainless steel swivel joint - Viton® seals	75400/30	75440/30	-	F 3/8" G	F 1/2" G
	75400/35	75440/35	-	F 3/8" G	F 1/2" G
Oil and similar 150 bar - galvanized steel swivel joint - "polyurethane" seals	75400/40	-	-	F 1" G	F 1" G
	75400/45	-	-	F 1/2" G	F 1/2" G
Grease 600 bar - galvanized steel swivel joint - "polyurethane" seals	75400/50	75420/50	-	F 3/8" G	F 1/2" G
	75400/10	75420/10	-	F 1" G	F 1" G

Note: for special fluids see the compatibility table at page 26


* suitable also for oil

** AISI 316 stainless steel swivel joint

Hose reel capacity

ø hose external		Series 540
1/4"	14 mm	Length max 110 m
3/8"	17 mm	Length max 60 m
1/2"	20 mm	Length max 45 m
5/8"	21 mm	Length max 25 m
3/4"	27 mm	Length max 20 m
1"	34 mm	Length max 15 m

Overall dimensions (mm)

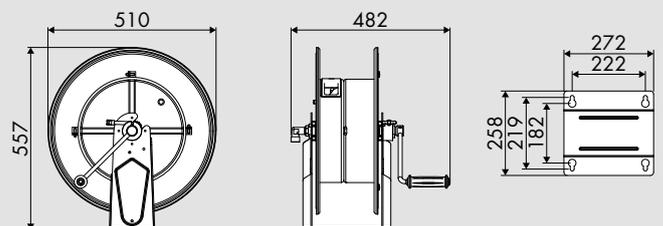

No.1 packing m³ 0,214 kg 21