


SINGLE PARTS PLUG

THE WORLD OF TUBE FITTINGS

VSCH BLANKING PLUG

With internal hexagon and captive seal NBR (e.g. Perbunan).

Thread: BSP parallel, metric parallel.

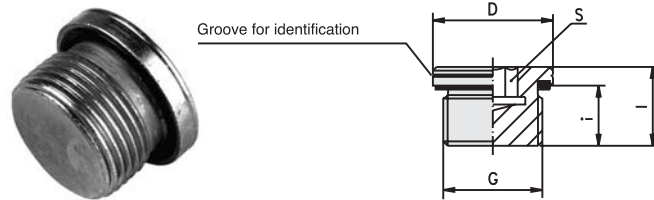

description	PN	G	D	I	i	S	MA*/NM
VSCH-M10x1/WD	400	M 10x1	14	12.0	8	5	10
VSCH-M 12x1.5/WD	400	M 12x1.5	17	17.0	12	6	20
VSCH-M 14x1.5/WD	400	M 14x1.5	19	17.0	12	6	30
VSCH-M 16x1.5/WD	400	M 16x1.5	22	17.0	12	8	40
VSCH-M 18x1.5/WD	400	M 18x1.5	24	17.0	12	8	50
VSCH-M 20x1.5/WD	400	M 20x1.5	26	19.0	14	10	60
VSCH-M 22x1.5/WD	400	M 22x1.5	27	19.0	14	10	80
VSCH-M 26x1.5/WD	400	M 26x1.5	32	21.0	16	12	100
VSCH-M 27x2/WD	400	M 27x2	32	21.0	16	12	120
VSCH-M 33x2/WD	400	M 33x2	40	22.5	16	17	200
VSCH-M 42x2/WD	315	M 42x2	50	22.5	16	22	350
VSCH-M 48x2/WD	315	M 48x2	55	22.5	16	24	400
VSCH-R 1/8"/WD	400	G 1/8" A	14	12.0	8	5	10
VSCH-R 1/4"/WD	400	G 1/4" A	19	17.0	12	6	30
VSCH-R 3/8"/WD	400	G 3/8" A	22	17.0	12	8	40
VSCH-R 1/2"/WD	400	G 1/2" A	27	19.0	14	10	80
VSCH-R 3/4"/WD	400	G 3/4" A	32	21.0	16	12	120
VSCH-R 1"/WD	400	G 1" A	40	22.5	16	17	200
VSCH-R 1 1/4"/WD	315	G 1 1/4" A	50	22.5	16	22	350
VSCH-R 1 1/2"/WD	315	G 1 1/2" A	55	22.5	16	24	400

*MA = tightening torques relate to steel counterparts. Contact us for use with other materials.

Please see "Engineering and technical data - Selecting the correct tube fitting" for more information on
- internal screw threads.
- pressure.