


ORFS FFORX-MBA90


SAE flat face O-Ring female swivel / male SAE 'O' Ring boss 90° elbow

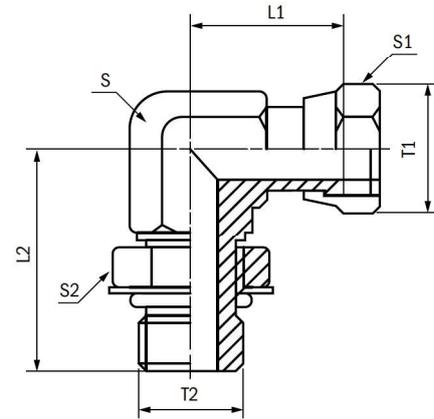

THREAD		LENGTH		HEX/FLATS			WORKING PRESSURE	ADAPTOR
T1	T2	L1	L2	S	S1	S2	WP	REF.
ORFS F	SAE O	mm	mm	mm	mm	mm	bar	ORFS
3/16"-18	7/16"-20 UNF	26.4	32.8	14.0	17.0	17.0	315	4FFORX-4MBA90
1 1/16"-16	9/16"-18 UNF	31.0	36.8	19.0	22.0	19.0	315	6FFORX-6MBA90
1 3/16"-16	3/4"-16 UNF	38.0	40.5	19.0	24.0	24.0	315	8FFORX-8MBA90
1"-14	7/8"-14 UNF	41.2	50.0	27.0	30.0	27.0	250	10FFORX-10MBA90
1 3/16"-12	1 1/16"-12 UN	46.5	55.0	30.0	36.0	36.0	250	12FFORX-12MBA90
1 7/16"-12	1 5/16"-12 UN	53.5	59.5	36.0	41.0	41.0	200	16FFORX-16MBA90
1 11/16"-12	1 5/8"-12 UN	58.2	62.2	41.0	50.0	50.0	160	20FFORX-20MBA90
2"-12	1 7/8"-12 UN	58.8	66.0	48.0	60.0	55.0	160	24FFORX-24MBA90

ORFS FFORX-FFORX

SAE flat face O-Ring female swivel / female swivel



THREAD		LENGTH	HEX/FLATS		WORKING PRESSURE	ADAPTOR
T1	T2	L	S	S1 & S2	WP	REF.
ORFS F	ORFS F	mm	mm	mm	bar	ORFS
3/16"-18	3/16"-18	40.0	17.0	17.0	630	4FFORX-4FFORX
1 1/16"-16	1 1/16"-16	46.0	19.0	22.0	630	6FFORX-6FFORX
1 3/16"-16	1 3/16"-16	53.8	22.0	24.0	630	8FFORX-8FFORX
1"-14	1"-14	61.0	27.0	30.0	400	10FFORX-10FFORX
1 3/16"-12	1 3/16"-12	68.0	32.0	36.0	400	12FFORX-12FFORX
1 7/16"-12	1 7/16"-12	70.0	36.0	41.0	400	16FFORX-16FFORX
1 11/16"-12	1 11/16"-12	76.0	46.0	50.0	250	20FFORX-20FFORX
2"-12	2"-12	80.0	55.0	60.0	250	24FFORX-24FFORX