




Pipe / Tube Bushing ■ Type SRF

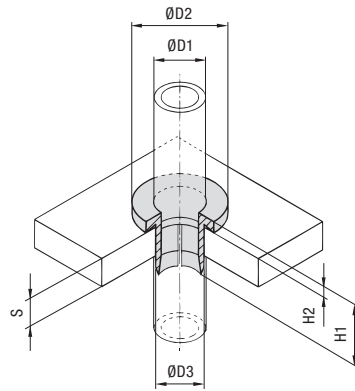

Outside Diameter ØD1		Nominal Bore	Dimensions			Wall Thickness	Mounting Bore
(mm)	(in)		(mm/in)	H1	H2	(mm/in)	(mm/in)
ØD2		(in)	ØD2	H1	H2	S	ØD3
6	1/4		18	22	4	4 ... 12	10
			.71	.87	.16	.1647	.39
8	5/16		20	22	4	4 ... 12	12
			.79	.87	.16	.1647	.47
10	3/8	1/8 Pipe 1/4 Copper Tube (ASTM B88)	22	22	4	4 ... 12	14
			.87	.87	.16	.1647	.55
12	1/2	3/8 Copper Tube (ASTM B88)	24	22	4	4 ... 12	16
			.94	.87	.16	.1647	.63
14		1/4 Pipe	26	22	4	4 ... 12	18
			1.02	.87	.16	.1647	.71
15			28	22	4	4 ... 12	20
			1.10	.87	.16	.1647	.79
16	5/8	1/2 Copper Tube (ASTM B88)	28	22	4	4 ... 12	20
			1.10	.87	.16	.1647	.79
18			30	22	4	4 ... 12	22
			1.18	.87	.16	.1647	.87
20	3/4		32	22	4	4 ... 12	24
			1.26	.87	.16	.1647	.94
22	7/8	3/4 Copper Tube (ASTM B88)	34	22	4	4 ... 12	26
			1.34	.87	.16	.1647	1.02
25	1		38	22	4	4 ... 12	30
			1.50	.87	.16	.1647	1.18
28		1 Copper Tube (ASTM B88)	41	22	4	4 ... 12	33
			1.61	.87	.16	.1647	1.30
30			43	22	4	4 ... 12	34
			1.69	.87	.16	.1647	1.39
35		1-1/4 Copper Tube (ASTM B88)	48	22	4	4 ... 12	40
			1.89	.87	.16	.1647	1.57
38	1-1/2		51	22	4	4 ... 12	43
			2.01	.87	.16	.1647	1.70
42		1-1/4 Pipe 1-1/2 Copper Tube (ASTM B88)	55	22	4	4 ... 12	47
			2.17	.87	.16	.1647	1.85

Ordering Codes

Pipe / Tube Bushing

***SRF-*20-*PP**

* Pipe / Tube Bushing	SRF
* Exact outside diameter Ø D1 (mm)	20
* Material code (see below)	PP

Standard Materials



Polypropylene
Colour: Natural colour
Material code: **PP**



Thermoplastic Elastomer (87 Shore-A)
Colour: Black
Material code: **SA87**

See pages 178 / 179 for material properties and technical information.

Product Features

- Designed to centre the pipe or tube in a through-hole (e.g. for return lines entering the hydraulic reservoir)
- Vibration and noise absorbing element
- Available for all commonly used Metric and imperial pipe and tube diameters from 6 ... 42 mm and 1/4 ... 1-1/2 in
- Easy plug-in installation