



In accordance with ATEX directive II 3 GD c TX


Ratio 5:1
Flow rate 45 l/min



P/N OE90C/51


INDUSTRIAL AIR-OPERATED PUMPS S. 900

P/N	OE90C/51	
Seals	Polyurethane	
Compatible fluids	Oil, lubricants and similar	
Suction tube upper body	Aluminum	
Suction tube	Carbon steel	
Air inlet connection	F1/2"G	
Fluid outlet connection	F3/4"G	
Air max pressure	bar	8
Max air consumption 8 bar	m ³ /min	1,6
Noise level	dB	80
Suitable for drums or tank	modular	
Packing	No.- m ³	1 - 0,040
Weight	Kg	12
Dimensions (A x B x C)	mm	430 - 230 - 62

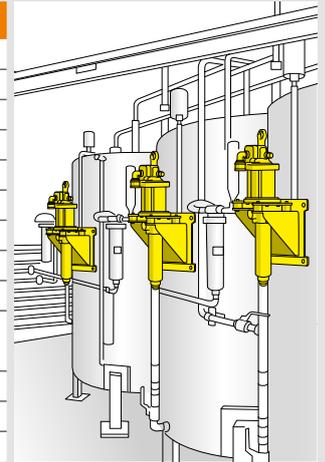


PUMP AIR FEEDING PRESSURE

- A** 8 bar (116 psi)
- B** 6 bar (87 psi)
- C** 4 bar (58 psi)

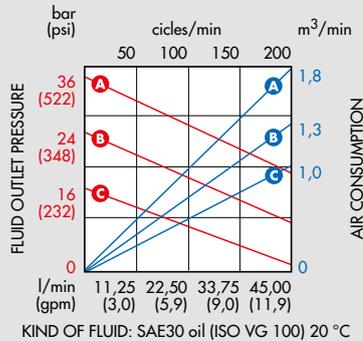

OVERALL DIMENSIONS



In accordance with ATEX directive II 3 GD c TX

Ratio 7:1
Flow rate 30 l/min



P/N OE92C/71




P/N OE90C/71

INDUSTRIAL AIR-OPERATED PUMPS S. 900


P/N	OE90C/71	OE91C/71
Seals	Polyurethane	
Compatible fluids	Oil, lubricants and similar	
Suction tube upper body	Aluminum	
Suction tube	Carbon steel	
Air inlet connection	F1/2"G	F1/2"G
Fluid outlet connection	F3/4"G	F3/4"G
Air max pressure	bar	8
Max air consumption 8 bar	m ³ /min	1,6
Noise level	dB	80
Suitable for drums or tank	modular	for drums 180 - 220 Kg
Packing	No.- m ³	1 - 0,040
Weight	Kg	11
Dimensions (A x B x C)	mm	430 - 270 - 53

PUMP AIR FEEDING PRESSURE

- A** 8 bar (116 psi)
- B** 6 bar (87 psi)
- C** 4 bar (58 psi)

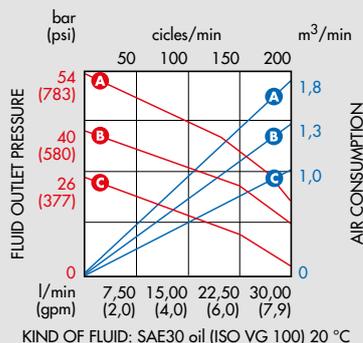

OVERALL DIMENSIONS



Ex In accordance with ATEX directive II 3 GD c TX


Ratio 11:1
Flow rate 30 l/min




P/N OE90C/111 P/N OE91C/111

INDUSTRIAL AIR-OPERATED PUMPS S. 900

P/N	OE90C/111	OE91C/111
Seals	Polyurethane	
Compatible fluids	Oil, lubricants and similar	
Suction tube upper body	Aluminum	
Suction tube	Carbon steel	
Air inlet connection	F1/2"G	F1/2"G
Fluid outlet connection	F3/4"G	F3/4"G
Air max pressure	8 bar	8
Max air consumption 8 bar	1,7 m ³ /min	1,7
Noise level	80 dB	80
Suitable for drums or tank	modular	for drums 180 - 220 Kg
Packing	No. - m ³ 1 - 0,040	1 - 0,070
Weight	Kg 11	16
Dimensions (A x B x C)	mm 430 - 270 - 45	430 - 940 - 45

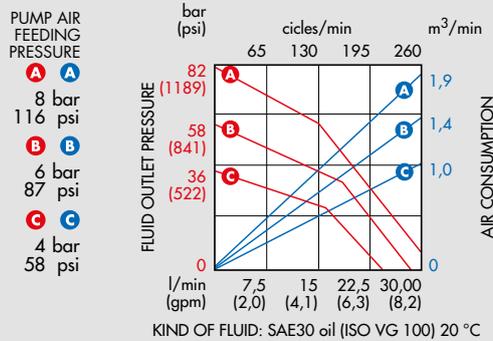

OVERALL DIMENSIONS



Ex In accordance with ATEX directive II 3 GD c TX



Ratio 9:1
Flow rate 45 l/min



P/N OE115F/91

INDUSTRIAL AIR-OPERATED PUMPS S. 1200

P/N	OE115F/91
Seals	Polyurethane
Compatible fluids	Oil, lubricants and similar
Suction tube upper body	Carbon steel
Suction tube	Carbon steel
Air inlet connection	F1/2"G
Fluid outlet connection	F3/4"G
Air max pressure	8 bar
Max air consumption 8 bar	2,8 m ³ /min
Noise level	80 dB
Suitable for drums or tank	modular
Packing	No. - m ³ 1 - 0,040
Weight	Kg 14
Dimensions (A x B x C)	mm 445 - 230 - 62

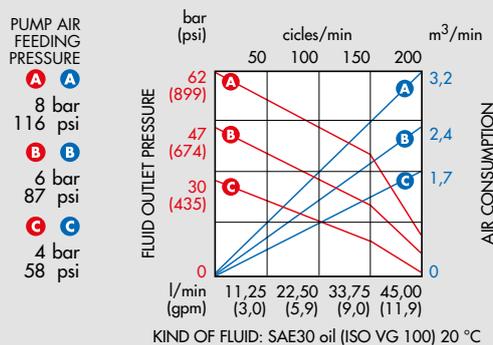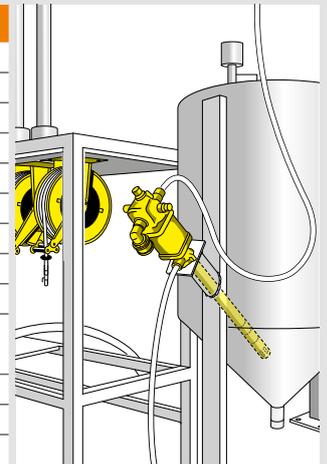

OVERALL DIMENSIONS

