


SU/2-D

12020004

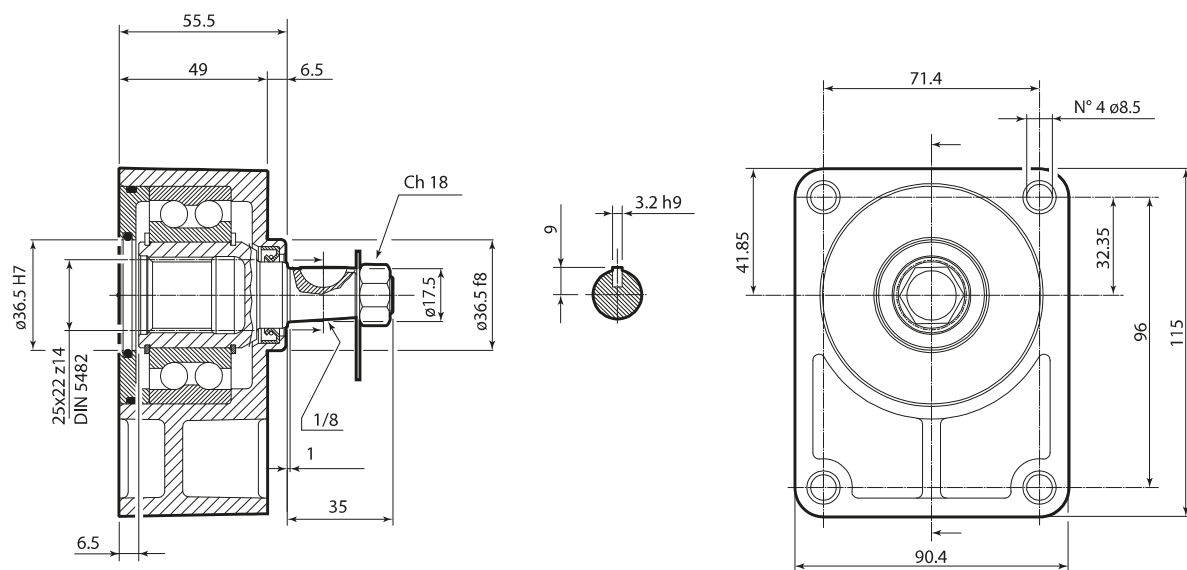

The SU/2-D (tapered shaft), is suitable for driving Gr. 2 hydraulic pumps and motors, with belts, chain or other transmission, in which heavy combined loads take place (axial and radial).

The pump/motor Gr. 2, is directly flanged and connected by splined coupling (coupling to be ordered separately).

SU/2-D

FEATURES



Max. revolutions per minute	4000 rpm
Max. working temperature	70 °C
Grease quantity	16.5 ÷ 20.5 g
Type of grease	DIN 51818 NLGI class 2

Minimum radial load * (F_r)	155 N
Radial load *	See graphic
Axial load * (F_a)	$\leq 80\% F_r$
Life *	3500 h

* Nominal values calculated according to ISO 281. For more information, contact our technical department.


SU/2-D

MAXIMUM LOAD ON THE SHAFT

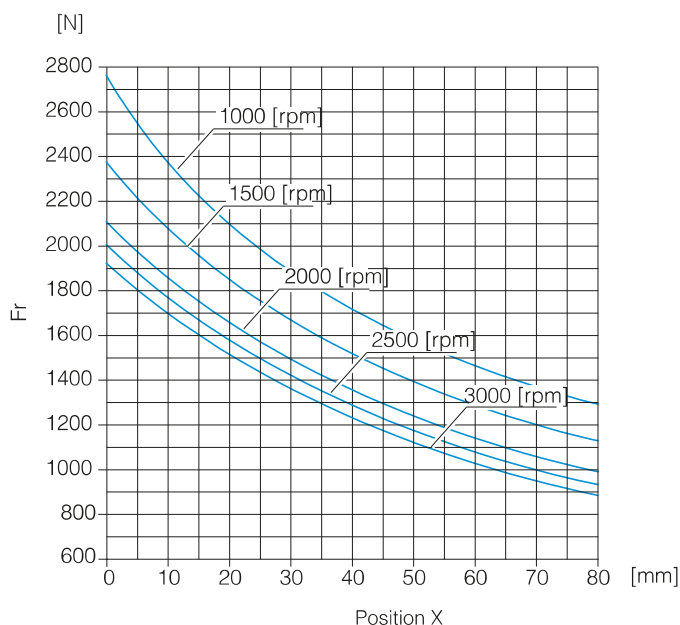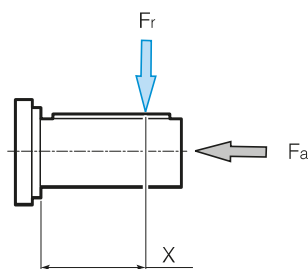


Click **DANA** button to return to main index

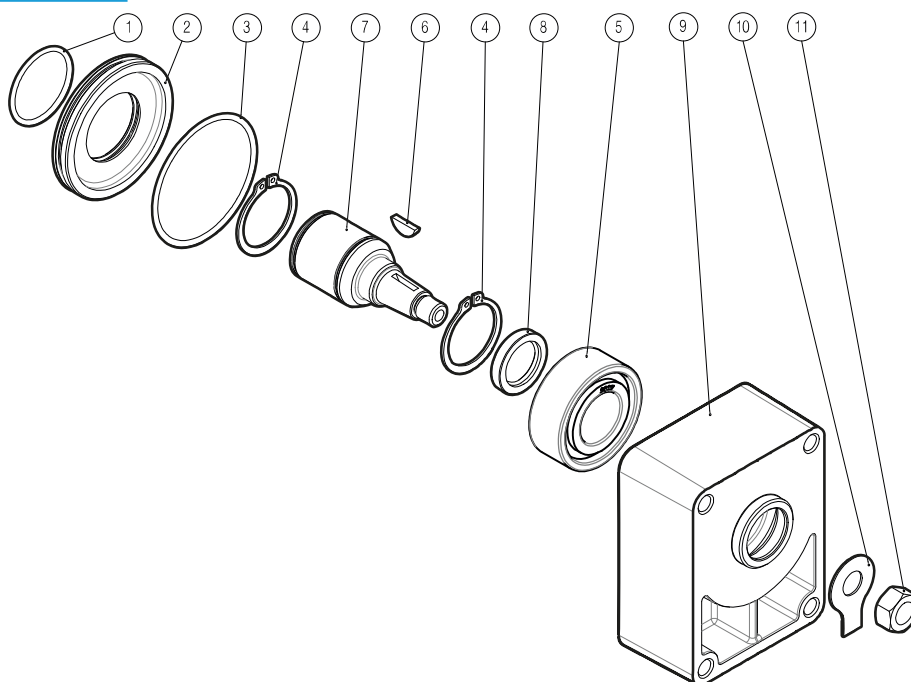

SU/2-D SPARE PARTS

Ref.	Code	Description	Q.ty
1	41214200000	O-RING 36.17x2.62 NBR 70Sh	1
2	39003700	COVER x SU/2	1
3	41216900000	O-RING 64,77X2,62 NBR 70Sh	1
4	43103900000	SEEGER CIRCLIP DIN 471-A 35	2
5	44005300	BEARING 3207 (35x72x27)	1
6	43203200	KEY 3,2x6,5	1
7	34221800	TAPERED SHAFT FOR SUPPORT Gr.2 - SU/2	1
8	44101900	SHAFT SEAL 22x32x6	1
9	39003500	HOUSING FOR SU/2	1
10	42101400	WASHER 13 R40P UNI 6600 WITH KEY	1
11	Q26514150	NUT M12x1.5 10 ZN UNI 5588	1

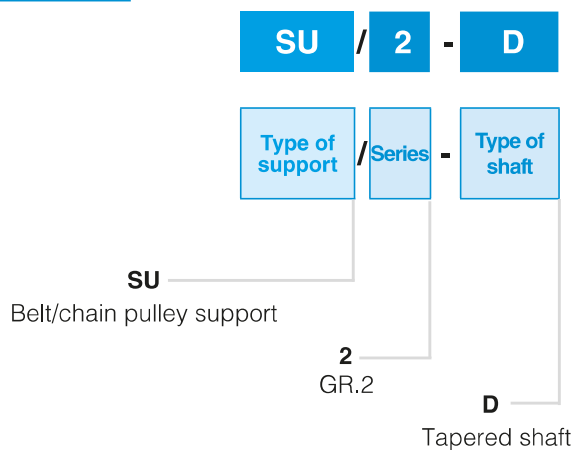SU/2-D ORDERING CODEClick **DANA** button to return to main index