
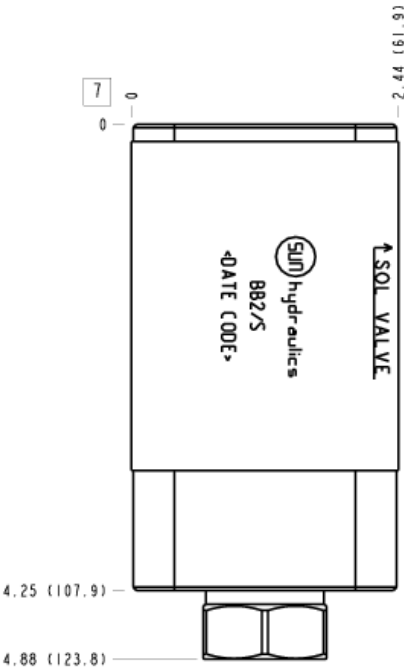


Reducing/Relieving, On A Tank to T, Drained to T,
Reverse Free Flow Check



CONFIGURATION

/S Modifier 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 05
Body Features	Reducer on A with reverse flow check
Stack Height	2.49 in.
Seal Plate Included (see notes)	Yes

NOTES *Important:* Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-014	O-Ring	5
700-001	Seal Plate	1
CXFAXCN	Cartridge	1

CONFIGURATION OPTIONS
Model Code Example: BB2/S

MODIFIER	(/S)
/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil	
6061-T651 Aluminum, Buna-N	
/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I	
/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II	
/N 6061-T651 Aluminum, Viton	
/16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I	
/15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II	
/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black	
/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer	
/Y 65-45-12 Ductile Iron, Viton, Dewatering Oil	
/Y4 65-45-12 Ductile Iron, Viton, Chem. Black	
/Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer	

