




Motor Mount HIC Technical Information

MM-OMP/OMR-LS-DVME06

OPERATION


This is a dual cross-port relief HIC with shuttle that mounts to OMPX/OMRX motors with BSP porting (SO-A3). The OMPX and OMRX replace the legacy OMP and OMR motors.

Schematic



SPECIFICATIONS

Theoretical performance

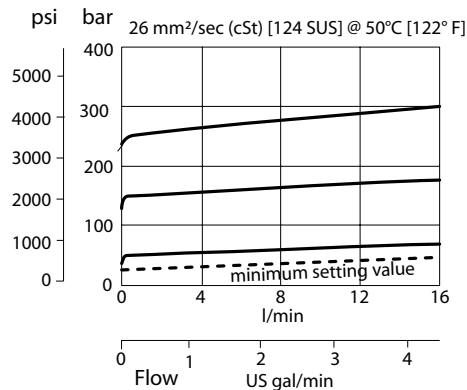


Specifications

Rated pressure	210 bar [3045 psi]
Rated flow at 7 bar [102 psi]	40 l/min [11 US gal/min]
Weight	1.13 kg [2.49 lb]
Cartridge	VME 06
Shuttle	CP124-1
Shuttle/drain port	#4 SAE (1/8 BSP)
Service mount kit	11023868
Motor	OMPX/OMRX


DIMENSIONS

Cross-sectional view

mm [in]

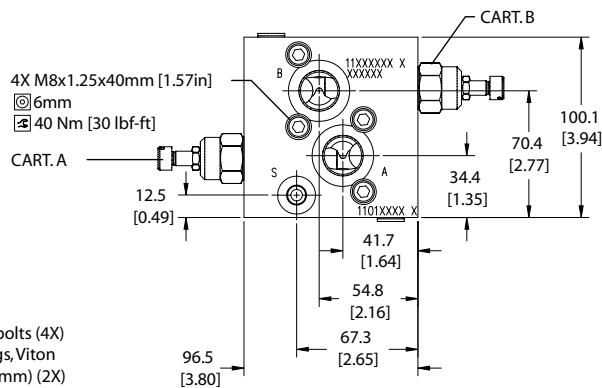

HIC Includes:
- M8x40mm bolts (4X)
- (-119) O-rings, Viton (23.47x2.62 mm) (2X)

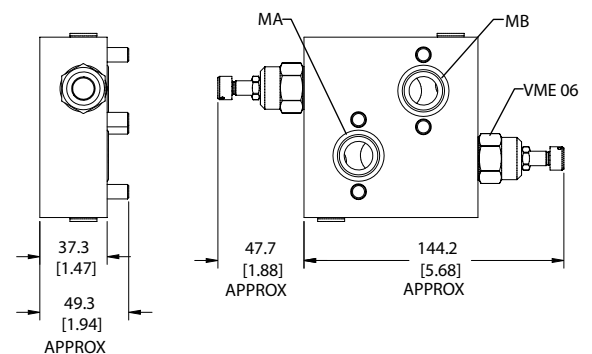

ORDERING INFORMATION

MM-OMP/OMR-LS-DVME06-EN-2-10S-B-100

