


SM – OIL LEVEL INDICATORS – ALUMINUM – Crystal-clear plastic

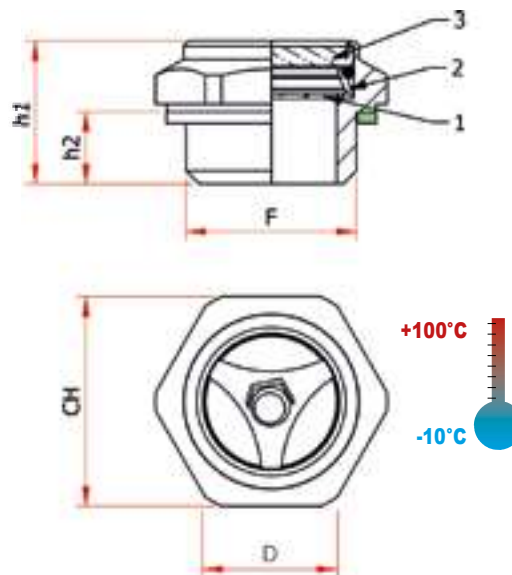

- 1 - Contrast screen
- 2 - Spacer
- 3 - Plastic viewer

-Threaded hex-head level indicator manufactured from Aluminum alloy.

-Plastic lens made from transparent PA Polyamide, compatible with mineral and synthetics oils, diesel, brake fluid and some unleaded fuel; avoid contact with alcohol based solutions and antifreeze liquids, especially at high temperatures.

-Max operating pressure suggested **5 bar/14,5 PSI**.

-Internal contrast screen in aluminum white painted with company logo (or dot) in red color.

-Fiber gasket (available on request aluminum washer).

-Maximum tightening torque suggested for installation is indicated in the table (Nm).

Code	F	CH	D	h1	h2	Nm	Weight gr	Pack min.
SM/14	G.1/4"	17	19	18.8	8	4	5	100
SM/38	G.3/8"	22	24	18	9	10	9	100
SM/12	G.1/2"	27	29.5	20	9	15	15	100
SM/34	G.3/4"	32	35.5	22	11	22	22.5	50
SM/1	G.1"	40	44	22	10	25	35	50
SM/114	G. 1 1/4"	50	55	27	12	n.d.	60	5
SM/112	G. 1 1/2"	55	62	26	13	n.d.	80	1
SM/14.15	M14x1,5	17	18.5	17	8	4	5	100
SM/16.15	M16x1,5	22	24	18	9	10	8,5	100
SM/18.15	M18x1,5	22	24	18	9	12	14	100
SM/20.15	M20x1,5	24	26.5	21	10	15	12	100
SM/22.15	M22x1,5	27	29.5	20	9	15	15	100
SM/24.15	M24x1,5	30	33.5	24	11	18	22.5	100