



-20°C ÷ +100°C



Working pressure:
From 0 to 12 Bar



7,4 mm



Compressed air



- Taper gas BSPT ISO 7
from R1/8" to R1/2"
- Parallel gas BSPP ISO 228
from G1/8" to G1/2"



Body: Nickel-plated brass


Button: Zinc-plated steel

Connection: Aluminium

Seal: NBR

Plug connection: Zinc-plated steel

CONFIGURATIONS



SO
Single
Shutter

PROFILE

EUROSTANDARD
GERMANY PROFILE



Products in compliance with
EC Regulation 1907/2006




Products in compliance with
the directive EU 2015/863

FEATURES

- FPGS series are only to be used with FPIN series.
- **Safety** 2-stage quick couplings.

AIR FLOW RATE


BUTTON QUICK COUPLINGS

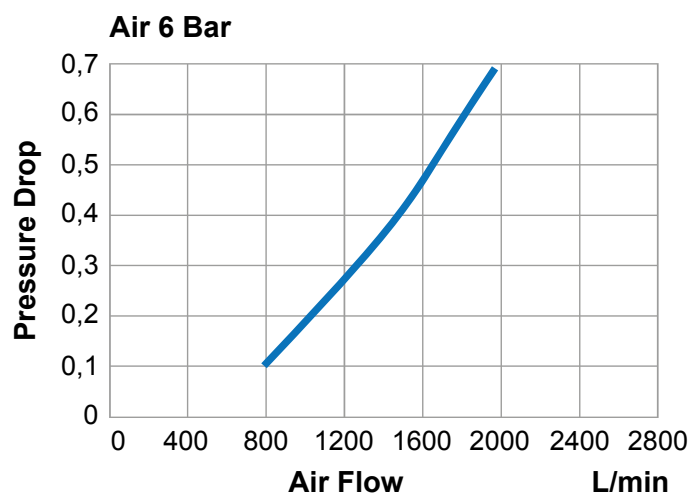

FPGSM

Safety male button quick coupling BSPT thread

SAFETY




CODE	T	ØP	L	CH	WEIGHT (g)
FPGSM25R02	R 1/4"	26	69	20	110
FPGSM25R03	R 3/8"	26	68	20	128
FPGSM25R04	R 1/2"	26	70	25	142

FPGSF

Safety female button quick coupling BSPP thread

SAFETY




CODE	T	ØP	L	CH	WEIGHT (g)
FPGSF25G02	G 1/4"	26	68	20	136
FPGSF25G03	G 3/8"	26	72	20	133
FPGSF25G04	G 1/2"	26	74	25	168

FPGSB

Safety button quick coupling with barb connector

SAFETY

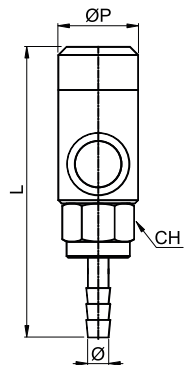


CODE	INT. TUBE Ø	ØP	BARB	L	CH	WEIGHT (g)
FPGSB25D06	6	26	7,3	83,5	20	138,5
FPGSB25D08	8	26	9,4	83,5	20	126
FPGSB25D10	10	26	11,3	83,5	20	115,5



FPINM


Male connection BSPT thread



CODE	T	L	CH	WEIGHT (g)
FPINM25R01	R 1/8"	33	16	19
FPINM25R02	R 1/4"	37	14	22
FPINM25R03	R 3/8"	37	17	25
FPINM25R04	R 1/2"	43	22	48

FPINF


Female connection BSPP thread



CODE	T	L	CH	WEIGHT (g)
FPINF25G01	G 1/8"	32	14	20
FPINF25G02	G 1/4"	33	17	25
FPINF25G03	G 3/8"	33	19	26
FPINF25G04	G 1/2"	36	24	41

FPINB

Connection with barb connector



CODE	Ø ID TUBE	BARB	L	WEIGHT (g)
FPINB25D06	6	7,3	46	15
FPINB25D08	8	9,3	46	16
FPINB25D10	10	11,3	48	18,5

