


INTERPUMP PILOT PLUS 150

APPLICATIONS :



TFE0P15

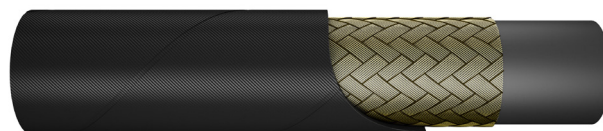

APPLICABLE SPECS. :

IMM SPECIFICATION

Lightweight. Compact design. High flexibility. Tested up 1.000.000 impulse cycles at rated working pressure.

Internal hose: Synthetic rubber, extruded whole without joints, of uniform thickness.

Reinforcement: 1 high tensile steel wire braid.

Covering: Anti-abrasive synthetic rubber, resistant to oils, fuels and atmospheric conditions.

Recommended fluid: Mineral and biological oils, glycol-water based, water, lubricants.

Operating temperature: from -40 to +120°C (intermittent 135°C), from -40 to +70°C for water based fluids, from 0 to +70°C water.

													
Part number	ID		Size	OD	Max WP		Min BP		Min BR		Weight		Ferrule
	in	mm		mm	bar	psi	bar	psi	mm	inch	kg/m	lb/ft	
TFE0P15-03	3/16"	4.8	3	10.5	150	2175	600	8700	20	0.787	0.15	0.101	001C-03
TFE0P15-04	1/4"	6.4	4	11.5	150	2175	600	8700	25	0.984	0.163	0.109	001C-04
TFE0P15-05	5/16"	8.0	5	13.1	150	2175	600	8700	30	1.181	0.193	0.130	001C-05
TFE0P15-06	3/8"	9.5	6	14.8	150	2175	600	8700	40	1.575	0.224	0.150	001C-06
TFE0P15-08	1/2"	12.7	8	17.9	150	2175	600	8700	50	1.969	0.285	0.191	001C-08

NOTE: To order from April 2018

MARKING: Available only "mylar"

ih INTERPUMP **Pilot Plus 150** DN 5 I.D. 3/16" - W.P. 15 MPa/2175 PSI