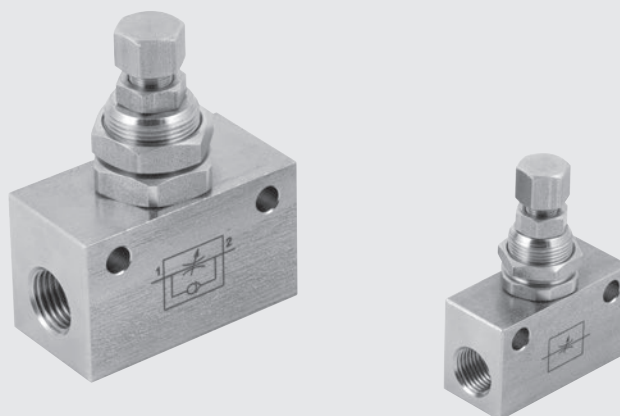



The gasket are in FKM/FPM.

- NSF/ANSI 169 standard: products in contact with food.

[illegible]

COMPONENTS


- ① BLOCK: AISI 316L stainless steel
- ② REGULATION NEEDLE: AISI 316L stainless steel
- ③ WALL LOCKING RING NUT: AISI 316L stainless steel
- ④ GASKET: FKM/FPM
- ⑤ NIPPLE: AISI 316L stainless steel

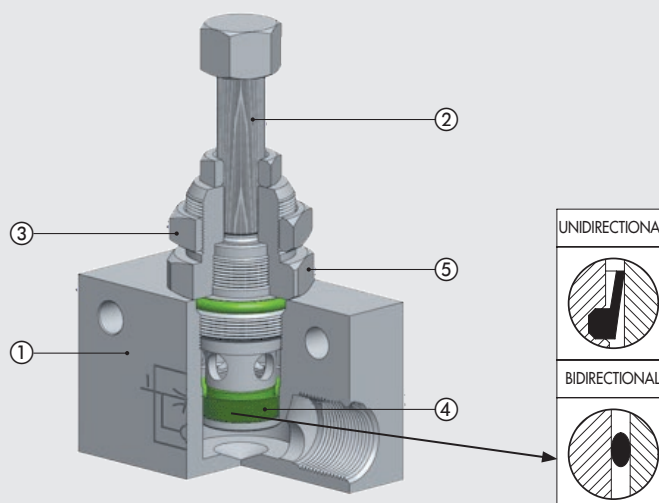

FLOW CHARTS


RFLX 1/8"

Flow rate [Nl/min]

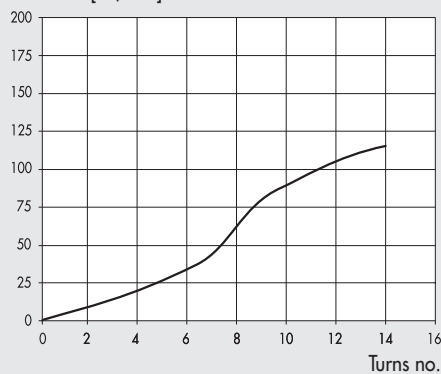

RFLX 1/4"


Flow rate [Nl/min]

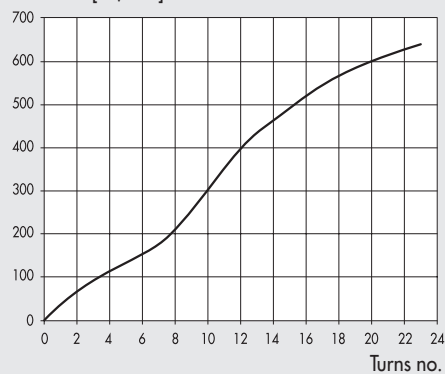

SYNOPTIC, SIZES AND VERSIONS

R F L FAMILY	X MATERIAL	U FUNCTION	1/8 Ø THREAD
In-line flow regulator	X AISI 316L stainless steel	U Unidirectional B Bidirectional	1/8 G 1/8" 1/4 G 1/4"

DIMENSIONS AND ORDERING CODES

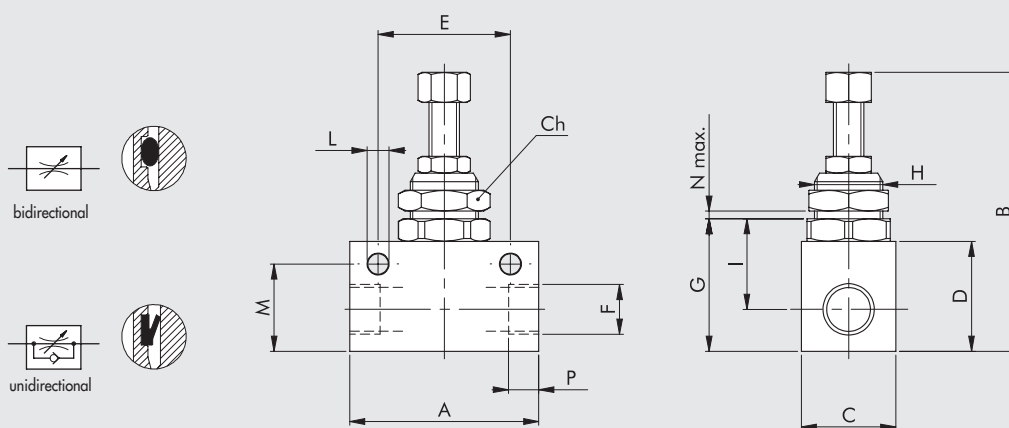

Code	Description	F	P	E	H	N max	A	B max	C	G	I	D	M	Ch	L
9041002X	RFL X U 1/8	1/8	8.5	24	M12x0.75	4.5	34	56	15	23	13	20	16	14	4.5
9041003X	RFL X U 1/4	1/4	7	35	M18x1.5	4.5	50	75	25	35	20	30	23	22	5.5
9041202X	RFL X B 1/8	1/8	8.5	24	M12x0.75	4.5	34	56	15	23	13	20	16	14	4.5
9041203X	RFL X B 1/4	1/4	7	35	M18x1.5	4.5	50	75	25	35	20	30	23	22	5.5