


Hydraulic orbital motors MRW(N)

OPTIONS

- » Model - Spool valve, roll-gerotor
- » Wheel mount
- » Motor with needle bearing (option)
- » Shafts - straight, splined and tapered
- » Metric and BSPP ports
- » Other special features



APPLICATION


- » Conveyors
- » Feeding mechanism of robots and manipulators
- » Metal working machines
- » Textile machines
- » Agricultural machines
- » Food industries
- » Grass cutting machinery etc.

PERMISSIBLE SHAFT LOADS


MRWN

The curves apply to a B10 bearing life of 2000 hours.

1. Max. radial shaft load
2. $n = 50$ RPM
3. $n = 200$ RPM
4. $n = 800$ RPM

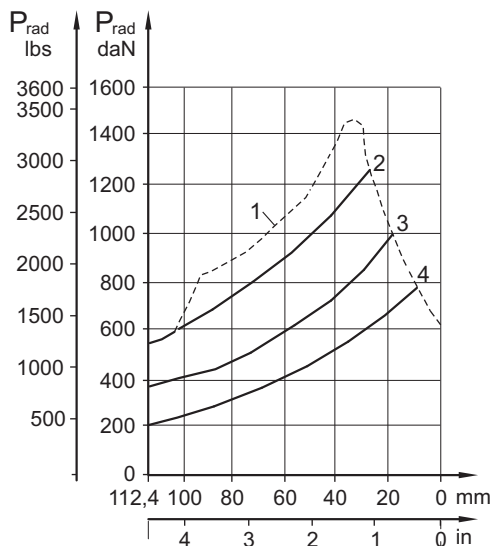


$P_{a_{max}} = 150$ daN
 $P_{a_{max}} = 200$ daN

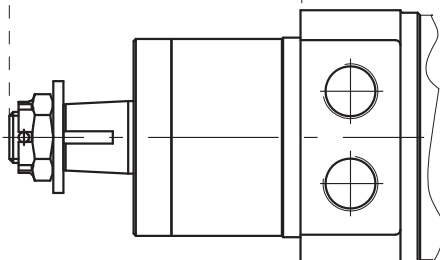


MRW

The curves apply to a B10 bearing life of 2000 hours.

1. Max. radial shaft load
2. $n = 300$ RPM
3. $n = 500$ RPM
4. $n = 800$ RPM

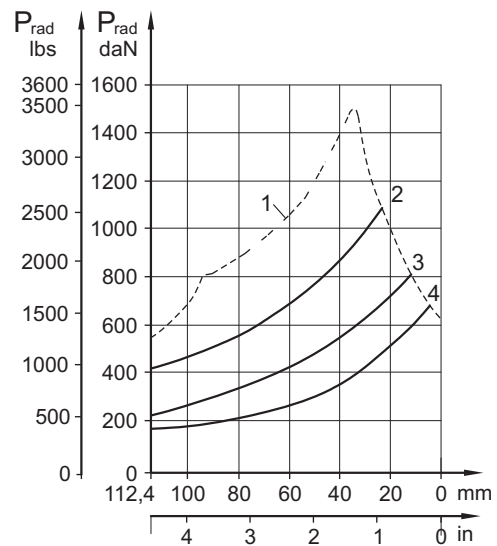

$P_{a_{max}} = 150$ daN
 $P_{a_{max}} = 200$ daN

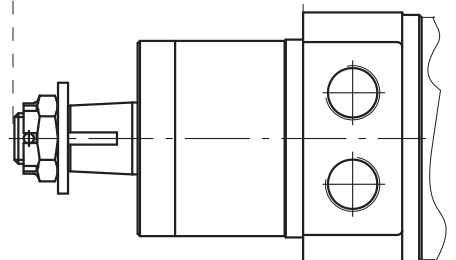

SPECIFICATION DATA

Type		MRW50	MRW80	MRW100	MRW125	MRW160	MRW200	MRW250	MRW315	MRW400
Displacement, cm ³ /rev [in ³ /rev]		51,5 [3.14]	80,3 [4.90]	99,8 [6.09]	125,7 [7.67]	159,6 [9.74]	199,8 [12.19]	250,1 [15.26]	315,7 [19.26]	397 [24.4]
Max. Speed, [RPM]	Cont.	775	750	600	475	375	300	240	190	150
	Int.*	970	940	750	600	470	375	300	240	190
Max. Torque daNm [in-lb]	Cont.	10 [900]	20 [1770]	24 [2125]	30 [2655]	39 [3450]	38,5[3410]	39 [3450]	36 [3185]	38 [3360]
	Int.*	13 [1150]	22 [1947]	28 [2480]	34 [3010]	43 [3805]	46 [4070]	47 [4160]	47 [4160]	47 [4160]
	Peak**	17 [1505]	27 [2390]	32 [2832]	37 [3275]	46 [4070]	56 [4960]	60 [5310]	61 [5400]	61 [5400]
Max. Output kW [HP]	Cont.	7 [9.5]	12,5 [17]	13 [17.4]	12,5[16.8]	11,5[15.4]	9 [12]	8 [10.7]	5 [6.7]	4,8 [6.4]
	Int.*	8,5 [11.9]	15 [20.1]	15 [20.1]	14,5[19.5]	14 [18.8]	12 [16.1]	9,5 [12.7]	8 [10.7]	6,8 [9.1]
Max. Pressure Drop bar [PSI]	Cont.	140[2030]	175[2540]	175[2540]	175[2540]	175[2540]	140[2030]	110[1600]	85 [1230]	65 [940]
	Int.*	175[2540]	200[2900]	200[2900]	200[2900]	200[2900]	175 [2540]	140[2030]	115[1670]	90 [1300]
	Peak**	225[3260]	225[3260]	225[3260]	225[3260]	225[3260]	225[3260]	200[2900]	150[2175]	115[1670]
Max. Oil Flow lpm [GPM]	Cont.	40 [10.5]	60 [15.8]	60 [15.8]	60 [15.8]	60 [15.8]	60 [15.8]	60 [15.8]	60 [15.8]	60 [15.8]
	Int.*	50 [13.2]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]
Max. Inlet Pressure bar [PSI]	Cont.	175[2540]	175[2540]	175[2540]	175[2540]	175[2540]	175[2540]	175[2540]	175[2540]	175[2540]
	Int.*	200[2900]	200[2900]	200[2900]	200[2900]	200[2900]	200[2900]	200[2900]	200[2900]	200[2900]
	Peak**	225[3260]	225[3260]	225[3260]	225[3260]	225[3260]	225[3260]	225[3260]	225[3260]	225[3260]
Max. Return Pres- sure with Drain Line bar [PSI]	Cont.	175[2540]	175[2540]	175[2540]	175[2540]	175[2540]	175[2540]	175[2540]	175[2540]	175[2540]
	Int.*	200[2900]	200[2900]	200[2900]	200[2900]	200[2900]	200[2900]	200[2900]	200[2900]	200[2900]
	Peak**	225[3260]	225[3260]	225[3260]	225[3260]	225[3260]	225[3260]	225[3260]	225[3260]	225[3260]
Max. Starting Pressure with Unloaded Shaft, bar [PSI]		10 [145]	10 [145]	10 [145]	9 [130]	7 [102]	5 [73]	4 [58]	3 [44]	3 [44]
Min. Starting Torque daNm [in-lb]	At max.press.									
	drop Cont.	8 [710]	15 [1330]	20 [1770]	25 [2215]	32 [2832]	33 [2920]	31 [2740]	31,5[2875]	31,5[2875]
	At max.press.									
		drop Int.*	10 [85]	17 [1505]	23 [2035]	28 [2480]	37 [3275]	40 [3540]	48 [4250]	58 [5220]
Min. Speed***, [RPM]		10	10	10	10	10	10	10	10	10
Weight, kg [lb]	MR(F)	6,8 [15]	6,9 [15,2]	7,2 [15.9]	7,3 [16.1]	7,5 [15.2]	8 [17.6]	8,4 [18.5]	9,1 [20]	9,8 [21.6]
	MRQ(N)	6,2 [13.7]	6,3 [13.9]	6,6 [14.6]	6,8 [15]	7,2 [14.7]	7,6 [15.4]	7,8 [17.2]	8,6 [19]	9,3 [20.5]
For rear ports: +0,650 [1.433]										

* Intermittent operation: the permissible values may occur for max. 10% of every minute.



** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds lower than given, consult factory or your regional manager.


- Intermittent speed and intermittent pressure must not occur simultaneously.
- Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
- Recommended minimum oil viscosity 13 mm²/s [70 SUS] at 50°C [122°F].
- Recommended maximum system operating temperature is 82°C [180°F].
- To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

DIMENSIONS AND MOUNTING DATA

P_(A, B) : 2xG1/2 or 2xM22x1,5 - 15 mm [.59 in] depth
T : G1/4 or M14x1,5 - 12 mm [.47 in] depth (plugged)

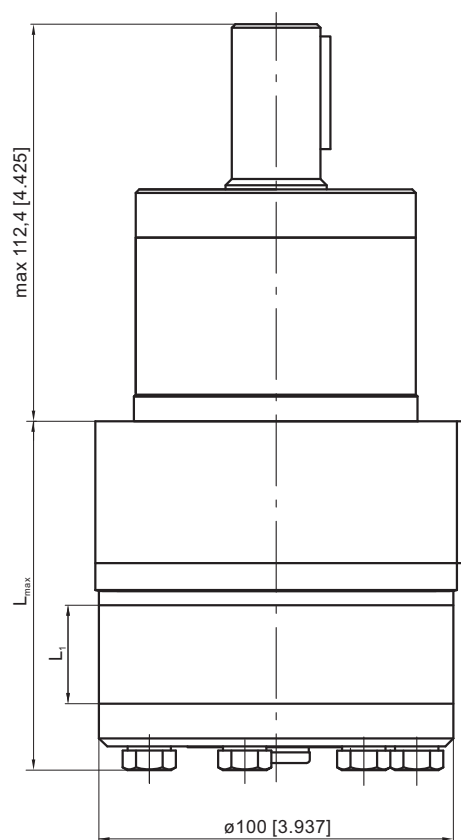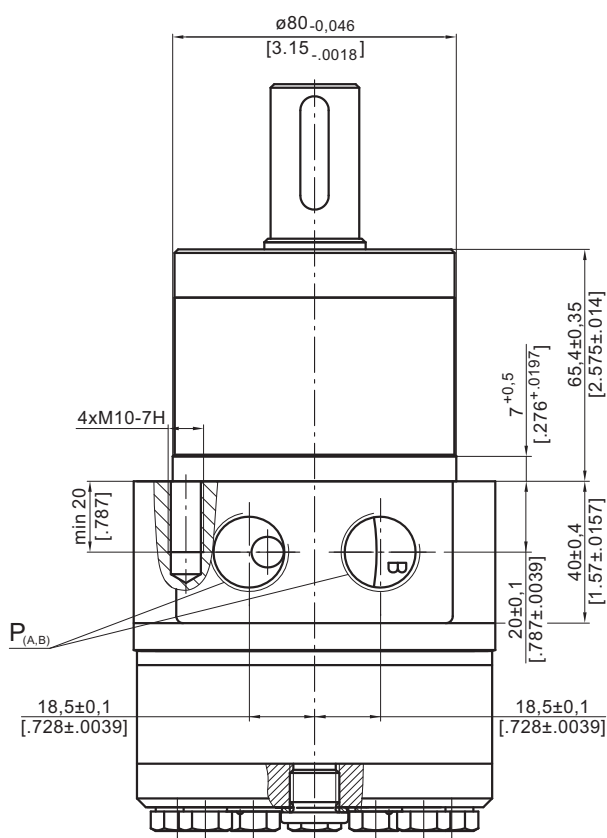

Type	L, mm [in]	L _i , mm [in]
MRW 50	81,0 [3.19]	9,0 [.35]
MRW 80	86,0 [3.39]	14,0 [.55]
MRW 100	89,5 [3.52]	17,4 [.69]
MRW 125	93,8 [3.69]	21,8 [.86]
MRW 160	99,8 [3.93]	27,8 [1.09]
MRW 200	106,8 [4.20]	34,8 [1.37]
MRW 250	115,5 [4.55]	43,5 [1.71]
MRW 315	126,8 [4.99]	54,8 [2.16]
MRW 400	141,5 [5.57]	69,4 [2.73]

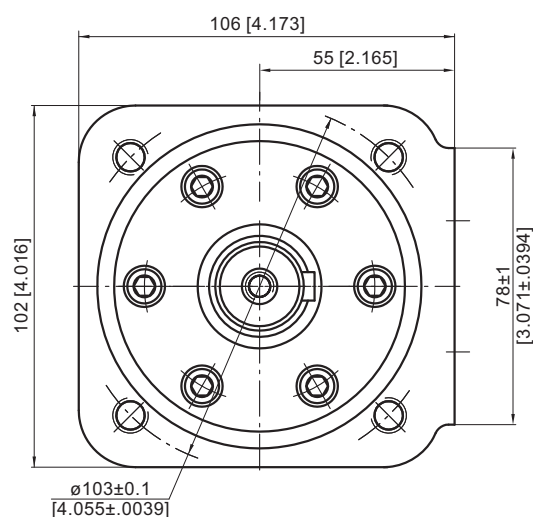


Standard Rotation
 Viewed from Shaft End
 Port A Pressurized - CW
 Port B Pressurized - CCW


Reverse Rotation
 Viewed from Shaft End
 Port A Pressurized - CCW
 Port B Pressurized - CW

SHAFT EXTENSIONS


C - $\varnothing 25$ straight, Parallel key A8x7x32 DIN 6885
Max. Torque 34 daNm [3010 lb-in]

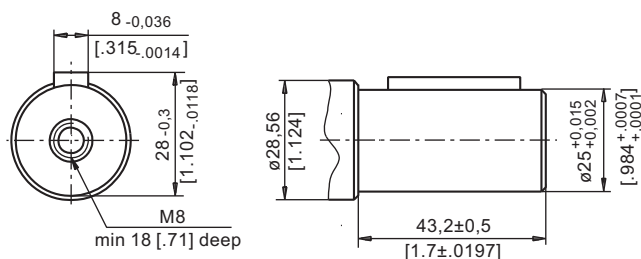


CO - $\varnothing 1"$ straight, Parallel key $\frac{1}{4}" \times \frac{1}{4}" \times \frac{1}{4}"$ BS46
Max. Torque 34 daNm [3010 lb-in]

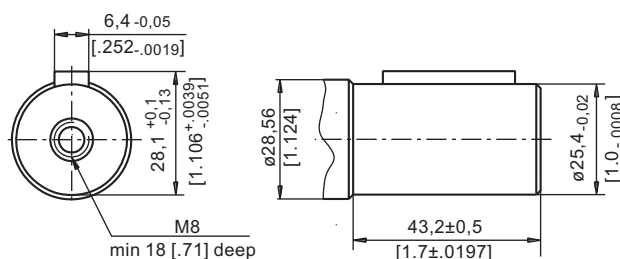


SH - splined, BS 2059 (SAE 6B)
Max. Torque 40 daNm [3540 lb-in]

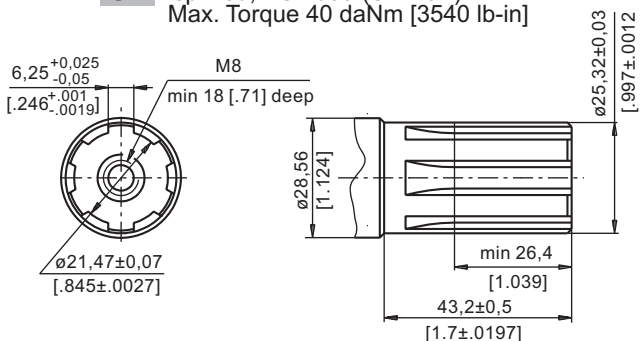

SA - splined, B25x22h9 DIN 5482
Max. Torque 40 daNm [3540 lb-in]

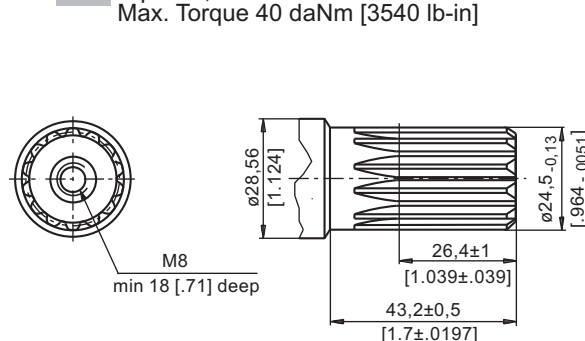


K - tapered 1:10, Parallel key B5x5x14 DIN 6885
Max. Torque 40 daNm [3540 lb-in]

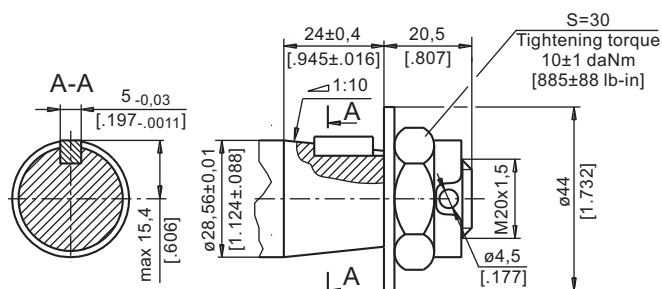


mm [in]

Pressure Losses

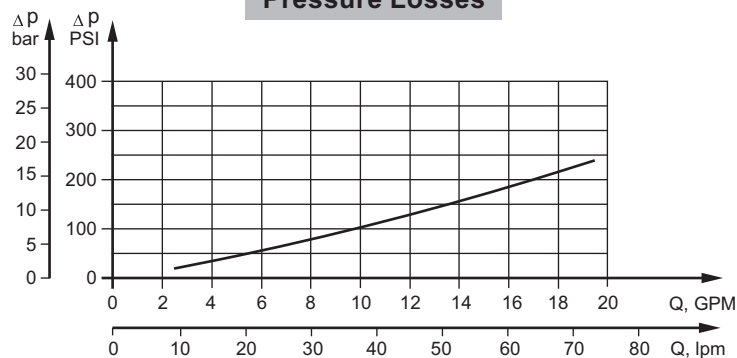


MAX. PERMISSIBLE SHAFT SEAL PRESSURE

1: Drawing for Standard Shaft Seal "D"

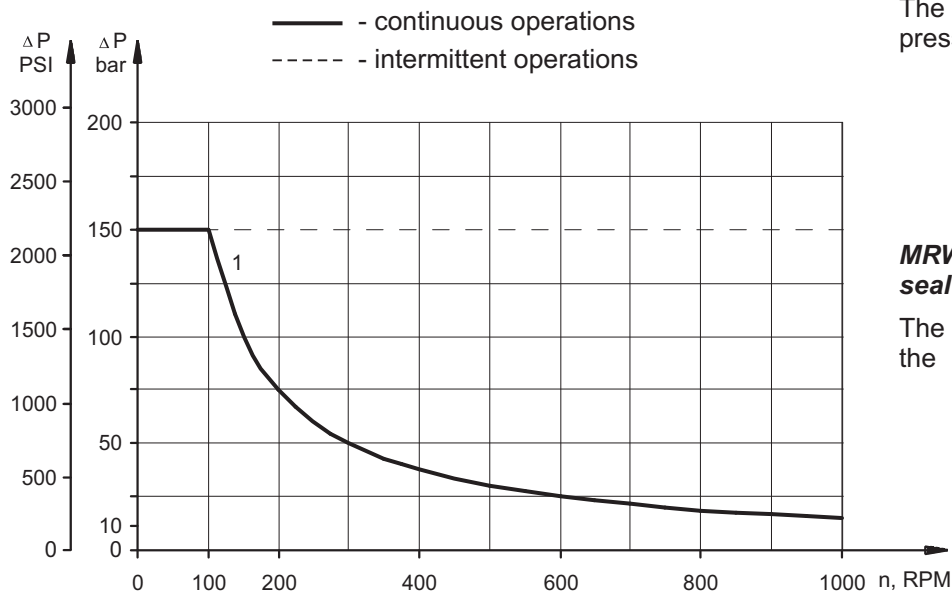


MRW(N)... motors with standard shaft seal and with drain connection:

The shaft seal pressure equals the pressure in the drain line.



MRW(N)...1 motors with standard shaft seal and without drain connection:

The shaft seal pressure never exceeds the pressure in the return line.



ORDER CODE

	1	2	3	4	5	6	7	8	9
M R W				D					

Pos.1 - Option (needle bearings)

omit - none

N - with needle bearings

Pos.2 - Displacement code

50	- 51,5 cm ³ /rev [3.14 in ³ /rev]
80	- 80,3 cm ³ /rev [4.90 in ³ /rev]
100	- 99,8 cm ³ /rev [6.09 in ³ /rev]
125	- 125,7 cm ³ /rev [7.67 in ³ /rev]
160	- 159,6 cm ³ /rev [9.74 in ³ /rev]
200	- 199,8 cm ³ /rev [12.19 in ³ /rev]
250	- 250,1 cm ³ /rev [15.26 in ³ /rev]
315	- 315,7 cm ³ /rev [19.26 in ³ /rev]
400	- 397,0 cm ³ /rev [24.40 in ³ /rev]

Pos.3 - Shaft Extensions*

C	- ø25 straight, Parallel key A8x7x32 DIN6885
CO	- ø1" straight, Parallel key 1/4"x1/4"x1 1/4" BS46
SH	- ø25,32 splined BS 2059 (SAE 6B)
K	- ø28,56 tapered 1:10, Parallel key B5x5x14 DIN6885
SA	- ø24,5 splined B 25x22 DIN 5482

Pos.4 - Shaft Seal Version

D - Standard shaft seal

Pos. 5 - Drain Port

omit - with drain port

1 - without drain port

Pos. 6 - Special Features (not for N-option)

omit - none

LL - Low Leakage

LSV - Low Speed Valve

FR - Free Running

Pos. 7 - Rotation

omit - Standard Rotation

R - Reverse Rotation

Pos. 8 - Option (Paint)**

omit - no Paint

P - Painted

PC - Corrosion Protected Paint

Pos. 9 - Design Series

omit - Factory specified

Notes:

* The permissible output torque for shafts must not be exceeded!

** Colour at customer's request.

The hydraulic motors are mangano-phosphatized as standard.

M+S HYDRAULIC

68, Kozloduy St., 6100 Kazanlak, Bulgaria

Tel.: ++359 431 65167

Fax: +359 431 64114

E-Mail: msh@ms-hydraulic.com