


Adjustable Standpipe Barrel Tee

Type FI-EL ▪ Series L / S

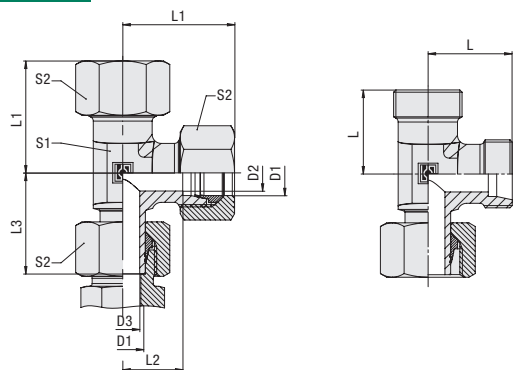

Ordering Codes

***FI-EL*-10*L*-W3*-MS+SV**

* Adjustable Standpipe Barrel Tee

FI-EL

* Outside Tube Diameter D1 (in mm)

-10

* Series

Light Series

L

Heavy Series

S

* Material Code

Steel, zinc/nickel-plated

-W3

Please contact STAUFF for alternative materials and surface finishings.

* Assembling / Kitting

Fitting body assembled with cutting ring and union nut on the standpipe

-SV

Fitting body assembled with cutting rings and union nuts on all ends

-MS+SV

Series	Tube OD mm D1	PN bar	Dimensions mm								Weight kg ca. per 100	Ordering Codes ³
			D2	L	L1 ¹	L2	L3	S1	S2			
L	6	500	4	19	27	12	26	12	14	3,60		FI-EL-06L-W3-SV
	8	500	6	21	29	14	27,5	12	17	4,70		FI-EL-08L-W3-SV
	10	500	8	22	30	15	29	14	19	6,10		FI-EL-10L-W3-SV
	12	400	10	24	32	17	29,5	17	22	8,30		FI-EL-12L-W3-SV
	15	400	12	28	36	21	32,5	19	27	14,40		FI-EL-15L-W3-SV
	18	400	15	31	40	23,5	35,5	24	32	20,70		FI-EL-18L-W3-SV
	22	250	19	35	44	27,5	38,5	27	36	29,30		FI-EL-22L-W3-SV
	28	250	24	38	47	30,5	41,5	36	41	40,80		FI-EL-28L-W3-SV
	35	250	30	45	56	34,5	51	41	50	65,00		FI-EL-35L-W3-SV
	42	250	36	51	63	40	56	50	60	87,90		FI-EL-42L-W3-SV
S	6	800	4	23	31	16	27	12	17	5,80		FI-EL-06S-W3-SV
	8	800	5	24	32	17	27,5	14	19	7,80		FI-EL-08S-W3-SV
	10	800	7	25	34	17,5	30	17	22	10,20		FI-EL-10S-W3-SV
	12	630	8	29	38	21,5	31	17	24	13,50		FI-EL-12S-W3-SV
	14	630	10	30	40	22	35	19	27	17,70		FI-EL-14S-W3-SV
	16	630	12	33	43	24,5	36,5	24	30	23,70		FI-EL-16S-W3-SV
	20	400	16	37	48	26,5	44,5	27	36	36,50		FI-EL-20S-W3-SV
	25	400	20	42	54	30	50	36	46	63,70		FI-EL-25S-W3-SV
	30	400	25	49	62	35,5	55	41	50	88,90		FI-EL-30S-W3-SV
	38	420	32	57	72	41	63	50	60	135,80		FI-EL-38S-W3-SV

Connecting Parts



Cutting Ring
Type **FI-DS**

Page 28



Soft-Sealing Cutting Ring
Type **FI-WDDS**

Page 29



Support Sleeve
Type **FI-VH**

Page 31




STAUFF Form EVO Sealing Ring
Type **FI-FD**

Page 32



Union Nut
Type **FI-M**

Page 33



37° Flared Tube Fitting Set
Type **FI-AB**

Page 37


¹ Approximate dimension in assembled condition.

² Weight including cutting ring and union nut on the standpipe.

³ Standard scope of delivery: Fitting body assembled with cutting ring and union nut on the standpipe.

Please note: Standpipes are always factory-assembled with cutting rings and union nuts.

The union nut assembled on the standpipe has to be tightened by only 1/12 a turn (equivalent to 30°) beyond the fixed point.



Typical application with a
Straight Male Stud Fitting FI-GE-...

