


Straight swivel fittings TrAle

Stainless Steel AISI 316-L

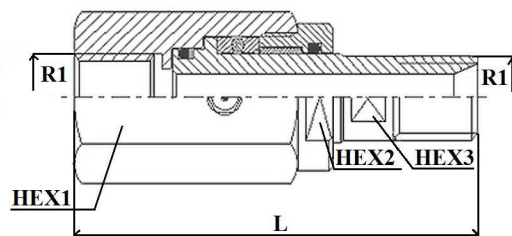

Seals: FKM

Working temperature: -15°C a +250°C

Rotation speed: 5-10 rpm

Part n°	R1	L	HEX 1	HEX 2	HEX 3	Max. static press.
Z GGL 1/4	1/4" BSP	75	27	24	11	350
Z GGL 3/8	3/8" BSP	88	34	30	14	350
Z GGL 1/2	1/2 " BSP	101	36	32	18	300
Z GGL 3/4	3/4" BSP	110	45	40	24	250
Z GGL 1	1" BSP	124	Ø55	50	30	250
Z GGL 1 1/4	1" 1/4 BSP	129	Ø60	55	38	180
Z GGL 1 1/2	1" 1/2 BSP	138	Ø75	68	41	150
Z GGL 2	2" BSP	149	Ø85	80	55	150

Warning: The swivel joints in line and 90 ° are NOT eligible for fast and continuous rotation, but only for angular displacement