


SINGLE PARTS PLUG

THE WORLD OF TUBE FITTINGS

STO BLANKING PLUG

For cones with taper and O-ring according to DIN 3865.

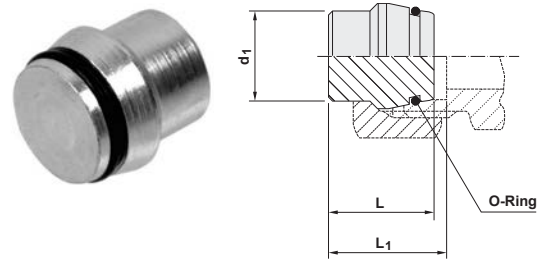

description	pipe OD	PN series	L	L ₁	O-Ring	kg % pc.
STO 6-L/S/O	6	L 500 (2200)	18.5	20.0	4x1.5	0.6
STO 8-L/S/O	8	L 500 (2200)	18.5	20.0	6x1.5	0.9
STO 10-L/S/O	10	L 500 (2200)	20.0	21.0	7.5x1.5	1.4
STO 12-L/S/O	12	L 400 (1700)	20.5	21.5	9x1.5	1.9
STO 15-L/O	15	L 400 (1700)	20.5	21.5	12x2	3.1
STO 18-L/O	18	L 400 (1700)	22.5	24.0	15x2	6.2
STO 22-L/O	22	L 250 (1100)	25.0	26.5	20x2	9.9
STO 28-L/O	28	L 250 (1100)	25.5	27.0	26x2	15.1
STO 35-L/O	35	L 250 (1100)	30.0	33.0	32x2.5	25.2
STO 42-L/O	42	L 250 (1100)	30.0	33.5	38x2.5	35.9
STO 6-L/S/O	6	S 800 (3400)	18.5	20.0	4x1.5	0.6
STO 8-L/S/O	8	S 800 (3400)	18.5	20.0	6x1.5	0.9
STO 10-L/S/O	10	S 800 (3400)	20.0	21.5	7.5x1.5	1.4
STO 12-L/S/O	12	S 630 (2700)	20.5	22.0	9x1.5	1.9
STO 14-S/O	14	S 630 (2700)	22.5	24.5	10x2	2.6
STO 16-S/O	16	S 630 (2700)	23.5	26.0	12x2	4.6
STO 20-S/O	20	S 400 (1700)	28.5	31.5	16.3x2.4	7.7
STO 25-S/O	25	S 400 (1700)	29.0	32.5	20.3x2.4	11.9
STO 30-S/O	30	S 400 (1700)	30.5	35.5	25.3x2.4	17.9
STO 38-S/O	38	S 400 (1700)	33.0	40.5	33.4x2.4	30.8

Please see "Engineering and technical data - Selecting the correct tube fitting" for more information on pressure.