


SAE FL90

SAE 'O' ring flange. Code 61.
90° swept elbow.

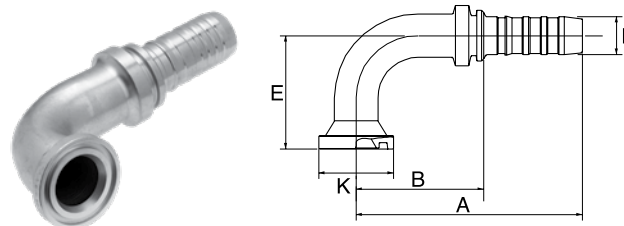


D				A	B	E	K	KIT	REF.
-size	DN	"		mm	mm	mm	mm		GSP
-24	40	1.1/2	1.1/2"	184.0	109.9	81.0	60.3	24 PA-FL	24GSP24FL90S
-24	40	1.1/2	2"	175.0	101.9	80.0	71.4	32 PA-FL	24GSP32FL90-080
-32	50	2	1.1/2"	197.0	104.8	81.0	60.3	24 PA-FL	32GSP24FL90S
-32	50	2	2"	222.0	114.0	114.0	71.4	32 PA-FL	32GSP32FL90-114

Details on flange kits see page 250. / S: Short drop per ISO 12151-3.

DIN 24° FDLORX


Female DIN 'O' ring swivel. 24° cone.
Light series.

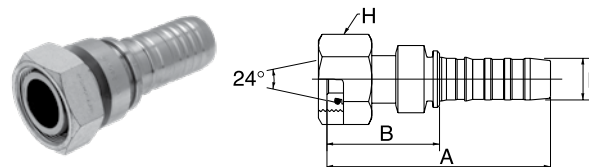

D				A	B	H	REF.
-size	DN	"		mm	mm	mm	GSP
-24	40	1.1/2	M52 x 2.0	135.7	62.0	60.0	24GSP42FDLORX

DIN 24° FDLORX45

Female DIN 'O' ring swivel. 24° cone.
Light series. 45° swept elbow.

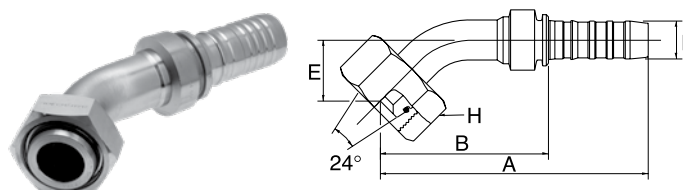

D				A	B	E	H	REF.
-size	DN	"		mm	mm	mm	mm	GSP
-24	40	1.1/2	M52 x 2.0	208.9	135.2	44.0	60.0	24GSP42FDLORX45

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.