
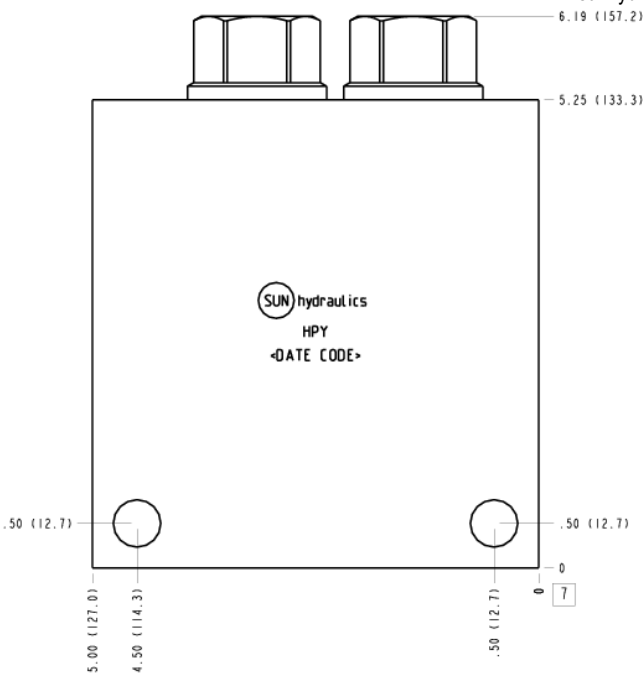


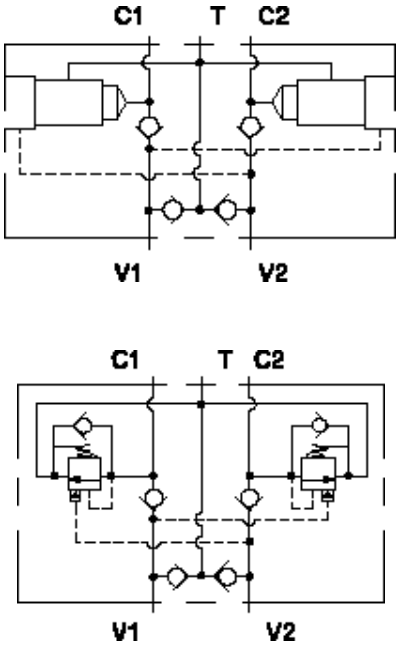

**TECHNICAL DATA**

|                                |                                  |
|--------------------------------|----------------------------------|
| Body Type                      | Line mount                       |
| Interface                      | None                             |
| Body Features                  | Cushion lock with make up checks |
| Includes integral cartridge(s) | Yes (see Included Components)    |
| Mounting Hole Diameter         | .53 in.                          |
| Mounting Hole Depth            | Through                          |
| Mounting Hole Quantity         | 2                                |
| Open Cavities                  | 2                                |
| Cavity                         | T-17A                            |
| Port Size                      | 1 1/4" BSPP                      |
| Model Weight                   | 12.31 lb.                        |

**NOTES** *Important:* Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

| Modifiers                                     | Ports                                                   |
|-----------------------------------------------|---------------------------------------------------------|
| HPY, /10, /11, /15, /16, /S, /S3, /V, /Y, /Y3 | Ports C1, C2, V1, V2: 1 1/4" BSPP; Port T: 1 1/4" BSPP; |

INCLUDED COMPONENTS

| Part    | Description | Quantity |
|---------|-------------|----------|
| CXGDXAN | Cartridge   | 2        |
| CXHAXAN | Cartridge   | 2        |

CONFIGURATION OPTIONS

Model Code Example: HPY

MODIFIER


|                                                                                      |
|--------------------------------------------------------------------------------------|
| 6061-T651 Aluminum, Buna-N                                                           |
| /11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I  |
| /10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II |
| /V 6061-T651 Aluminum, Viton                                                         |
| /16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I   |
| /15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II  |
| /S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil                                     |
| /S4 65-45-12 Ductile Iron, Buna-N, Chem. Black                                       |
| /S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer              |
| /Y 65-45-12 Ductile Iron, Viton, Dewatering Oil                                      |
| /Y4 65-45-12 Ductile Iron, Viton, Chem. Black                                        |
| /Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer               |

MANIFOLD FACES


FACE GRID

|   |    |    |    |
|---|----|----|----|
| 1 | 2  | 3  | 4  |
| 5 | 6  | 7  | 8  |
| 9 | 10 | 11 | 12 |


Face 2

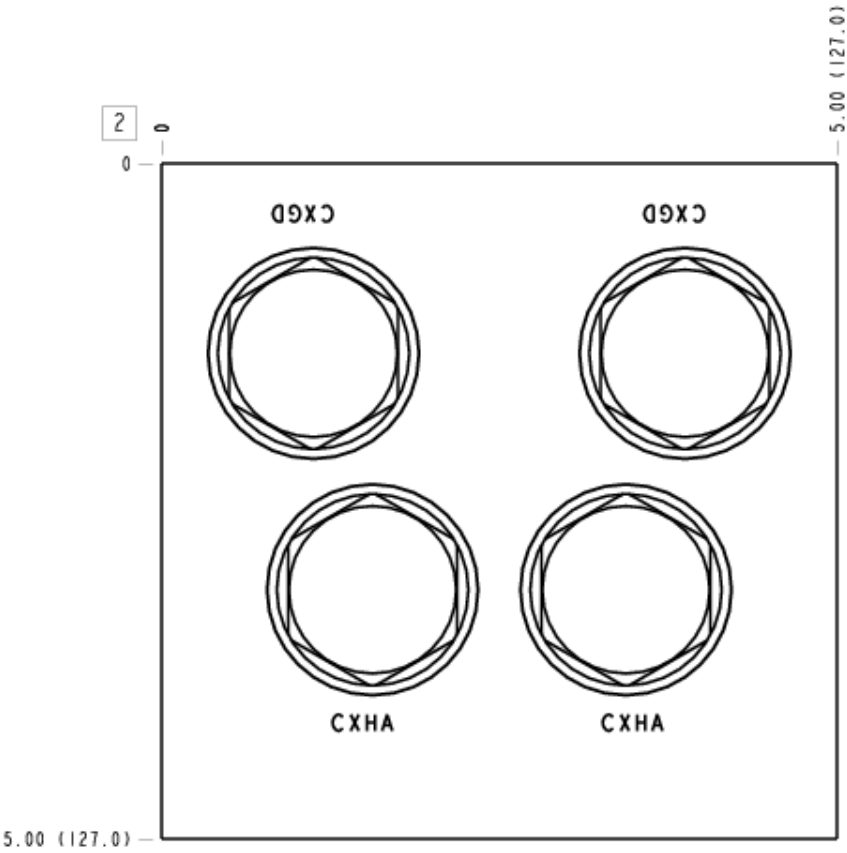


Face 5

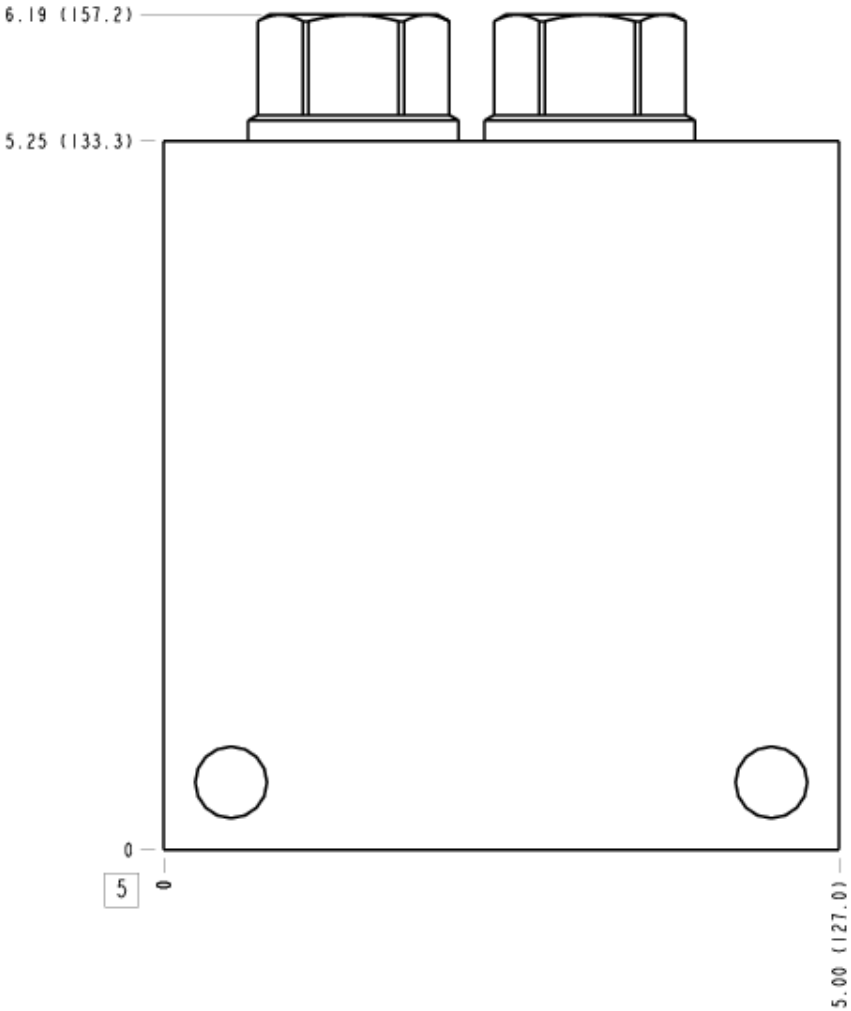


Face 6

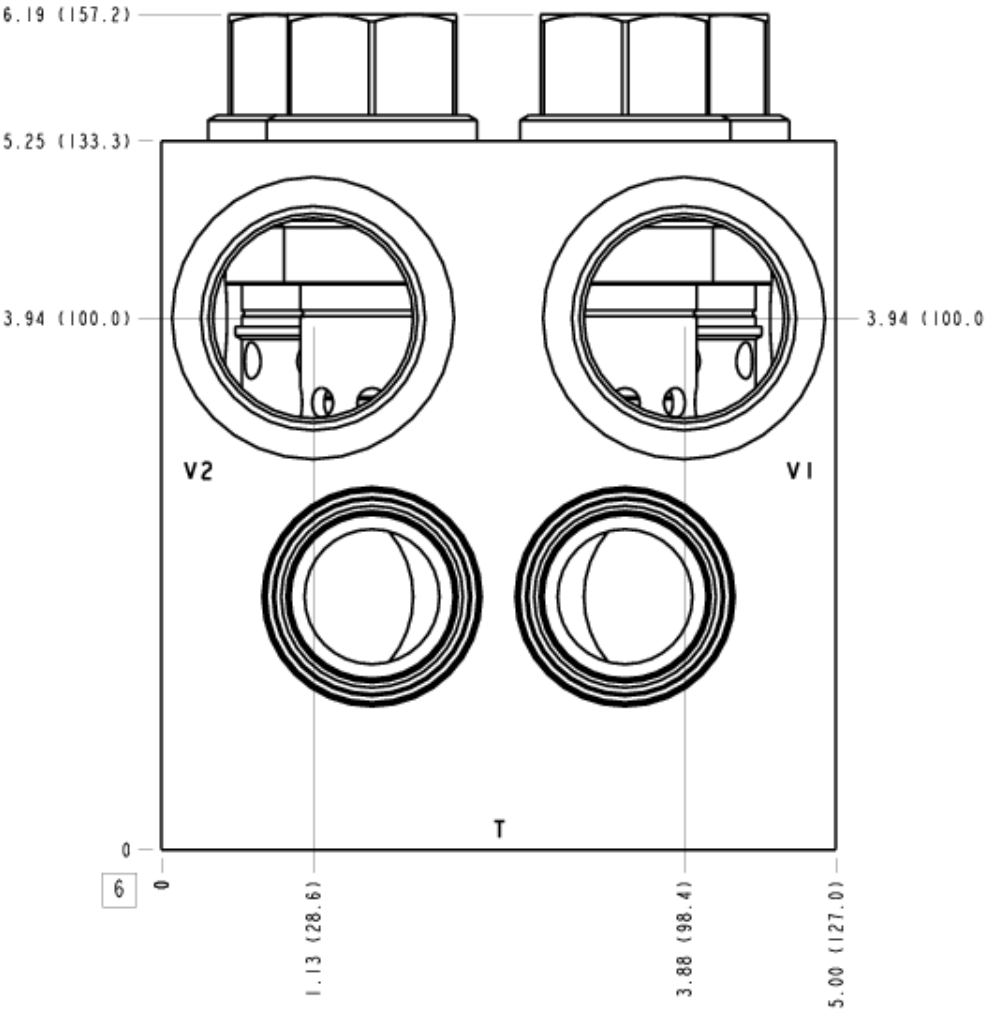

Face 7

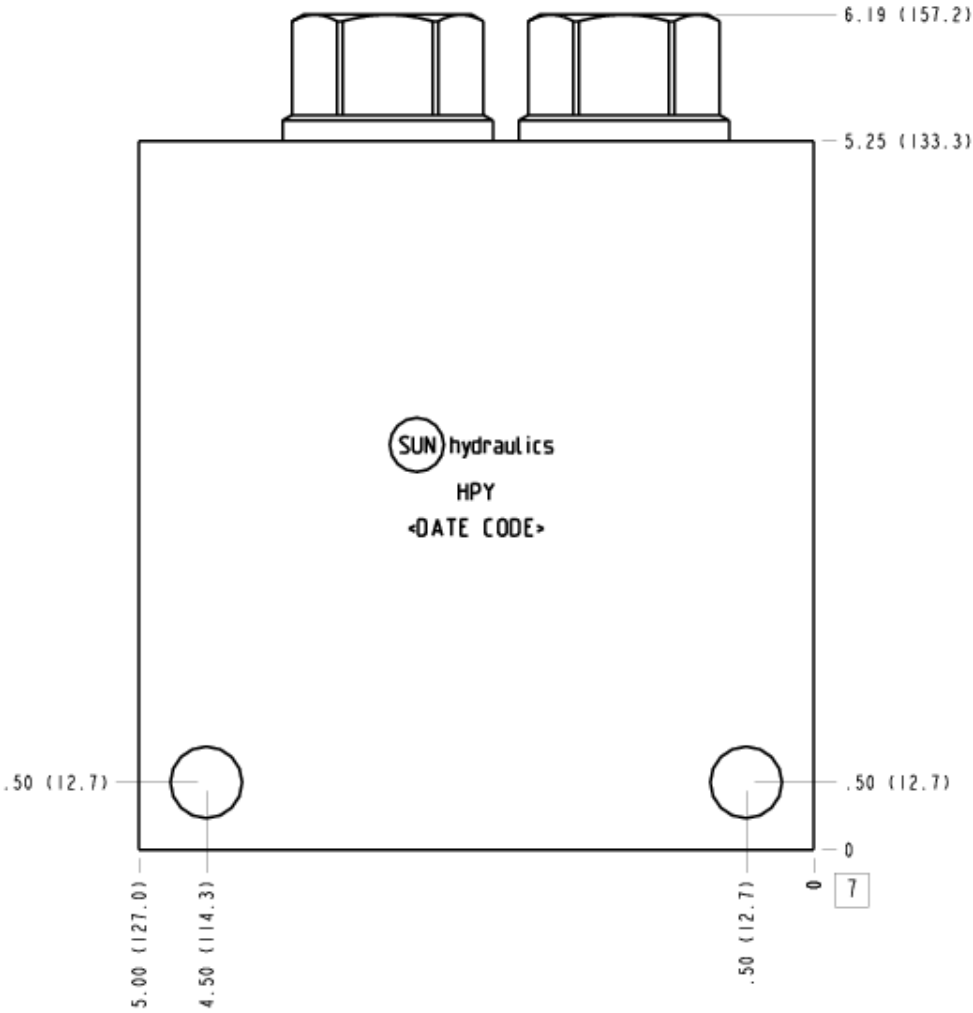

Face 8

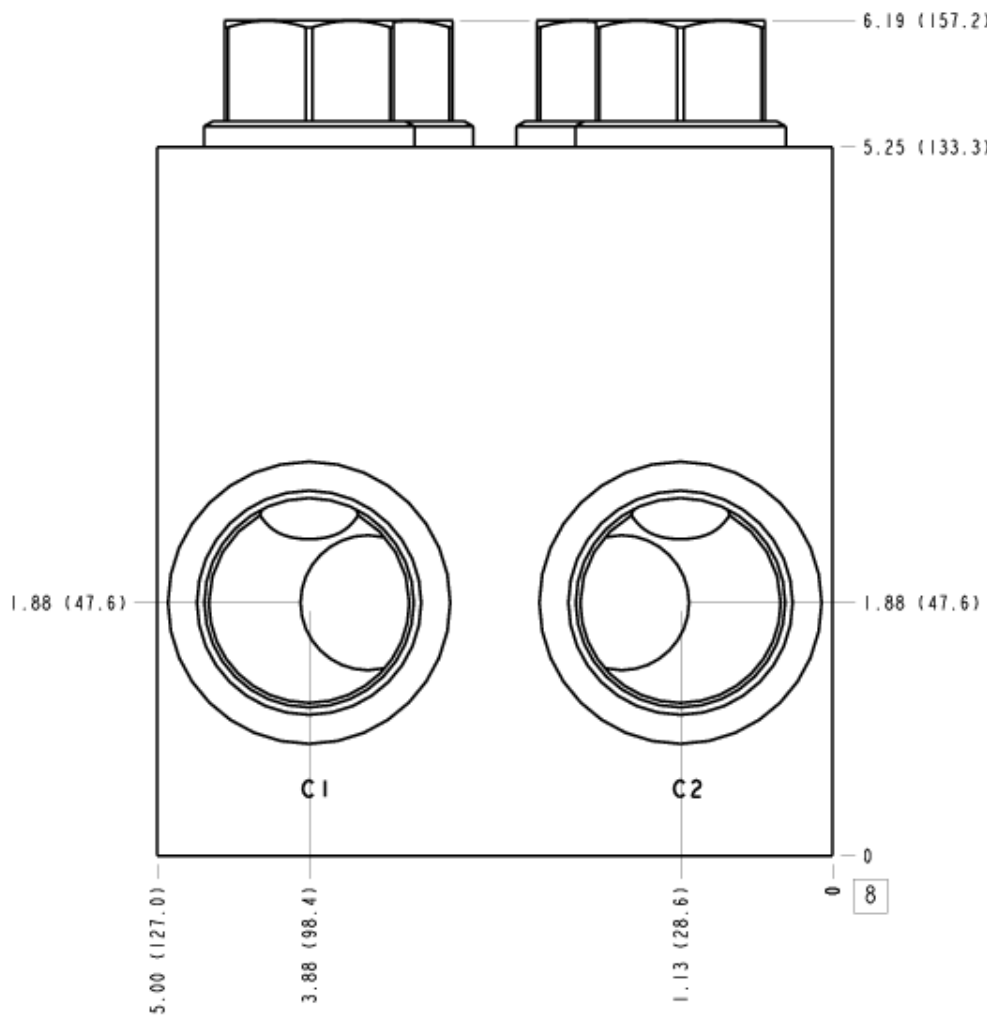

## Face 10

