

Technische Daten

BAUFORM

Kugelhahn aus Messing mit Schlauchanschluss. Abdeckkappe mit Flügelgriff.

BETÄTIGUNG

90°-Drehung der Abdeckkappe

ANSCHLUSS

Außengewinde ½", ISO 228

ZULÄSSIGE MEDIEN

Luft und Wasser

TEMPERATUR

Luft: -15°C bis max. +110°C
Wasser: 0°C bis max. +90°C

WERKSTOFFE

Gehäuse: Messing vernickelt
Kugel: Messing-verchromt
Kugeldichtung: PTFE
Spindeldichtung: NBR

Alle Angaben sind freibleibend und unverbindlich!

Specification

DESIGN

Drain Ball Valve with brass hose connection. Cap should be used with butterfly handle.

OPERATION

Rotation of the cap through 90°.

CONNECTION

Male thread ½", ISO 228

MEDIA

air and water, oil

TEMPERATURE RANGE

Air: -15°C up to +110°C
Water: 0°C up to +90°C

MATERIALS

Body: Brass (nickle plated)
Ball: Brass (chrome-plated)
Ball seal: PTFE
Stem seal: NBR

The above information is intended for guidance only and the company reserves the right to change any data herein without prior notice!

Artikel: **SF-30-KRAN**

Befüll- u. Ablass-
Kugelhahn
PN 16

Messing




Type: **SF-30-KRAN**

Re fill and Drain Ball
Valve
PN 16

Brass

Abmessungen / Dimension

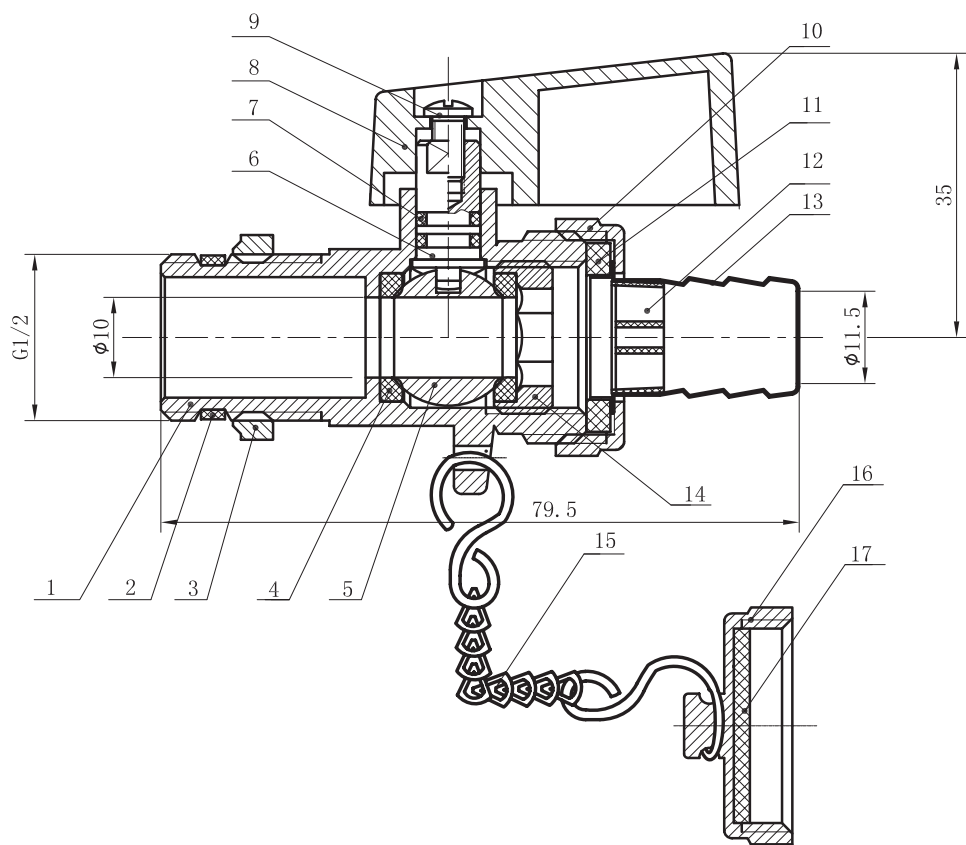

Pos	Bezeichnung / Description		Material / Material	
1	Gehäuse	Body	Messing vernickelt	Brass nickle plated
2	PTFE Ring	PTFE Ring	PTFE	PTFE
3	Verschraubung	Holt nut	Messing vernickelt	Brass nickle plated
4	Kugeldichtung	Ball seat	PTFE	PTFE
5	Kugel	Ball	Messing-verchromt	Brass chrome-plated
6	Spindel	Stem	Messing	Brass
7	O-Ring	O-Ring	NBR	NBR
8	Flügelgriff	Butterfly handle	Aluminium	Aluminium
9	Schraube	Screw	Messing vernickelt	Brass nickle plated
10	Verschraubung	Cap	Messing vernickelt	Brass nickle plated
11	Dichtung	Rubber	NBR	NBR
12	Siebeinsatz	Water divider	ABS	ABS
13	Schlauchanschluss	Outlet	Messing vernickelt	Brass nickle plated
14	Stoffbuchse	Inner gland	Messing vernickelt	Brass nickle plated
15	Kette	Tie	Messing vernickelt	Brass nickle plated
16	Verschlussdeckel	Bonnet	Messing vernickelt	Brass nickle plated
17	Dichtung	Rubber	NBR	NBR

