


# VEDANTE OV FLANGE SAE SUPERCAT

FLANGE OV SEAL SAE SUPERCAT

**Material:** Poliuretano  
**Temperatura:** -35/+110°C  
**Pressão máxima de trabalho:** 450 bar

**Material:** Polyurethane  
**Temperature:** -35/+110°C  
**Max. working Pressure:** 450 bar

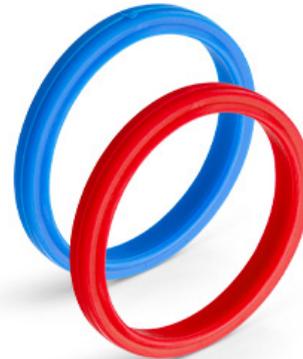

Ø INTERNO Ø INTERNAL mm	Ø EXTERIOR Ø OUTSIDE mm	TAMANHO SIZE mm	ALTURA HEIGHT mm
17.02	25.40	1/2"	5.00
23.36	31.72	3/4"	5.00
31.24	39.62	1"	5.00
36.07	44.45	1"1/4	5.00
45.34	53.98	1"1/2	5.00
54.86	63.50	2"	5.00

PROPERTIES	METHOD	MEASURE UNIT	SPECIFICATIONS	FOUND DATA
Melt flow index	ISO 1133	g/10' 220°C 3,80 Kg	15 -40	20
Hardeness Shore A	DIN 53505		92,0 -96,0	95.9
Tensile strength	DIN 53504	Mpa	>=30	35
Modulus 100%	DIN 53504	Mpa	>=7	11
Modulus 300%	DIN 53504	Mpa	>=15	23
Elongation at brake	DIN 53504	%	>=425	502