

INTERPUMP HYCELSIUS 1SN


TFDH011B

APPLICATIONS :



APPLICABLE SPECS. :

EN 853 1SN SAE 100R1AT

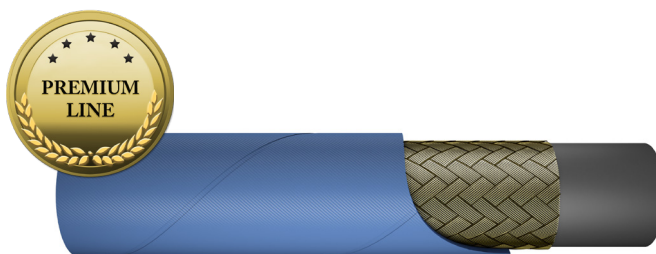

Wide range temperature resistance. Hoses are not designed and not approved for "air brake" applications on railway and/or mobile equipment. Do not use with compressor.

Internal hose: Synthetic rubber, extruded whole without joints, of uniform thickness.

Reinforcement: 1 steel wire braid.

Covering: Anti-abrasive synthetic rubber, resistant to oils, fuels and atmospheric conditions.

Recommended fluid: Hydraulic fluids petroleum based (mineral oils), glycol-water based, water, lubricants.

Operating temperature: from -40 to +135°C (intermittent 140°C).

Part number	ID		Size	OD	Max WP		Min BP		Min BR		Weight		Ferrule
	in	mm		mm	bar	psi	bar	psi	mm	inch	kg/m	lb/ft	
TFDH011B04	1/4"	6.4	4	13.4	225	3263	900	13050	100	3.937	0,225	0.151	0001-04
TFDH011B05	5/16"	8.0	5	15.0	215	3118	860	12325	115	4.528	0,252	0.169	0001-05
TFDH011B06	3/8"	9.5	6	17.4	180	2610	720	10440	130	5.118	0,337	0.226	0001-06
TFDH011B08	1/2"	12.7	8	20.6	160	2320	640	9280	180	7.087	0,404	0.271	0001-08
TFDH011B10	5/8"	16.0	10	23.7	130	1885	520	7540	200	7.874	0,476	0.320	0001-10
TFDH011B12	3/4"	19.0	12	27.7	105	1523	420	6090	240	9.449	0,601	0.404	0001-12
TFDH011B16	1 "	25.4	16	35.6	88	1276	352	5075	300	11.811	0,903	0.607	0001-16
TFDH011B20	1.1/4"	31.8	20	43.5	63	914	252	3625	420	16.535	1,272	0.855	0001-20
TFDH011B24	1.1/2"	38.1	24	50.8	50	725	200	2900	500	19.685	1,596	1.073	0001-24
TFDH011B32	2 "	50.8	32	63.6	40	580	160	2320	630	24.803	2,222	1.493	0001-32
TFDH011B40	2.1/2"	63.5	40	77.4	30	435	120	1741	760	29.921	2.755	1.851	0001-40

Available also with black cover. In case of order use TFDH011N.

MARKING: Available only "embossed"