


Coil options


With ISO4400 connector

(weather protection IP65)

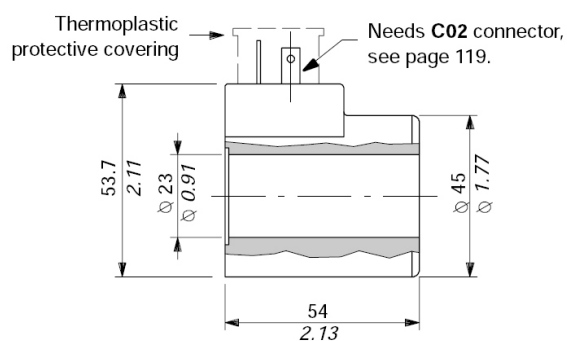

With integrated DEUTSCH 04 connector

(weather protection IP67)

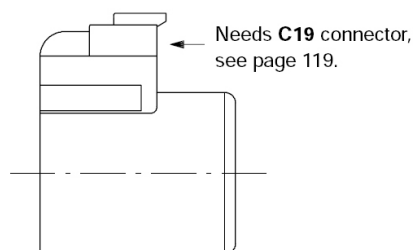

Operating features

Nominal voltage : 12VDC / 24VDC

Nominal voltage tolerance . . . : ±10%

Power rating : 38 W

Duty cycle : 100%

Weather protection : Depending on connector type

Coil insulation : Class H