


CONFIGURATION

/T Modifier 65-45-12 Ductile Iron, Metric,
Buna-N, Dewatering Oil

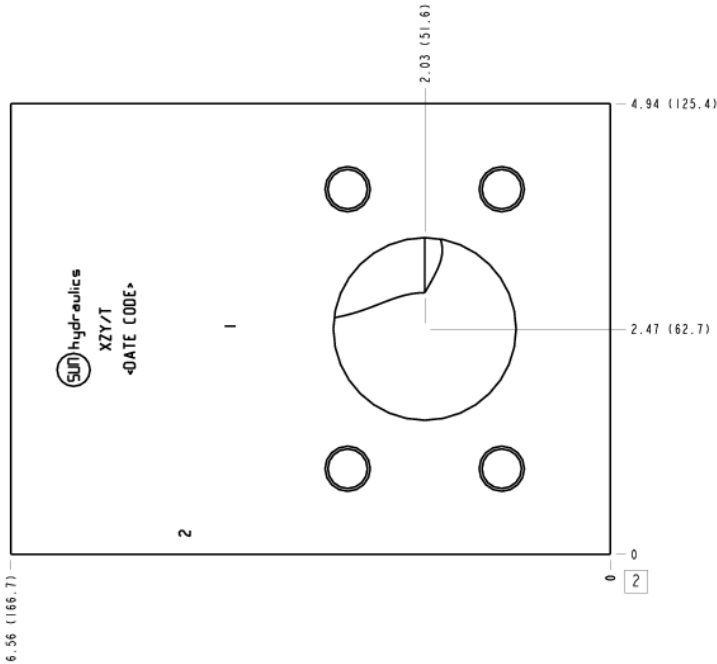

TECHNICAL DATA

Body Type	Line mount
Interface	None
Body Features	Parallel cavities
Mounting Hole Thread	.375-16 UNC - 2B in.
Mounting Hole Thread	M16x2,0 - 6H (metric models)
Mounting Hole Depth	.62 in.
Mounting Hole Quantity	2
Open Cavities	2
Cavity	T-18A
Port Size	2" Code 61
Model Weight	30.08 lb.

- NOTES
- Flange mounting hole data: Inch: 1/2-13 UNC x 1.06 (26,9 mm) DP, Metric: M12 x 1.75-6H x 1.06 (26,9 mm) DP
 - **Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
XZY, /10, /11, /1A, /1B, /M	All Ports: 2" Code 61;

CONFIGURATION OPTIONS

Model Code Example: XYZArray


MODIFIER	(/T)
/T	65-45-12 Ductile Iron, Metric, Buna-N, Dewatering Oil
	6061-T651 Aluminum, Buna-N
/10	6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/11	6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/1A	6061-T651 Aluminum, Metric, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/1B	6061-T651 Aluminum, Metric, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/M	6061-T651 Aluminum, Metric, Buna-N
/S	65-45-12 Ductile Iron, Buna-N, Dewatering Oil
/S3	65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
/S4	65-45-12 Ductile Iron, Buna-N, Chem. Black
/S5	65-45-12 Ductile Iron, Buna-N, Electroless Nickel
/T3	65-45-12 Ductile Iron, Metric, Buna-N, Trivalent Clear Zinc with Top Sealer
/T4	65-45-12 Ductile Iron, Metric, Buna-N, Chem. Black
/T5	65-45-12 Ductile Iron, Metric, Buna-N, Electroless Nickel

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


Face 2

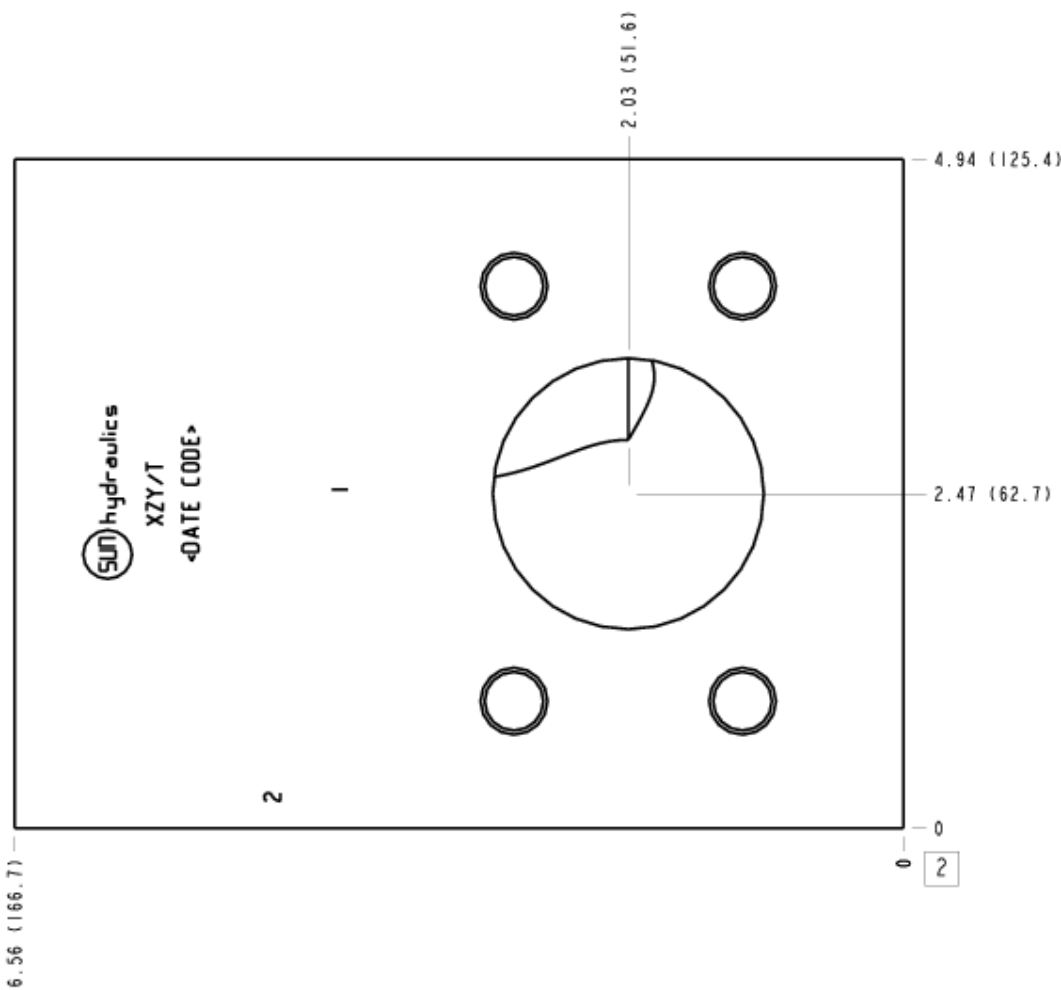

Face 5

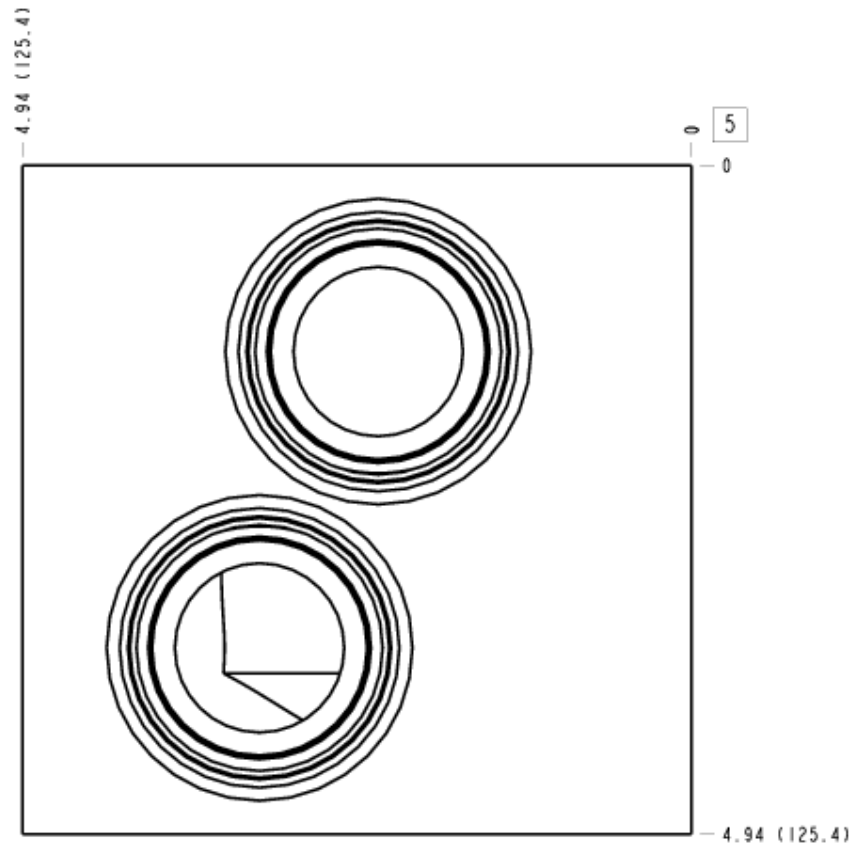

Face 6

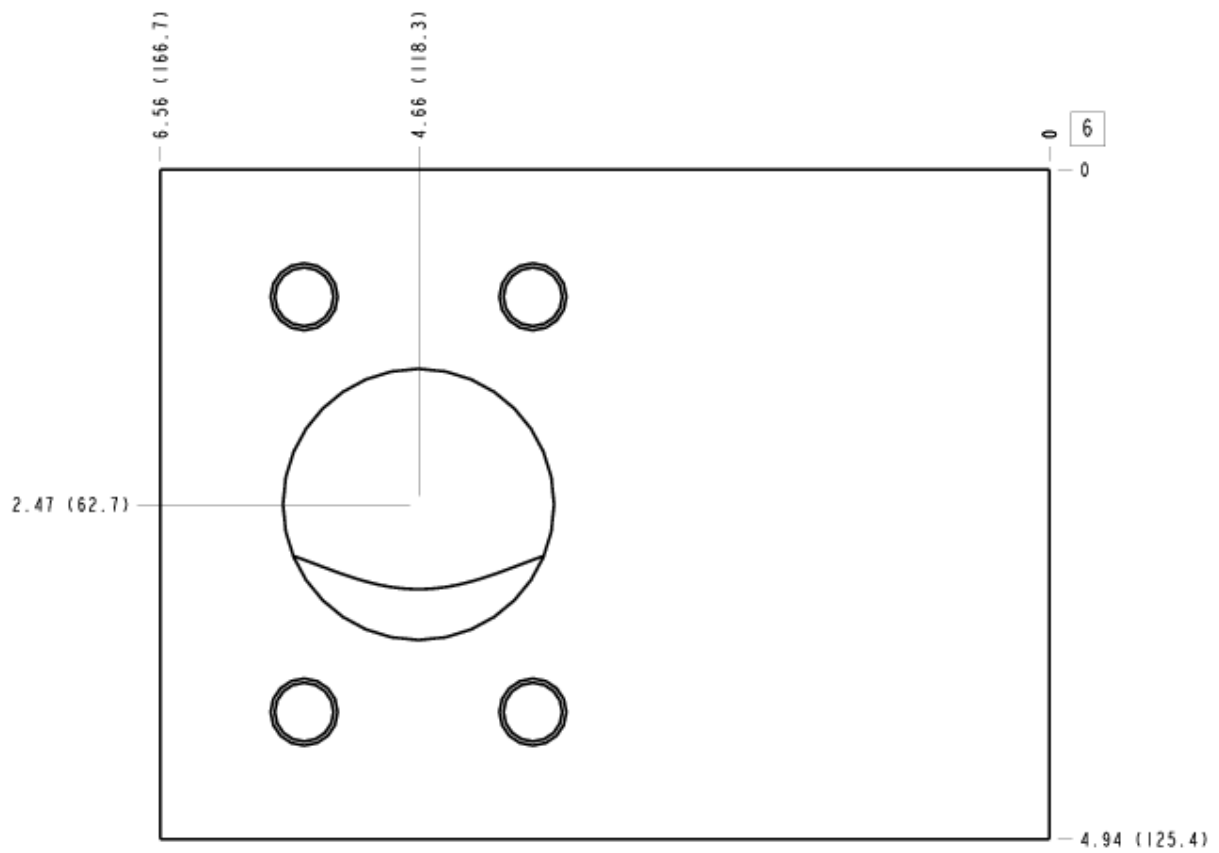

Face 7

