


CONNECTORS O-RING FACE SEAL

505029

45° (ADJ) elbow male ORFS - male Metric with O.R. and retaining ring ISO 9974 ports

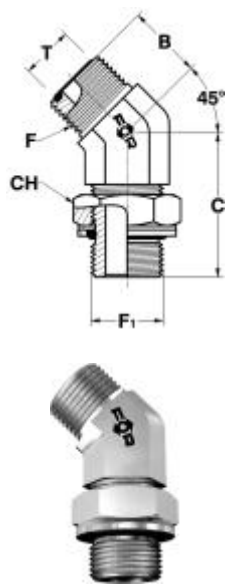

T		RIFERIMENTO REFERENCE	F	F ₁	B	C	CH
MM.	IN.						
6	1/4	A505029-0612	9/16-18 UNF-2A	M12x1,5-6g	16	30	17
8-10	5/16-3/8	A505029-1014	11/16-16 UN-2A	M14x1,5-6g	19	33	19
8-10	5/16-3/8	A505029-1016	11/16-16 UN-2A	M16x1,5-6g	19	33	22
12	1/2	A505029-1218	13/16-16 UN-2A	M18x1,5-6g	20,5	36,5	24
14÷16	5/8	A505029-1618	1"-14 UNS-2A	M18x1,5-6g	23,5	41,5	24
14÷16	5/8	A505029-1622	1"-14 UNS-2A	M22x1,5-6g	23,5	44	27
18-20	3/4	A505029-2027	1"3/16-12 UN-2A	M27x2-6g	26	50	32
22-25	7/8-1"	A505029-2533	1"7/16-12 UN-2A	M33x2-6g	30	52,5	41
28÷32	1"1/4	A505029-3242	1"11/16-12 UN-2A	M42x2-6g	32	53,5	50
35-38	1"1/2	A505029-3848	2"-12 UN-2A	M48x2-6g	37	55,5	55
6	1/4	SA505029-0610	9/16-18 UNF-2A	M10x1-6g	17	27	14
6	1/4	SA505029-0614	9/16-18 UNF-2A	M14x1,5-6g	18	31,5	19
8-10	5/16-3/8	SA505029-1018	11/16-16 UN-2A	M18x1,5-6g	20	36,5	24
12	1/2	SA505029-1214	13/16-16 UN-2A	M14x1,5-6g	20,5	33	19
12	1/2	SA505029-1222	13/16-16 UN-2A	M22x1,5-6g	22	44	27
12	1/2	SA505029-1227	13/16-16 UN-2A	M27x2-6g	24	50	32
14÷16	5/8	SA505029-1627	1"-14 UNS-2A	M27x2-6g	28	50	32
18-20	3/4	SA505029-2022	1"3/16-12 UN-2A	M22x1,5-6g	30	44,5	27
18-20	3/4	SA505029-2026	1"3/16-12 UN-2A	M26x1,5-6g	29	50	36
22-25	7/8-1"	SA505029-2526	1"7/16-12 UN-2A	M26x1,5-6g	30	51,5	36
22-25	7/8-1"	SA505029-2527	1"7/16-12 UN-2A	M27x2-6g	30	51,5	32

FOR S.P.A. - NORME E DIMENSIONI SOGGETTE A MODIFICHE SENZA PREAVVISO.
FOR S.P.A. - DESIGN DETAILS AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.