


AUßENGEWINDE - SCHLAUCHNIPPEL

Type 8051

metrisch, leichte Baureihe , 24° Innen-Konus nach DIN 3861

NIPPLE WITH OUTSIDE THREAD

metric, light type, 24° inner cone according to DIN 3861

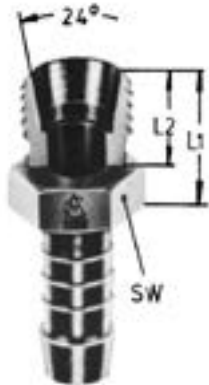

DN (NW)	für Rohr-Ø for pipe-Ø	für Schlauch- Innen-Ø for hose inside Ø	SW	Gewinde thread	L 1	L 2	Bestell-Nr. part-no
		mm	mm		mm	mm	
3	5	4 - 5	11	M 10 x 1	12	8	8051.0300
4	6	5 - 6	12	M 12 x 1,5	14	10	8051.0400
6	8	7 - 8	14	M 14 x 1,5	15	10	8051.0600
8	10	9 - 10	17	M 16 x 1,5	16	11	8051.0800
10	12	11 - 12	19	M 18 x 1,5	16	11	8051.1000
10/8	12	9 - 10	19	M 18 x 1,5	16	11	8051.1008
13	15	14 - 15	22	M 22 x 1,5	18	12	8051.1300
13/8	15	9 - 10	22	M 22 x 1,5	18	12	8051.1308
13/10	15	11 - 12	24	M 22 x 1,5	18	12	8051.1310
16	18	17 - 18	27	M 26 x 1,5	19	12	8051.1600
16/13	18	14 - 15	27	M 26 x 1,5	19	12	8051.1613
20	22	21 - 22	32	M 30 x 2	21	14	8051.2000
20/16	22	17 - 18	32	M 30 x 2	21	14	8051.2016
25	28	24 - 25	41	M 36 x 2	22	14	8051.2500




AUßENGEWINDE - SCHLAUCHNIPPEL

Type 8052

metrisch, schwere Baureihe , 24° Innen-Konus nach DIN 3861

NIPPLE WITH OUTSIDE THREAD

metric, heavy type, 24° inner cone according to DIN 3861

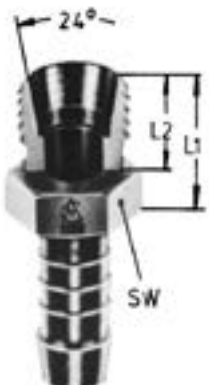

DN (NW)	für Rohr-Ø for pipe-Ø	für Schlauch- Innen-Ø for hose inside Ø	SW	Gewinde thread	L 1	L 2	Bestell-Nr. part-no
		mm	mm		mm	mm	
8	12	9 - 10	22	M 20 x 1,5	19	12	8052.0800