



Round Steel U-Bolt with Plastic Pipe Saddle (Long) Type RB+RUL

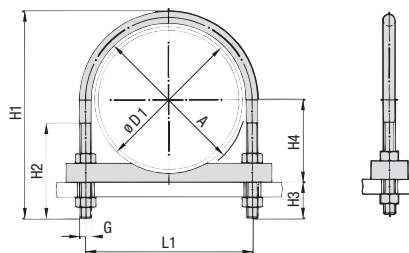

Round Steel U-Bolt (type RB) with Plastic Pipe Saddle (type RUL)



Ordering Codes

Clamp Assembly *RB+RUL-*48.3-*PP-*W1

One clamp assembly is consisting of one Round Steel U-Bolt (type RB), one Plastic Pipe Saddle (type RUL) and four Nuts (to DIN EN ISO 4032).

* Clamp Assembly (as listed above)	RB+RUL
* Exact outside diameter Ø D1 (mm)	48.3
* Material of Pipe Saddle (see below)	PP
* Material code Carbon Steel, uncoated	W1
Carbon Steel, zinc-plated, blue-chromated	W32
Stainless Steel V4A 1.4401 / 1.4571 (AISI 316 / 316 Ti)	W5

Please note: All items are supplied non-assembled.

Standard Materials for Plastic Pipe Saddles

Polypropylene
Colour: Green
Material code: **PP**

Polyamide
Colour: Black
Material code: **PA**

See pages 178 / 179 for material properties and technical information.

Alternative materials are available upon request.
Please contact STAUFF for further information.

Applications

- Standing or hanging installation of pipes and tubes on beams, profiles and consoles
- Design with two threaded ends allows for ideal adaptation to suit the exact outer diameter of the pipe or tube

Diameter Nominal	Outside Diameter Pipe / Tube Ø D1		Nominal Bore Pipe	Dimensions (mm/in)							
DN	(mm)	(in)	(in)	Round Steel U-Bolt (Type RB)	A	L1	H1	H2	H3	H4	Thread G
20	25	.98		30	40	73,5	41	30	17,5		M10
					1.57	2.89	1.61	1.18	.69		
	26,9	1.06	3/4	1.18	40	73,5	41	30	18,5		M10
					1.57	2.89	1.61	1.18	.73		
25	30	1.18		38	48	81	48	30	20		M10
					1.89	3.19	1.89	1.18	.79		
	33,7	1.33	1	1.50	48	81	48	30	22		M10
					1.89	3.19	1.89	1.18	.87		
32	38	1.50		46	56	89	48	30	24		M10
					2.20	3.50	1.89	1.18	.94		
	42,4	1.69	1-1/4	1.81	56	89	48	30	26,2		M10
					2.20	3.50	1.89	1.18	1.03		
40	44,5	1.76		52	62	100	55	35	27,2		M10
					2.44	3.94	2.17	1.38	1.07		
	48,3	1.90	1-1/2	2.05	62	100	55	35	29		M10
					2.44	3.94	2.17	1.38	1.14		
50	57	2.28		64	76	118	63	39	33,5		M12
					2.99	4.65	2.48	1.54	1.32		
	60,3	2.41	2	2.52	76	118	63	39	35,2		M12
					2.99	4.65	2.48	1.54	1.39		
65	76,1	3.04	2-1/2	82	94	135	77	39	43		M12
				3.23	3.70	5.31	3.03	1.54	1.69		
80	88,9	3.56	3	94	106	152	82	39	54,5		M12
				3.70	4.17	5.98	3.23	1.54	2.15		
100	108	4.32		120	136	190	105	47	64		M16
					5.35	7.48	4.13	1.85	2.52		
	114,3	4.57	4	4.72	136	190	105	47	67		M16
					5.35	7.48	4.13	1.85	2.64		
125	133	5.32		148	164	217	105	47	76,5		M16
					6.46	8.54	4.13	1.85	3.01		
	139,7	5.59	5	5.83	164	217	105	47	80		M16
					6.46	8.54	4.13	1.85	3.15		
150	159	6.36		176	192	247	105	47	91,5		M16
					7.56	9.72	4.13	1.85	3.60		
	168,3	6.73	6	6.93	192	247	105	47	96		M16
					7.56	9.72	4.13	1.85	3.78		
175	193,7	7.75		202	218	273	105	47	109		M16
				7.96	8.58	10.75	4.13	1.85	4.29		
200	216	8.64		228	248	311	125	55	120		M20
					9.76	12.24	4.92	2.17	4.72		
	219,1	8.76	8	8.98	248	311	125	55	121,5		M20
					9.76	12.24	4.92	2.17	4.78		
250	267	10.68		282	303	364	125	55	145,5		M20
					11.93	14.33	4.92	2.17	5.73		
	273	10.92	10	11.10	302	364	125	55	148,5		M20
					11.89	14.33	4.92	2.17	5.85		
300	318	12.72		332	352	418	125	55	174		M20
					13.86	16.46	4.92	2.17	6.85		
	323,9	12.96	12	13.07	352	418	125	55	177		M20
					13.86	16.46	4.92	2.17	6.97		
350	355,6	14.22	14	378	402	475	145	63	193		M24
					15.83	18.70	5.71	2.48	7.60		
	368	14.72		14.88	402	475	145	63	199		M24
					15.83	18.70	5.71	2.48	7.83		
400	406,4	16.26	16	428	452	526	145	63	218		M24
					17.80	20.71	5.71	2.48	8.58		
	419	16.76		16.85	452	526	145	63	224,5		M24
					17.80	20.71	5.71	2.48	8.84		
500	508	20.32	20	530	554	627	145	63	269		M24
					21.81	24.69	5.71	2.48	10.59		
	521	20.84		20.87	554	627	145	63	276		M24
					21.81	24.69	5.71	2.48	10.87		

Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.