


37° - FLARED TUBE CONNECTORS

405001

45° (ADJ) male JIC - SAE 3000 PSI flange

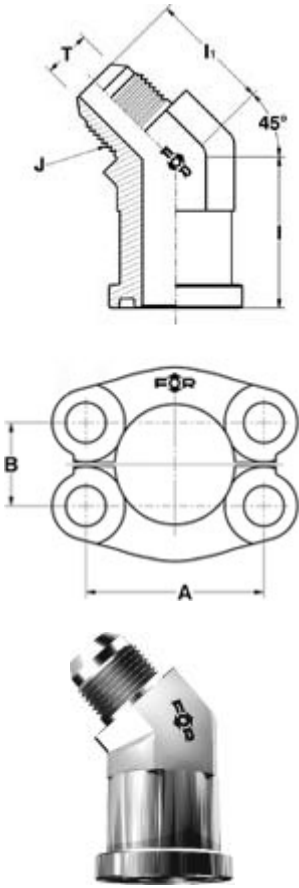

DN	T		RIFERIMENTO REFERENCE	J	I	I ₁	A	B
IN.	MM.	IN.						
1/2	12	1/2	A405001-1212	3/4-16 UNF-2A	37	26	38,10	17,48
1/2	14÷16	5/8	A405001-1216	7/8-14 UNF-2A	37	28	38,10	17,48
3/4	14÷16	5/8	A405001-1916	7/8-14 UNF-2A	42	33	47,63	22,23
3/4	18-20	3/4	A405001-1920	1"1/16-12 UN-2A	42	34	47,63	22,23
3/4	25	1"	A405001-1925	1"5/16-12 UN-2A	42	35	47,63	22,23
1"	18-20	3/4	A405001-2520	1"1/16-12 UN-2A	42	36	52,37	26,19
1"	25	1"	A405001-2525	1"5/16-12 UN-2A	42	37	52,37	26,19
1"	30-32	1"1/4	A405001-2532	1"5/8-12 UN-2A	42	39	52,37	26,19
1"1/4	25	1"	A405001-3225	1"5/16-12 UN-2A	42	37	58,72	30,18
1"1/4	30-32	1"1/4	A405001-3232	1"5/8-12 UN-2A	42	39	58,72	30,18
1"1/2	30-32	1"1/4	A405001-3832	1"5/8-12 UN-2A	50	43	69,85	35,71
1"1/2	38	1"1/2	A405001-3838	1"7/8-12 UN-2A	50	45	69,85	35,71

FOR S.P.A. - NORME E DIMENSIONI SOGGETTE A MODIFICHE SENZA PREAVVISO.
FOR S.P.A. - DESIGN DETAILS AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.