
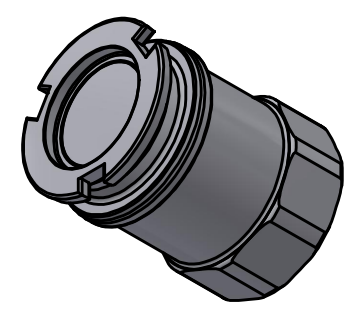
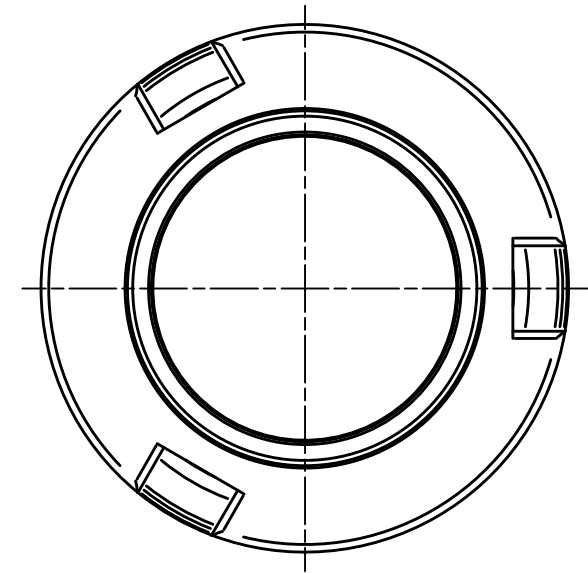


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

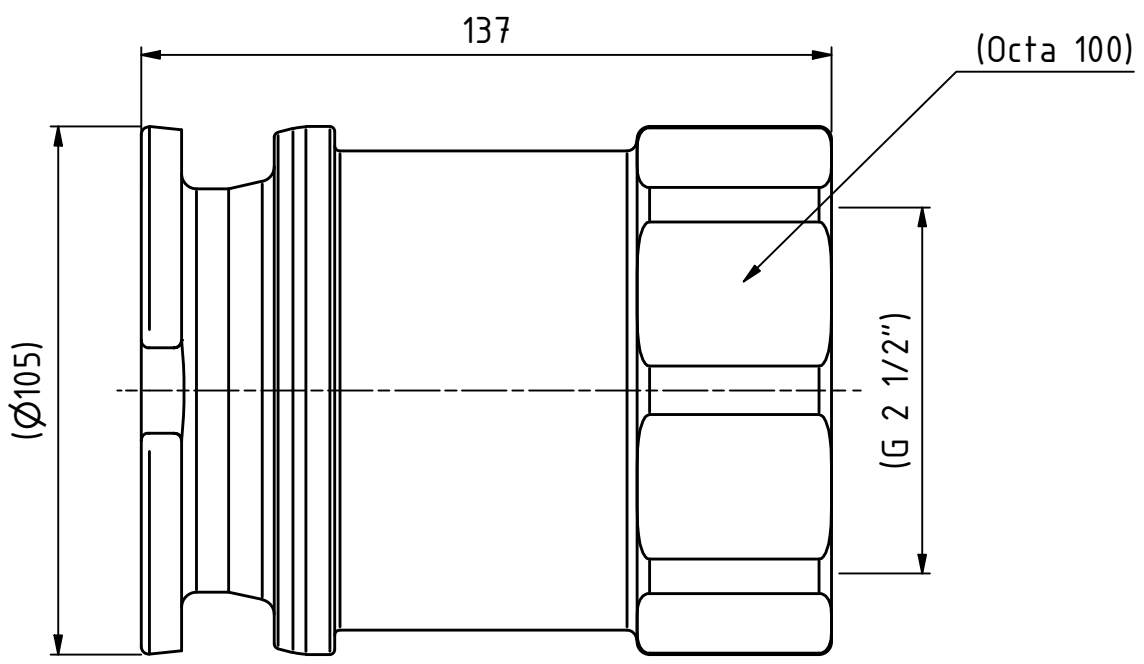

1 : 4

| Product No. 106255001     |                 |
|---------------------------|-----------------|
| Nominal flow Ø DN:        | 65 mm           |
| Socket:                   | 105 mm          |
| Max WP Connected:         | 25 bar          |
| Max WP Disconnected:      | 25 bar          |
| Max Dis/Connect Pressure: | 4 bar           |
| Max Flow (Kerosene 20°C): | 1400 l/min      |
| Temperature range:        | -20°C - +60°C   |
| Connection:               | G 2 1/2" (BSPP) |
| Seal material:            | FKM             |
| Body material:            | Aluminium       |
| Hexagon/Oktagon:          | 100             |
| Configuration Code:       | TCAFZ01         |
| Weight:                   | 1450 g          |

| 1          | 1   | 2 1/2" Tank unit, Aluminium, G 2 1/2", FKM | Aluminium  |
|------------|-----|--------------------------------------------|------------|
| Item       | Qty | Description                                | Material   |
| State      |     | Drawn                                      | Checked    |
| Production |     | CABBW                                      | JOJ        |
|            |     | Approved                                   | Date       |
|            |     | JOER                                       | 2024-03-22 |
|            |     | ECO                                        | Former No. |
|            |     | Scale                                      | 2 : 3      |
|            |     | Drawing No.                                | Issue      |
|            |     | 106255001                                  | A          |
|            |     | Sheet                                      | 1 /(1 )    |