
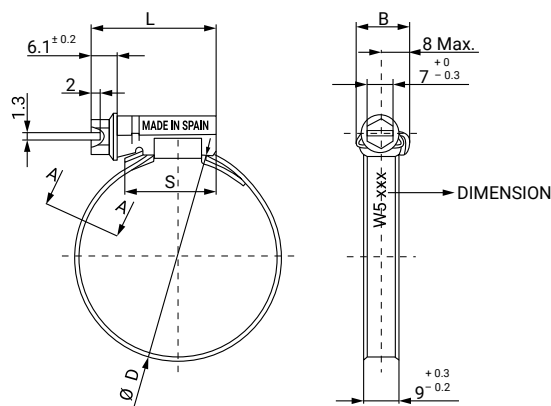




Thanks to the exclusive design of the housing and the high-strength screw, the ASFA L Worm-Drive Clip has excellent performance while being at the same time very compact.

The cold-formed stamped 9 mm band, smoothed on the underside, combined with the bevelled band edges protects the hose from any damage.

DIN 3017. The ASFA LW1 hose clip complies fully with the DIN 3017 norm and also with the directive EU 2002/95/EC.

MATERIAL: Band and support: W5
Stainless steel X5Cr Ni Mo
17.12.2 DIN 1.4401 AISI 316
Bolt: Stainless steel
AISI 316 Cu

CORROSION RESISTANCE: 800 hours salt spray
(ASTM B-117)

Ø Application mm	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
8-12 (*)	03015748	18,5	0,40	9,2	11,5	15,0	15	200	1.600
8-16	03015759	22,1	0,65	10,5	14,0	15,0	45	200	800
12-22	03015767	22,1	0,65	10,5	14,0	15,0	45	200	800
16-27	03015775	23,6	0,75	10,5	14,0	16,5	42	200	800
20-32	03015783	23,6	0,75	10,5	14,0	16,5	36	200	800
25-40	03015804	25,6	0,75	10,5	14,0	17,1	32	100	800
30-45	03015812	25,6	0,75	10,5	14,0	17,1	28	100	800
32-50	03015820	25,6	0,75	10,5	14,0	17,1	24	100	800
40-60	03015839	25,6	0,75	10,5	14,0	17,1	19	100	400
50-70	03015847	29,6	0,75	10,5	14,0	21,1	17	100	100
60-80	03015855	29,6	0,75	10,5	14,0	21,1	15	100	100
70-90	03015863	29,6	0,75	10,5	14,0	21,1	13	50	400
80-100	03015871	29,6	0,75	10,5	14,0	21,1	11	50	400
90-110	03015880	29,6	0,75	10,5	14,0	21,1	10	25	200
100-120	03015898	29,6	0,75	10,5	14,0	21,1	9	25	200
110-130	03015900	29,6	0,75	10,5	14,0	21,1	8	25	25
120-140	03015919	29,6	0,75	10,5	14,0	21,1	7	25	25
130-150	03015927	29,6	0,75	10,5	14,0	21,1	6	25	25
140-160	03015935	29,6	0,75	10,5	14,0	21,1	5	25	25

(*) ASFA-L 7 mm