


PIPE SCREW JOINTS

D MALE STUD RUN TEES

D MALE STUD RUN TEE BSP TAPER

BSP taper.

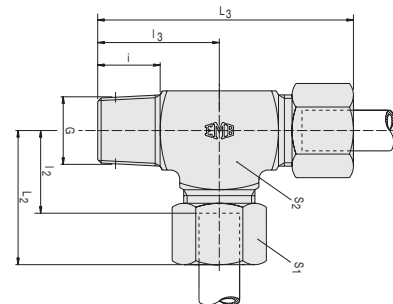

description	pipe OD	PN series	S ₁	S ₂ *	L ₂	l ₂	L ₃	l ₃	i	G	kg % pc
D 4-RLL	4	LL 100 (400)	10	11	21	11.0	38	17	8	R 1/8" K	2.9
D 6-RLL	6	LL 100 (400)	12	11	21	9.5	38	17	8	R 1/8" K	3.5
D 8-RLL	8	LL 100 (400)	14	12	23	11.5	43	20	8	R 1/8" K	4.7
DS-D 6-RL	6	L 315 (1260)	14	12/14	27	12.0	47	20	8	R 1/8" K	6.0
DS-D 8-RL	8	L 315 (1260)	17	14	29	14.0	55	26	12	R 1/4" K	9.1
DS-D 10-RL	10	L 315 (1260)	19	17	30	15.0	57	27	12	R 1/4" K	11.4
DS-D 12-RL	12	L 315 (1260)	22	19	32	17.0	60	28	12	R 3/8" K	16.2
DS-D 15-RL	15	L 315 (1260)	27	19	36	21.0	70	34	14	R 1/2" K	20.0
DS-D 18-RL	18	L 315 (1260)	32	24	40	23.5	76	36	14	R 1/2" K	26.7
DS-D 6-RS	6	S 400 (1600)	17	14	31	16.0	57	26	12	R 1/4" K	10.8
DS-D 8-RS	8	S 400 (1600)	19	17	32	17.0	59	27	12	R 1/4" K	13.8
DS-D 10-RS	10	S 400 (1600)	22	19	34	17.5	62	28	12	R 3/8" K	19.0
DS-D 12-RS	12	S 400 (1600)	24	22	38	21.5	66	28	12	R 3/8" K	24.3
DS-D 14-RS	14	S 400 (1600)	27	19	40	22.0	72	32	14	R 1/2" K	23.4
DS-D 16-RS	16	S 400 (1600)	30	24	43	24.5	75	32	14	R 1/2" K	30.7

L_2+L_3 = approximate length with nut tightened

OD 4 to 12 mm manufactured from profile material

Please see "Engineering and technical data - Selecting the correct tube fitting" for more information on pressure.

* Depending on type of production, the wrench size may vary in some cases