

FMM 150

Working Pressure	200 bar - 2900 psi
Flow rate	156 l/min - 41 gpm
DeltaP max of the project	1 bar - 15 psi
Working Temperature	40 °C - 105 °F
Filtration	A10 - 10 µm absolute inorganic microfibre


Fluid	HLP
Fluid type	ISO VG 32 (SUS 151)
Viscosity	32 Cst - 150 SUS
Max. Working Pressure	420 bar - 6090 psi



SELECTION

Range	Size	Length	ByPass	Seal	Connection	Option1	Filtration	Series
FMM	150	1	B	A	C	1	A10	N
Indicator : T2 - Plug								


Housing ΔP	0.71 bar	10 psi
Element ΔP	1.25 bar	18 psi
Complete filter ΔP	1.96 bar	28 psi

Filter Element type	HP1501A10ANP01
Connections	G 1"
No. of elements in filter housing	1

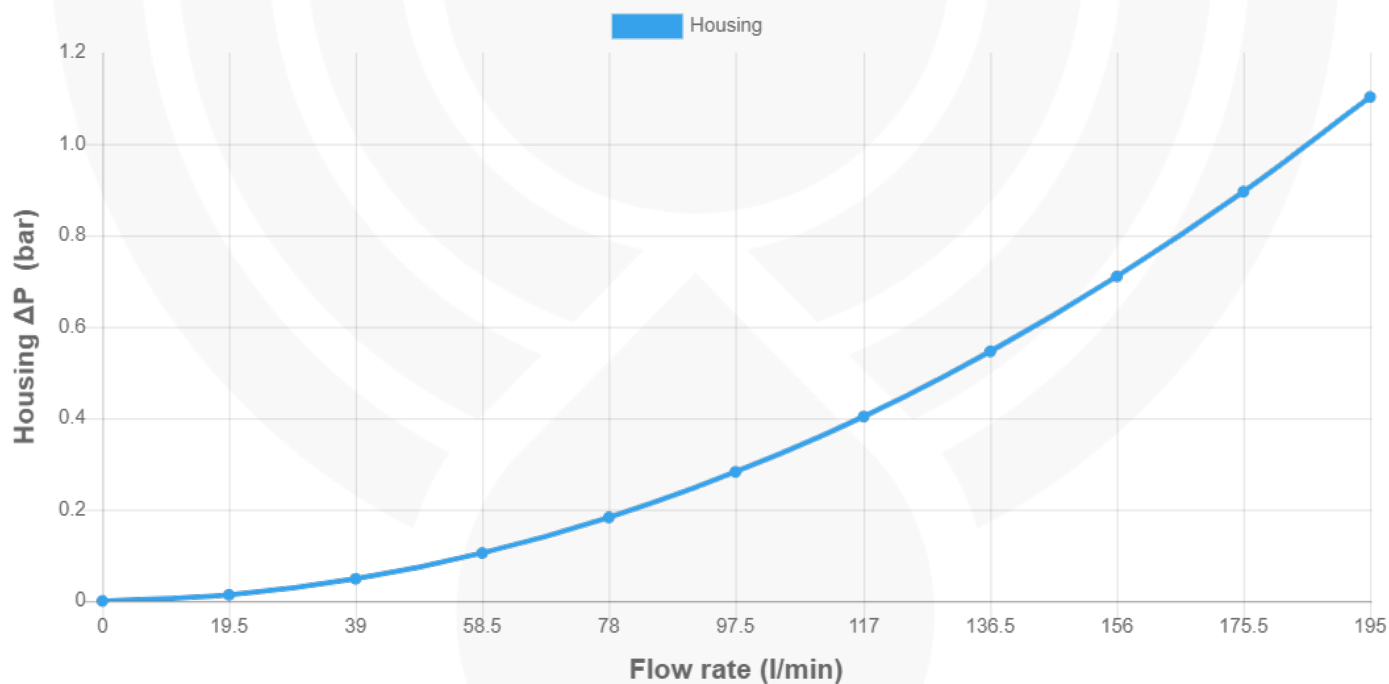

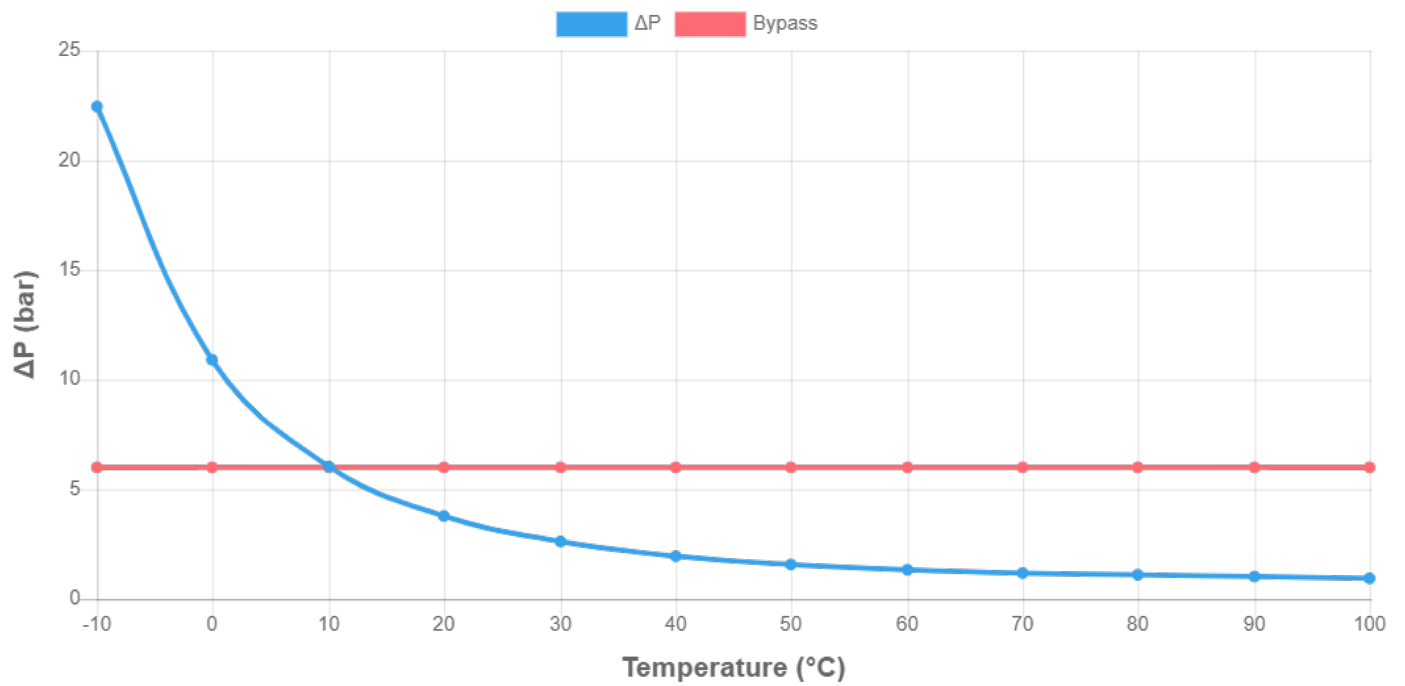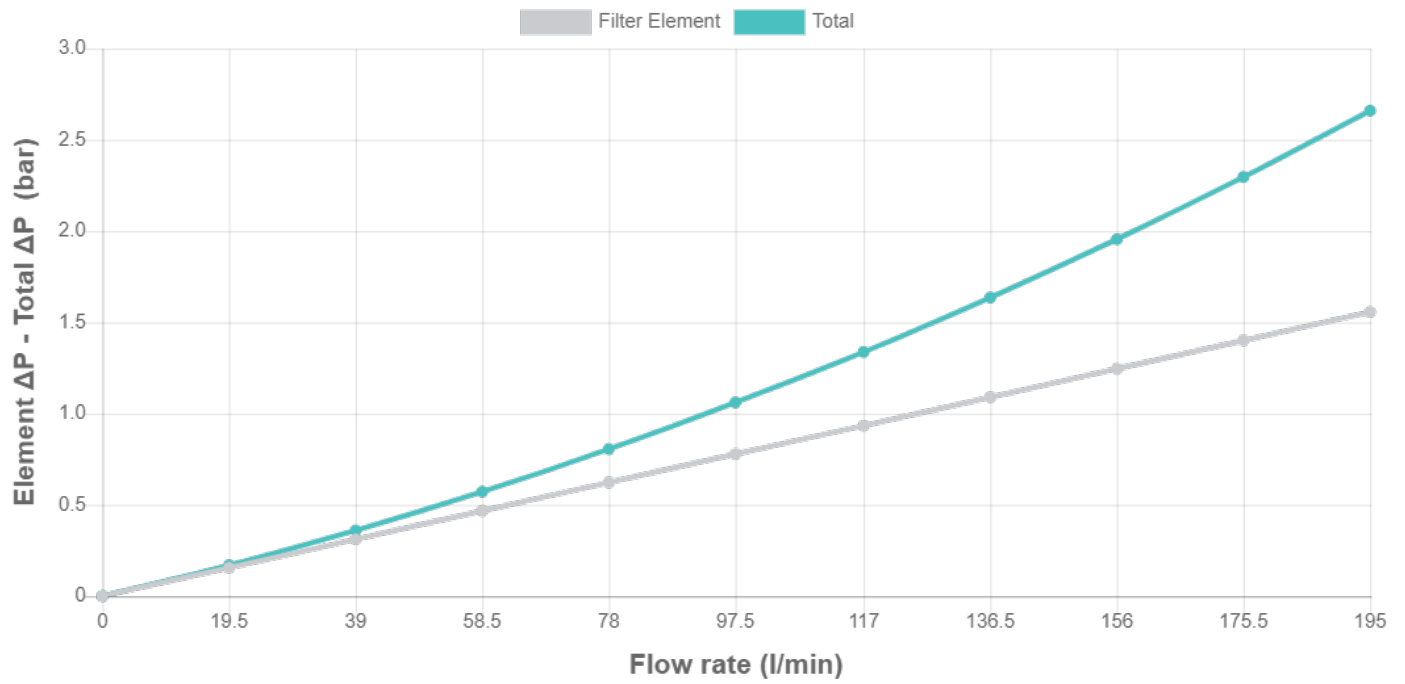

T2	
Indicator plug	
Seal	Ordering code
HNBR	T2 H
FPM	T2 V



Materials

- Body: Phosphatized steel
- Seal: HNBR / FPM

