


SAE 6000 PSI Flare Flange with Threaded Holes, Metric

SAE J518 Code 62 (ISO 6162-2)

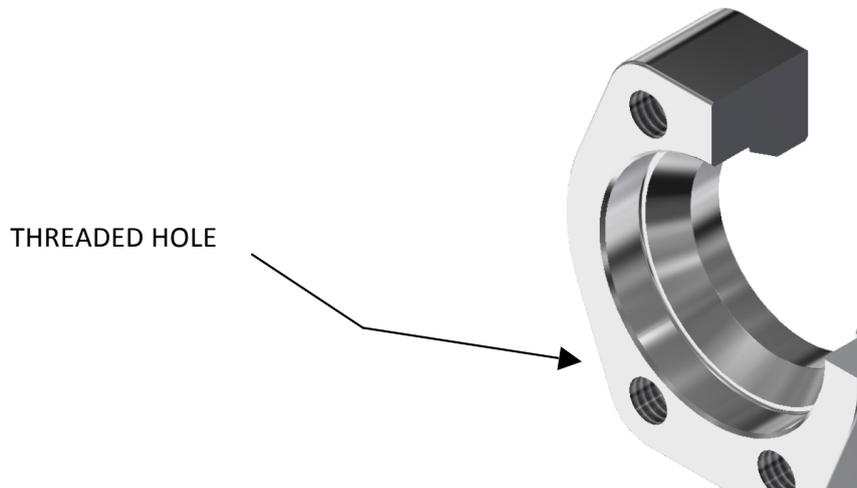

FFTM64 - Flare Flange with Threaded Holes, Metric

Size	Pipe O.D. (mm)	Standard Part Number	Working Pressure PSI (Bar)	Weight lbs (kg)
1/2"	16	FFTM64-050-16MM-*	6000 (420)	0.56 (0.25)
1/2"	18	FFTM64-050-18MM-*	6000 (420)	0.56 (0.25)
1/2"	20	FFTM64-050-20MM-*	6000 (420)	0.56 (0.25)
1/2"	25	FFTM64-050-25MM-*	6000 (420)	0.56 (0.25)
3/4"	20	FFTM64-075-20MM-*	6000 (420)	1.03 (0.47)
3/4"	25	FFTM64-075-25MM-*	6000 (420)	1.03 (0.47)
3/4"	30	FFTM64-075-30MM-*	6000 (420)	1.03 (0.47)
1"	25	FFTM64-100-25MM-*	6000 (420)	1.39 (0.63)
1"	30	FFTM64-100-30MM-*	6000 (420)	1.39 (0.63)
1"	38	FFTM64-100-38MM-*	6000 (420)	1.39 (0.63)
1-1/4"	30	FFTM64-125-30MM-*	6000 (420)	2.09 (0.95)
1-1/4"	38	FFTM64-125-38MM-*	6000 (420)	2.09 (0.95)
1-1/4"	42	FFTM64-125-42MM-*	6000 (420)	2.09 (0.95)
1-1/4" (2)	30	FFTM64-125-M14-30MM-*	6000 (420)	2.09 (0.95)
1-1/4" (2)	38	FFTM64-125-M14-38MM-*	6000 (420)	2.09 (0.95)
1-1/4" (2)	42	FFTM64-125-M14-42MM-*	6000 (420)	2.09 (0.95)
1-1/2"	30	FFTM64-150-30MM-*	6000 (420)	3.85 (1.75)
1-1/2"	38	FFTM64-150-38MM-*	6000 (420)	3.85 (1.75)
1-1/2"	42	FFTM64-150-42MM-*	6000 (420)	3.85 (1.75)
1-1/2"	50	FFTM64-150-50MM-*	6000 (420)	3.85 (1.75)
1-1/2"	56	FFTM64-150-56MM-*	6000 (420)	3.14 (1.43)
2"	50	FFTM64-200-50MM-*	6000 (420)	6.04 (2.75)
2"	60	FFTM64-200-60MM-*	6000 (420)	6.04 (2.75)
2"	66	FFTM64-200-66MM-*	6000 (420)	4.82 (2.19)

*** Materials:**

Standard, No Designation = Carbon Steel, Zinc Nickel Plated.

HDG = Carbon Steel, Hot Dip Galvanized.

SS = Stainless Steel, Type 316.

(2) Designates M14 Bolt – Special Order

Ordering Example: FFTM64-200-50MM-SS

* Insert Material

3D step models available upon request