


Cutting Ring Assembly Stud for Machine-Assisted Assembly

Type FI-MFK ▪ Series LL / L / S

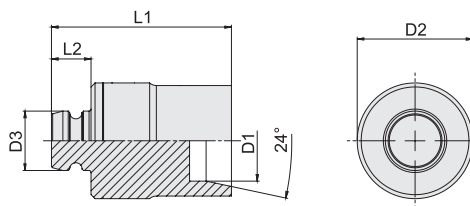

Series	Tube OD mm	Dimensions mm				Weight kg ca. per 100	Ordering Codes
		D1	D2	D3	L1	L2	
LL	4	30	14,8	50	10	12,98	FI-MFK-04LL-W100
	6	30	14,8	50	10	13,28	FI-MFK-06LL-W100
	8	30	14,8	50	10	13,68	FI-MFK-08LL-W100
L	6	30	14,8	50	10	13,57	FI-MFK-06L-W100
	8	30	14,8	50	10	14,01	FI-MFK-08L-W100
	10	30	14,8	50	10	14,63	FI-MFK-10L-W100
	12	30	14,8	50	10	16,09	FI-MFK-12L-W100
	15	30	14,8	50	10	16,63	FI-MFK-15L-W100
	18	30	14,8	50	10	18,23	FI-MFK-18L-W100
	22	30	14,8	49	10	19,13	FI-MFK-22L-W100
	28	33,8	14,8	48	10	24,43	FI-MFK-28L-W100
	35	42,8	14,8	45	10	32,72	FI-MFK-35L-W100
	42	49,8	14,8	44	10	41,17	FI-MFK-42L-W100
	6	30	14,8	50	10	14,14	FI-MFK-06S-W100
S	8	30	14,8	50	10	14,68	FI-MFK-08S-W100
	10	30	14,8	50	10	15,23	FI-MFK-10S-W100
	12	30	14,8	50	10	15,89	FI-MFK-12S-W100
	14	30	14,8	49	10	15,98	FI-MFK-14S-W100
	16	30	14,8	49	10	16,65	FI-MFK-16S-W100
	20	30	14,8	45	10	16,43	FI-MFK-20S-W100
	25	33,8	14,8	42	10	19,02	FI-MFK-25S-W100
	30	39,8	14,8	40	10	22,88	FI-MFK-30S-W100
	38	49,8	14,8	36	10	26,41	FI-MFK-38S-W100

Materials / surface finishings: **W100** Steel, PVD coated

Accessories



Cone Gauges

Page 283