


NPTF MP

Male NPTF pipe.

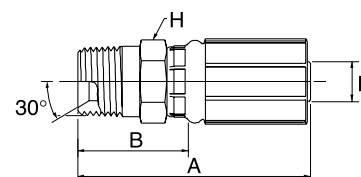

D				A	B	H	REF.
-size	DN	"		mm	mm	mm	G
-4	6	1/4	1/8" - 27 NPTF	50.0	24.0	12.7	4G2MP
-4	6	1/4	1/4" - 18 NPTF	55.0	29.0	14.3	4G4MP
-4	6	1/4	3/8" - 18 NPTF	55.0	29.0	17.5	4G6MP
-4	6	1/4	1/2" - 14 NPTF	62.0	36.0	22.2	4G8MP
-5	8	5/16	1/4" - 18 NPTF	58.0	30.0	15.9	5G4MP
-5	8	5/16	3/8" - 18 NPTF	59.0	31.0	17.5	5G6MP
-6	10	3/8	1/4" - 18 NPTF	59.0	31.1	15.9	6G4MP
-6	10	3/8	3/8" - 18 NPTF	59.0	31.1	17.5	6G6MP
-6	10	3/8	1/2" - 14 NPTF	64.0	36.1	22.2	6G8MP
-8	12	1/2	3/8" - 18 NPTF	69.0	31.5	20.6	8G6MP
-8	12	1/2	1/2" - 14 NPTF	73.0	35.5	22.2	8G8MP
-8	12	1/2	3/4" - 14 NPTF	75.0	37.5	27.0	8G12MP
-10	16	5/8	1/2" - 14 NPTF	75.0	37.5	23.8	10G8MP
-10	16	5/8	3/4" - 14 NPTF	75.0	37.5	27.0	10G12MP
-12	20	3/4	1/2" - 14 NPTF	88.0	37.0	27.0	12G8MP
-12	20	3/4	3/4" - 14 NPTF	88.0	37.0	27.0	12G12MP
-12	20	3/4	1" - 11.5 NPTF	96.0	45.0	34.9	12G16MP
-16	25	1	3/4" - 14 NPTF	100.0	43.2	34.9	16G12MP
-16	25	1	1" - 11.5 NPTF	104.5	47.7	34.9	16G16MP
-20	32	1.1/4	1.1/4" - 11.5 NPTF	113.0	54.0	44.5	20G20MP

Warning: Use only in NPTF connections. Do not use in oil field (API) connections. Blow apart of an oil field connection can result in serious injuries.

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.