

# 5BM5DCPV

## Applications




### Custom-made remote casting solutions for agriculture with integrated cartridges

The cast iron block is equipped with two integrated 1/2" or 3/4" cartridges, in accordance to ISO 7241 part A standard. Push-Pull connection type. Connection and disconnection under pressure allowed, thanks to the lever, specifically designed to ensure depressurization of the internal circuit. Thanks to its special design, it can be connected to the control block remotely, by means of rigid hoses.




### Pressure Drop

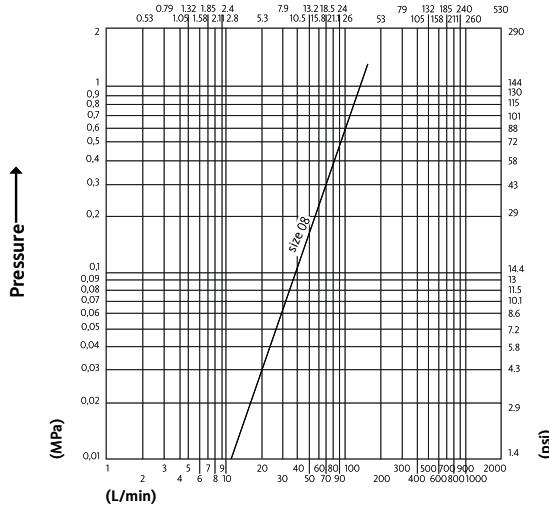

Test performed according to ISO 18869

Cartridges can be easily replaced. Easy to assemble and disassemble without special tools. Each kit contains rear seals and a smalley ring to retain the cartridge into the casting housing.

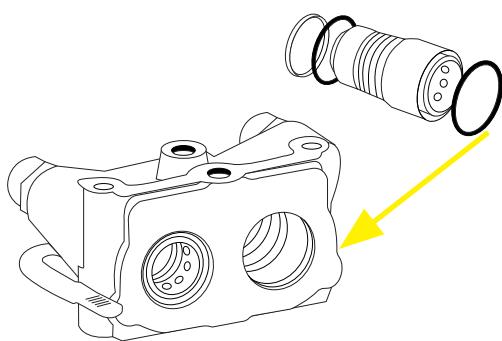

### Replacement cartridge

dash	Size mm	Size inch	Part number
08	12.5	1/2"	KIT 5DCPVA08 A

## Technical Specifications

Material	<b>Cast Iron; Steel</b>
Seals	<b>HNBR; PUR</b>
Working temperatures	<b>- 25 °C to + 125 °C</b>
Surface treatment	<b>MATE 500 (CrIII)</b>
Series Interchange	<b>ISO 7241 part A</b>

Valve Type	<b>Poppet</b>
Connection	<b>Push to Connect or Lever</b>
Disconnection	<b>Lever</b>
Connection Under Pressure	<b>Allowed</b>

