



NO-SKIVE FERRULES

D			A	B	REF.
-size	DN	"	mm	mm	GSP
-24	40	1.1/2	75.8	70.0	24GSP1F-2
-32	50	2	90.0	83.5	32GSP1F-2

Note: Use GSP1F-2 only for wire braid hoses. For 6-spiral wire hose use 1-piece GSM coupling.

BSP FBSPORX


Female BSP 'O' ring swivel. 60° cone.



D				A	B	H	REF.
-size	DN	"		mm	mm	mm	GSP
-24	40	1.1/2	G 1.1/2" - 11 BSP	125.0	51.3	55.0	24GSP24FBSPORX
-32	50	2	G 2" - 11 BSP	153.0	61.0	70.0	32GSP32FBSPORX

BSP FBSPORX45

Female BSP 'O' ring swivel. 60° cone.
45° swept elbow.

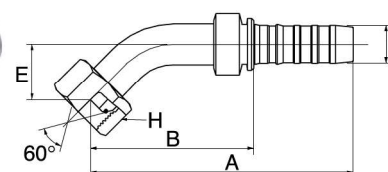

D				A	B	E	H	REF.
-size	DN	"		mm	mm	mm	mm	GSP
-24	40	1.1/2	G 1.1/2" - 11 BSP	214.5	140.9	49.7	55.0	24GSP24FBSPORX45
-32	50	2	G 2" - 11 BSP	276.1	184.1	62.3	70.0	32GSP32FBSPORX45

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.