


# SAE 6000 PSI Block Elbow

SAE J518 Code 62 (ISO 6162-2) Flange Style

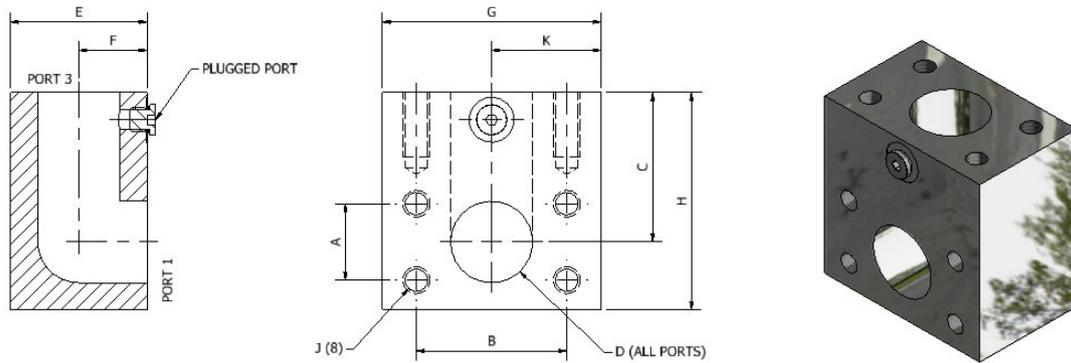

## BE64 - Block Elbow Flat Face with Threaded Holes Complete with #4 SAE Port (Plugged), NPS

Size	Block Elbow Part Number	Dimensions (in)									Thread UNC-2B	WT lbs (kg)	Working Pressure PSI (bar)
		A	B	C	D	E	F	G	H	K			
1/2"	BE64-050-*	0.72	1.59	1.88	0.50	2.00	1.00	2.50	2.50	1.25	5/16"-18	3.10	6000 (420)
3/4"	BE64-075-*	0.94	2.00	2.25	0.75	2.00	1.00	3.00	3.25	1.50	3/8"-16	4.74	6000 (420)
1"	BE64-100-*	1.09	2.25	2.50	0.94	2.25	1.13	3.00	4.00	1.50	7/16"-14	6.42	6000 (420)
1-1/4"	BE64-125-*	1.25	2.63	2.75	1.25	2.50	1.25	4.00	4.00	2.00	1/2"-13	9.18	6000 (420)
1-1/2"	BE64-150-*	1.44	3.13	3.00	1.50	3.00	1.50	4.00	4.50	2.00	5/8"-11	11.66	6000 (420)
2"	BE64-200-*	1.75	3.81	3.38	1.94	3.00	1.50	5.00	5.00	2.50	3/4"-10	14.97	6000 (420)

## BEM64 - Block Elbow Flat Face with Threaded Holes Complete with G1/8 Port (Plugged), Metric

Size	Block Elbow Part Number	Dimensions (mm)									Thread	WT lbs (kg)	Working Pressure PSI (bar)
		A	B	C	D	E	F	G	H	K			
1/2"	BEM64-050-*	18.3	40.4	47.8	12.7	50.8	25.4	63.5	63.5	31.8	M8 x 1.25	1.41	6000 (420)
3/4"	BEM64-075-*	23.9	50.8	57.2	19.1	50.8	25.4	76.2	82.6	38.1	M10 x 1.50	2.15	6000 (420)
1"	BEM64-100-*	27.7	57.2	63.5	23.9	57.2	28.7	76.2	101.6	38.1	M12 x 1.75	2.92	6000 (420)
1-1/4"	BEM64-125-*	31.8	66.8	69.9	31.8	63.5	31.8	101.6	101.6	50.8	M12 x 1.75	4.17	6000 (420)
1-1/4" <sup>(2)</sup>	BEM64-125-M14-*	31.8	66.8	69.9	31.8	63.5	31.8	101.6	101.6	50.8	M14 x 2.00	4.17	6000 (420)
1-1/2"	BEM64-150-*	36.6	79.5	76.2	38.1	76.2	38.1	101.6	114.3	50.8	M16 x 2.00	5.30	6000 (420)
2"	BEM64-200-*	44.5	96.8	85.9	49.3	76.2	38.1	127.0	127.0	63.5	M20 x 2.50	6.80	6000 (420)

**Materials:**

Standard, No Designation = All Carbon Steel, Zinc Nickel Plated.  
 SS = Stainless Steel, Type 316.

Ordering Example: BE64-200-SS

\* Insert Material