


Double acting cylinder

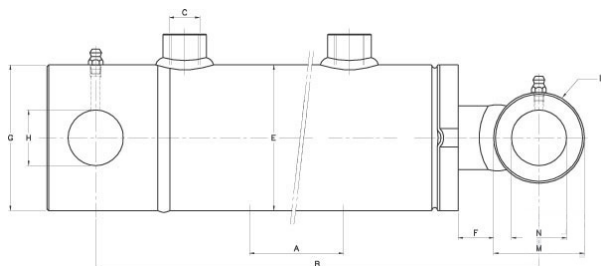

Part Number	Rod Ø (mm)	Bore Ø (mm)	Stroke A (mm)	B (mm)	C (BSP)	ØD (mm)	ØE (mm)	ØF H12 (mm)	G (mm)	H (mm)	L (mm)
D163250ST	16	32	50	184	1/4"	42	40	15,2	12,5	28	30
D1632100ST	16	32	100	234	1/4"	42	40	15,2	12,5	28	30
D1632150ST	16	32	150	284	1/4"	42	40	15,2	12,5	28	30
D1632200ST	16	32	200	334	1/4"	42	40	15,2	12,5	28	30
D2540100ST	25	40	100	246	1/4"	50	49	20,4	15	36	35
D2540200ST	25	40	200	346	1/4"	50	49	20,4	15	36	35
D2540250ST	25	40	250	396	1/4"	50	49	20,4	15	36	35
D2540300ST	25	40	300	446	1/4"	50	49	20,4	15	36	35
D2540400ST	25	40	400	546	1/4"	50	49	20,4	15	36	35
D2540500ST	25	40	500	646	1/4"	50	49	20,4	15	36	35
D3050200ST	30	50	200	373	3/8"	60	59	25,4	19,5	42	45
D3050250ST	30	50	250	423	3/8"	60	59	25,4	19,5	42	45
D3050300ST	30	50	300	473	3/8"	60	59	25,4	19,5	42	45
D3050350ST	30	50	350	523	3/8"	60	59	25,4	19,5	42	45
D3050400ST	30	50	400	573	3/8"	60	59	25,4	19,5	42	45
D3050500ST	30	50	500	673	3/8"	60	59	25,4	19,5	42	45
D3050600ST	30	50	600	773	3/8"	60	59	25,4	19,5	42	45
D3050700ST	30	50	700	873	3/8"	60	59	25,4	19,5	42	45
D3050900ST	30	50	900	1073	3/8"	60	59	25,4	19,5	42	45
D3060200ST	30	60	200	373	3/8"	70	69	25,4	12,5	42	45
D3060250ST	30	60	250	423	3/8"	70	69	25,4	12,5	42	45
D3060300ST	30	60	300	473	3/8"	70	69	25,4	12,5	42	45
D3060400ST	30	60	400	573	3/8"	70	69	25,4	12,5	42	45
D3060500ST	30	60	500	673	3/8"	70	69	25,4	12,5	42	45
D3060600ST	30	60	600	773	3/8"	70	69	25,4	12,5	42	45
D3060700ST	30	60	700	873	3/8"	70	69	25,4	12,5	42	45
D30601000ST	30	60	1000	1173	3/8"	70	69	25,4	12,5	42	45

D-ST

Double acting cylinder with mounting type ST
Pressure max.: 250 bar

Material

- Cylinder St52,H10
- Piston rod: 20MnV6, chrome Ra 0,20
- Cap nut: Cast iron
- Ports: Steel

Construction

Welded cylinder.
Cap nut and piston each made in one piece.
Secured with Loctite or mechanically locked.

Dobbeltvirkende cylinder

Part Number	Rod Ø (mm)	Bore Ø (mm)	Stroke A (mm)	B (mm)	C (BSP)	ØD (mm)	ØE (mm)	ØF H12 (mm)	G (mm)	H (mm)	L (mm)
D3560200ST	35	60	200	373	3/8"	70	69	25,4	12,5	42	45
D3560250ST	35	60	250	423	3/8"	70	69	25,4	12,5	42	45
D3560300ST	35	60	300	473	3/8"	70	69	25,4	12,5	42	45
D3560400ST	35	60	400	573	3/8"	70	69	25,4	12,5	42	45
D3560500ST	35	60	500	673	3/8"	70	69	25,4	12,5	42	45
D3560600ST	35	60	600	773	3/8"	70	69	25,4	12,5	42	45
D3560700ST	35	60	700	873	3/8"	70	69	25,4	12,5	42	45
D35601000ST	35	60	1000	1173	3/8"	70	69	25,4	12,5	42	45
D3570200ST	35	70	200	396	3/8"	80	80	30,4	19,5	50	60
D3570250ST	35	70	250	446	3/8"	80	80	30,4	19,5	50	60
D3570300ST	35	70	300	496	3/8"	80	80	30,4	19,5	50	60
D3570400ST	35	70	400	596	3/8"	80	80	30,4	19,5	50	60
D3570500ST	35	70	500	696	3/8"	80	80	30,4	19,5	50	60
D3570600ST	35	70	600	796	3/8"	80	80	30,4	19,5	50	60
D4080250ST	40	80	250	455	3/8"	90	90	30,4	15,5	50	60
D4080300ST	40	80	300	505	3/8"	90	90	30,4	15,5	50	60
D4080400ST	40	80	400	605	3/8"	90	90	30,4	15,5	50	60
D4080500ST	40	80	500	705	3/8"	90	90	30,4	15,5	50	60
D4080600ST	40	80	600	805	3/8"	90	90	30,4	15,5	50	60
D4080700ST	40	80	700	905	3/8"	90	90	30,4	15,5	50	60
D4080800ST	40	80	800	1005	3/8"	90	90	30,4	15,5	50	60
D4570300ST	45	70	300	496	3/8"	80	80	30,4	19,5	50	60
D4570400ST	45	70	400	596	3/8"	80	80	30,4	19,5	50	60
D4570500ST	45	70	500	696	3/8"	80	80	30,4	19,5	50	60
D4570700ST	45	70	700	896	3/8"	80	80	30,4	19,5	50	60
D5080300ST	50	80	300	505	3/8"	90	90	30,4	15,5	50	60
D5080400ST	50	80	400	605	3/8"	90	90	30,4	15,5	50	60
D5080500ST	50	80	500	705	3/8"	90	90	30,4	15,5	50	60
D5080600ST	50	80	600	805	3/8"	90	90	30,4	15,5	50	60
D5080700ST	50	80	700	905	3/8"	90	90	30,4	15,5	50	60
D5080900ST	50	80	900	1005	3/8"	90	90	30,4	15,5	50	60
D50801000ST	50	80	1000	1105	3/8"	90	90	30,4	15,5	50	60
D60100200ST	60	100	200	436	1/2"	115	115	40,4	15	70	70
D60100400ST	60	100	400	636	1/2"	115	115	40,4	15	70	70
D60100600ST	60	100	600	836	1/2"	115	115	40,4	15	70	70
D60100800ST	60	100	800	1036	1/2"	115	115	40,4	15	70	70
D601001000ST	60	100	1000	1236	1/2"	115	115	40,4	15	70	70