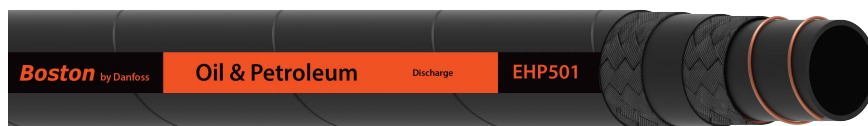


Discharge

EHP501

Oil & Petroleum
Discharge

Application

- For discharge of petroleum products

For use with petroleum products with aromatic content up to 50%

Markets

- Petroleum industry
- Paper/pulp industry
- Oil and gas exploration
- Ship building
- Tank trucks
- Waste hauling

Construction

Tube NBR rubber blend

Reinforcement

High-tensile synthetic textile and dual anti-static copper wire

Cover NBR rubber blend

Colors Black

Operating temperature

-35°C to +70°C
(-31°F to +158°F)

Packaging

61 m
Coil on Pallet

Order Fulfillment

Made to Order

Number	Hose I.D.		Hose O.D.		Operating Pressure		Min. Burst Pressure		Weight		Length
	mm	in	mm	in	bar	psi	bar	psi	kg/m	lbs/ft	
EHP501-16	25.4	1.00	35	1.38	10.0	145	30.0	435	0.57	0.38	61
EHP501-20	32.0	1.25	42	1.65	10.0	145	30.0	435	0.72	0.48	61
EHP501-24	38.0	1.50	48	1.89	10.0	145	30.0	435	0.86	0.58	61
EHP501-28	44.5	1.75	55	2.17	10.0	145	30.0	435	1.06	0.71	61
EHP501-32	50.8	2.00	62	2.44	10.0	145	30.0	435	1.28	0.86	61
EHP501-40	63.5	2.50	75	2.95	10.0	145	30.0	435	1.63	1.10	61
EHP501-48	76.2	3.00	88	3.46	10.0	145	30.0	435	1.98	1.33	61
EHP501-56	90.0	3.50	104	4.09	10.0	145	30.0	435	2.72	1.53	61
EHP501-64	101.6	4.00	116	4.57	10.0	145	30.0	435	3.19	2.14	61
EHP501-80	127.0	5.00	143	5.63	10.0	145	30.0	435	4.46	3.00	61
EHP501-96	152.4	6.00	168	6.61	10.0	145	30.0	435	5.25	3.53	61

Type of couplings

- Cam and groove
- Combination nipple

Contact coupling manufacturer for attachment procedure and other coupling recommendations