


ACCESSORIES FOR ISO 15552 STD, TYPE A, SERIES 3, TWO-FLAT:



FIXINGS

FOOT - MODEL A

+ = ADD THE STROKE

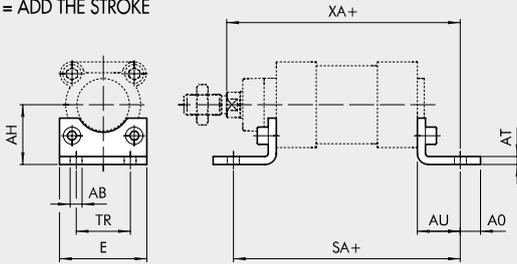


Code	Ø	Ø AB	AH	AO	AT	AU	TR	E	XA	SA	Weight [g]
W0950322001	32	7	32	11	4	24	32	45	144	142	76
W0950402001	40	9	36	15	4	28	36	52	163	161	100
W0950502001	50	9	45	15	5	32	45	65	175	170	162
W0950632001	63	9	50	15	5	32	50	75	190	185	266
W0950802001	80	12	63	20	6	41	63	95	215	210	456
W0951002001	100	14	71	25	6	41	75	115	230	220	572
W0951252001	125	16	90	15	8	45	90	140	270	250	1130

Note: Individually packed with 2 screws

FEMALE HINGE - MODEL B

+ = ADD THE STROKE

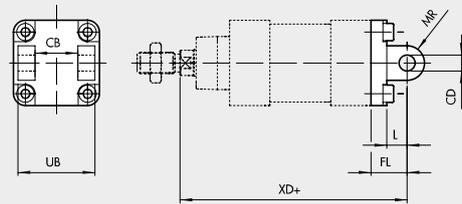


Code	Ø	UB	CB ^{H14}	FL	CD ^{H9}	XD	MR	L	Weight [g]
W0950322003	32	45	26	22	10	142	10	12	116
W0950402003	40	52	28	25	12	160	12	15	160
W0950502003	50	60	32	27	12	170	12	15	252
W0950632003	63	70	40	32	16	190	16	20	394
W0950802003	80	90	50	36	16	210	16	20	670
W0951002003	100	110	60	41	20	230	20	25	1085
W0951252003	125	130	70	50	25	275	25	30	2000

Note: Supplied with 4 screws, 4 washers, 2 snap-rings, 1 pin

MALE HINGE - MODEL BA

+ = ADD THE STROKE

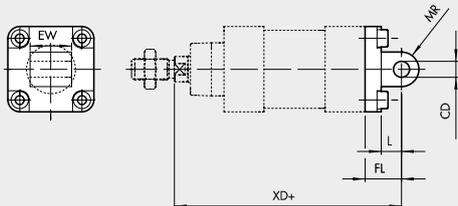


Code	Ø	EW	FL	MR	CD ^{H9}	L	XD	Weight [g]
W0950322004	32	26	22	10	10	13	142	94
W0950402004	40	28	25	12	12	16	160	124
W0950502004	50	32	27	12	12	16	170	220
W0950632004	63	40	32	16	16	22	190	316
W0950802004	80	50	36	16	16	22	210	578
W0951002004	100	60	41	20	20	27	230	850
W0951252004	125	70	50	25	25	30	275	1590

Note: Supplied with 4 screws

ARTICULATED MALE HINGE - MODEL BAS


+ = ADD THE STROKE

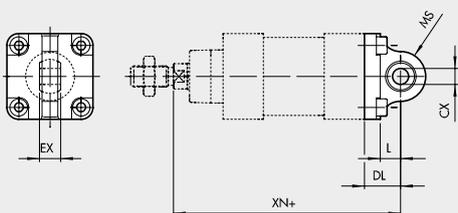

Code	Ø	DL	MS	L	XN	CX ^{H9}	EX	Weight [g]
W0950322006	32	22	16	12	142	10	14	106
W0950402006	40	25	18	15	160	12	16	142
W0950502006	50	27	21	15	170	12	16	236
W0950632006	63	32	23	20	190	16	21	336
W0950802006	80	36	28	20	210	16	21	572
W0951002006	100	41	30	25	230	20	25	840
W0951252006	125	50	40	30	275	25	31	1520

Note: Supplied with 4 screws


CETOP HINGE FOR MODEL B - MODEL GL

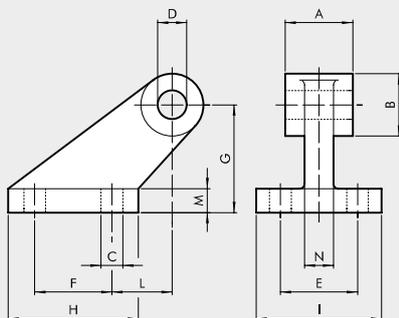

Code	Ø	A	B	C	D	E	F	G	H	I	L	M	N	Weight [g]
W0950322008	32	26	19	7	10	25	20	32	37	41	18	8	10	96
W0950402008	40	28	26	9	12	32	32	45	54	52	25	10	12	216
W0950502008	50	32	26	9	12	32	32	45	54	52	25	10	12	212
W0950632008	63	40	33	11	16	40	50	63	75	63	32	12	15	440
W0950802008	80	50	33	11	16	40	50	63	75	63	32	12	15	464
W0951002008	100	60	44	14	20	50	70	90	103	80	40	16	22	985
W0951252008	125	70	44	14	25	50	70	90	103	80	40	16	22	1000

Note: Supplied with 4 screws, 4 washers


COUNTER-HINGE FOR MODEL B - MODEL GS

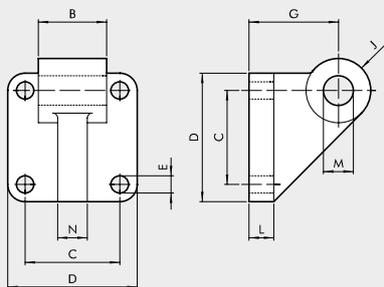

Code	Ø	B	C	D	E	G	J	L	M	N	Weight [g]
W0950322108	32	26	32.5	45	7	32	11	10	10	10	106
W0950402108	40	28	38	52	7	36	13	10	12	12	138
W0950502108	50	32	46.5	65	9	45	13	12	12	12	252
W0950632108	63	40	56.5	75	9	50	17	12	16	15	350
W0950802108	80	50	72	95	11	63	17	16	16	15	655
W0951002108	100	60	89	115	11	73	21	16	20	22	980

Note: Supplied with 4 screws, 4 washers


ISO 15552 COUNTER-HINGE FOR MODEL B - MODEL AB7



Code	Ø	EM	B	ØHB	ØCK	TE	RA	PH	UR	UL	L	BT	EA	P	Q	Weight [g]
W0950322017	32	26	20	6.6	10	38	18	32	31	51	3	8	10	21	3	60
W0950402017	40	28	22	6.6	12	41	22	36	35	54	2	10	15*	21	3	85
W0950502017	50	32	26	9	12	50	30	45	45	65	3	12	16	21	3	162
W0950632017	63	40	30	9	16	52	35	50	50	67	2	14*	16	21	3	191
W0950802017	80	50	30	11	16	66	40	63	60	86	7	14	20	21	3	332
W0951002017	100	60	38	11	20	76	50	71	70	96	5	17*	20	11	3	522
W0951252017	125	70	45	14	25	94	60	90	90	124	10	20	30	21	3	960

* Dimensions not to ISO 15552

FRONT FLANGE - MODEL C

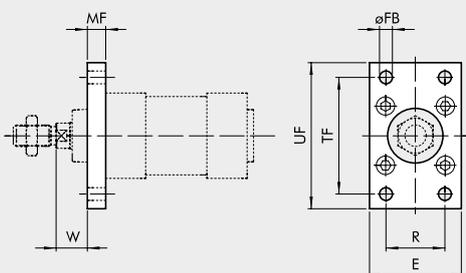


Code	Ø	TF	UF	E	MF	R	øFB	W	Weight [g]
W0950322002	32	64	80	50	10	32	7	16	246
W0950402002	40	72	90	55	10	36	9	20	290
W0950502002	50	90	110	65	12	45	9	25	522
W0950632002	63	100	120	75	12	50	9	25	670
W0950802002	80	126	150	95	15	63	12	30	1420
W0951002002	100	150	178	115	15	75	14	35	2040
W0951252002	125	180	220	140	20	90	16	45	4300

Note: Supplied with 4 screws

REAR FLANGE - MODEL C


+ = ADD THE STROKE

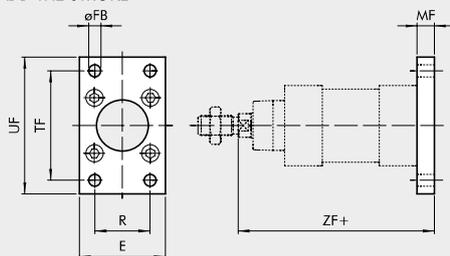

Code	Ø	TF	UF	E	MF	R	øFB	ZF	Weight [g]
W0950322002	32	64	80	50	10	32	7	130	246
W0950402002	40	72	90	55	10	36	9	145	290
W0950502002	50	90	110	65	12	45	9	155	522
W0950632002	63	100	120	75	12	50	9	170	670
W0950802002	80	126	150	95	15	63	12	190	1420
W0951002002	100	150	178	115	15	75	14	205	2040
W0951252002	125	180	220	140	20	90	16	245	4300

Note: Supplied with 4 screws.


ROD NUT - MODEL S



Code	Ø	F	H	CH	Weight [g]
0950322010	32	M10x1.25	6	17	6
0950402010	40	M12x1.25	7	19	12
0950502010	50/63	M16x1.5	8	24	20
0950802010	80/100	M20x1.5	9	30	32
0951252010	125	M27x2	12	41	74

Note: Individually packed


FORK MODEL GK-M



Code	Ø	øM	C	B	A	L	F	D	N	Weight [g]
W0950322020	32	10	20	10	20	52	40	M10x1.25	26	92
W0950402020	40	12	24	12	24	62	48	M12x1.25	32	148
W0950502020	50	16	32	16	32	83	64	M16x1.5	40	340
W0950502020	63	16	32	16	32	83	64	M16x1.5	40	340
W0950802020	80	20	40	20	40	105	80	M20x1.5	48	690
W0950802020	100	20	40	20	40	105	80	M20x1.5	48	690
W0951252020	125	30	54	30	55	148	110	M27x2	65	1835

Note: Ø32÷100 Supplied complete with 1 pin and 1 clip; Ø125 Supplied complete with 1 pin and 2 seeger


ROD EYE - MODEL GA-M

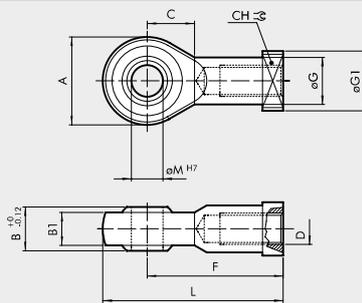

Code	Ø	øM	C	B1	B	A	L	F	D	øG	CH	øG1	Weight [g]
W0950322025	32	10	15	10.5	14	28	57	43	M10x1.25	15	17	19	78
W0950402025	40	12	17	12	16	32	66	50	M12x1.25	17.5	19	19	116
W0950502025	50	16	22	15	21	42	85	64	M16x1.5	22	22	22	226
W0950502025	63	16	22	15	21	42	85	64	M16x1.5	22	22	22	226
W0950802025	80	20	26	18	25	50	102	77	M20x1.5	27.5	30	27	404
W0950802025	100	20	26	18	25	50	102	77	M20x1.5	27.5	30	27	404
W0951252025	125	30	36	25	37	70	145	110	M27x2	40	41	50	1190

Note: Individually packed

SELF ALIGNING ROD COUPLER - MODEL GA-K

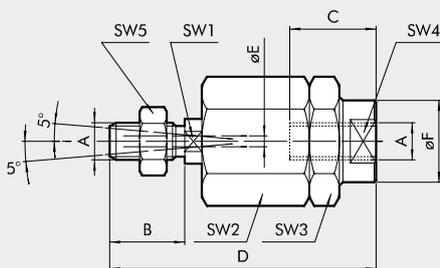

Code	Ø	A	B	C	D	øF	øE	SW ₁	SW ₂	SW ₃	SW ₄	SW ₅	Weight [g]
W0950322030	32	M10x1.25	20	20	71	22	4	12	30	30	19	17	216
W0950402030	40	M12x1.25	24	20	75	22	4	12	30	30	19	19	220
W0950502030	50	M16x1.5	32	32	103	32	4	20	41	41	30	24	620
W0950502030	63	M16x1.5	32	32	103	32	4	20	41	41	30	24	620
W0950802030	80	M20x1.5	40	40	119	32	4	20	41	41	30	30	680
W0950802030	100	M20x1.5	40	40	119	32	4	20	41	41	30	30	680


Note: Individually packed

NOTES

ACCESSORIES FOR ISO 15552 CYLINDERS: INTERMEDIATE HINGE

INTERMEDIATE HINGE - MODEL EN, FOR STD AND STD TWO-FLAT SERIES

+ = ADD THE STROKE
 + 1/2 = ADD HALF THE STROKE

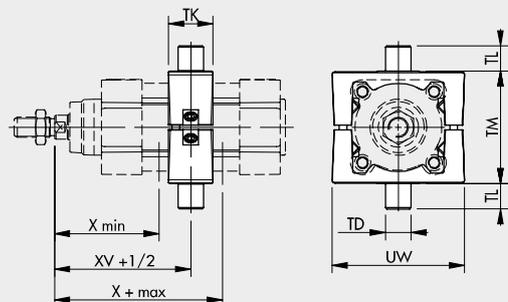


Code	Ø	X _(min)	XV	X _(max)	TM	TL	TD _{e9}	TK	UW	Weight [g]	T [Nm] ♦
0950322007	32	63	73	83	50	12	12	22	65	282	4
0950402007	40	72	82.5	93	63	16	16	28	75	582	10
0950502007	50	83	90	97	75	16	16	32	95	870	15
0950632007	63	86.5	97.5	108.5	90	20	20	35	105	1192	20
0950802007	80	104	110	116	110	20	20	40	130	1950	20
0951002007	100	113.5	120	126.5	132	25	25	45	145	2690	25
0951252007	125	135	145	155	160	25	25	50	175	3927	30

Note: Supplied with 4 grub screws, 2 pins
 ♦ Recommended tightening torque of grub screws

INTERMEDIATE HINGE - MODEL EN, FOR TYPE A AND TYPE A TWO-FLAT SERIES

+ = ADD THE STROKE
 + 1/2 = ADD HALF THE STROKE

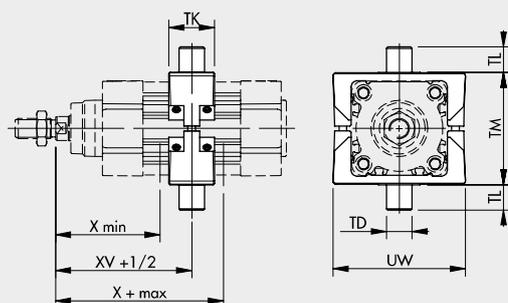


Code	Ø	X _(min)	XV	X _(max)	TM	TL	TD _{e9}	TK	UW	Weight [g]	T [Nm] ♦
0950322107	32	63	73	83	50	12	12	22	65	170	2
0950402107	40	72	82.5	93	63	16	16	28	75	360	5
0950502107	50	83	90	97	75	16	16	28	95	595	6
0950632107	63	86.5	97.5	108.5	90	20	20	36	105	960	10
0950802107	80	104	110	116	110	20	20	36	130	1530	10
0951002107	100	113.5	120	126.5	132	25	25	45	145	2417	20
0951252107	125	135	145	155	160	25	25	50	175	3480	25

Note: Supplied with 8 grub screws, 2 pins
 ♦ Recommended tightening torque of grub screws

INTERMEDIATE HINGE - MODEL EN, FOR SERIES 3 AND TWO-FLAT SERIES 3


+ = ADD THE STROKE
 + 1/2 = ADD HALF THE STROKE

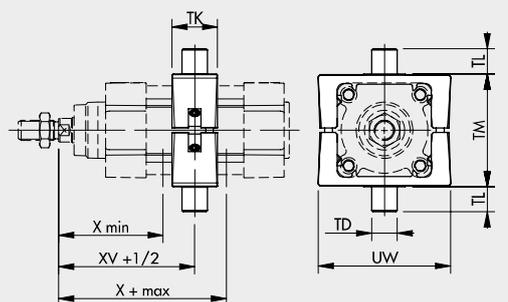

Code	Ø	X _(min)	XV	X _(max)	TM	TL	TD _{e9}	TK	UW	Weight [g]	T [Nm] ♦
0950322207	32	63	73	83	50	12	12	22	65	212	3
0950402207	40	72	82.5	93	63	16	16	28	75	440	8
0950502207	50	83	90	97	75	16	16	28	95	644	15
0950632207	63	86.5	97.5	108.5	90	20	20	36	105	1080	15
0950802207	80	104	110	116	110	20	20	36	130	1654	15
0951002207	100	113.5	120	126.5	132	25	25	45	145	2550	20
0951252207	125	135	145	155	160	25	25	50	175	3726	20

Note: Supplied with 4 grub screws, 2 pins
 ♦ Recommended tightening torque of grub screws

COUNTER-HINGE FOR MODEL EN - MODEL EL



Code	Ø	A	A ₁	B	C	C ₁	D ₁	D ₂	D	E	H	øL	Weight [g]
W0950322009	32	46	32	18	30	15	11	7	12	6.5	10.5	22	162
W0950402009	40	55	36	21	36	18	15	9	16	8.5	12	28	278
W0950402009	50	55	36	21	36	18	15	9	16	8.5	12	28	278
W0950632009	63	65	42	23	40	20	18	11	20	10.5	13	35	414
W0950632009	80	65	42	23	40	20	18	11	20	10.5	13	35	414
W0951002009	100	75	50	28.5	50	25	20	13	25	12.5	16	40	715
W0951002009	125	75	50	28.5	50	25	20	13	25	12.5	16	40	715

Note: 2-pieces pack with 4 screws