




Female Flat-Face O-Ring Swivel - 90° Bent Tube

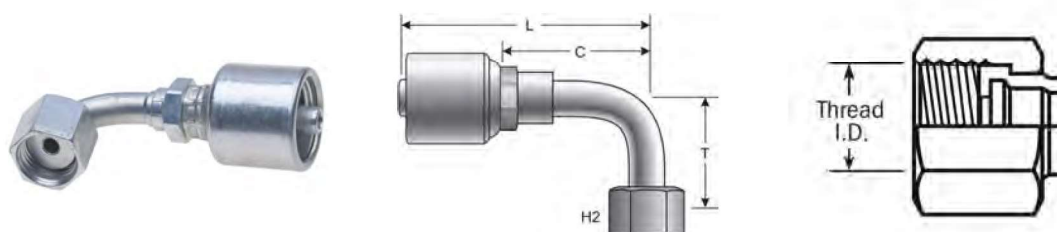

Part No.	Descr.	Prod. No.	⌀			H2	T		L		C	
			"	mm		mm	"	mm	"	mm	"	mm
G25239-0404	4G-4FFORX90S	7104-24045	1/4	6.4	9/16-18	17	0.83	21.0	2.37	60.2	1.35	34.2
G25239-0404T	4G-4FFORX90S-TCX*	7321-50435	1/4	6.4	9/16-18	17	0.83	21.0	2.37	60.2	1.35	34.2
G25240-0404	4G-4FFORX90M	7104-24055	1/4	6.4	9/16-18	17	1.26	32.0	2.21	56.1	1.19	30.2
G25241-0404	4G-4FFORX90L	7104-24065	1/4	6.4	9/16-18	17	1.81	46.0	2.21	56.1	1.19	30.2
G25239-0406	4G-6FFORX90S	7104-24095	1/4	6.4	11/16-16	22.1	0.91	23.1	2.50	63.5	1.47	37.3
G25239-0406T	4G-6FFORX90S-TCX*	7321-50715	1/4	6.4	11/16-16	22.1	0.91	23.1	2.50	63.5	1.47	37.4
G25240-0406	4G-6FFORX90M	7104-24105	1/4	6.4	11/16-16	22.1	1.50	38.1	2.50	63.5	1.47	37.4
G25241-0406	4G-6FFORX90L	7104-24115	1/4	6.4	11/16-16	22.1	2.13	54.1	2.43	61.6	1.40	35.6
G25239-0408	4G-8FFORX90S	7104-24145	1/4	6.4	13/16-16	24.1	1.14	29.0	2.84	72.1	1.81	46.0
G25241-0408	4G-8FFORX90L	7104-24165	1/4	6.4	13/16-16	24.1	2.52	64.0	2.64	67.1	1.62	41.1
G25239-0506	5G-6FFORX90S	7104-24955	5/16	7.9	11/16-16	22.1	0.91	23.1	2.84	72.1	1.73	44.0
G25239-0604	6G-4FFORX90S	7104-24195	3/8	9.5	9/16-18	17	0.83	21.0	2.42	61.4	1.32	33.6
G25239-0606	6G-6FFORX90S	7104-24245	3/8	9.5	11/16-16	22.1	0.91	23.1	2.85	72.5	1.76	44.6
G25239-0606T	6G-6FFORX90S-TCX*	7321-50495	3/8	9.5	11/16-16	22.1	0.91	23.1	2.85	72.5	1.76	44.6
G25240-0606	6G-6FFORX90M	7104-24255	3/8	9.5	11/16-16	22.1	1.50	38.1	2.50	63.5	1.41	35.7
G25241-0606	6G-6FFORX90L	7104-24265	3/8	9.5	11/16-16	22.1	2.13	54.1	2.73	69.3	1.63	41.4
G25239-0608	6G-8FFORX90S	7104-24295	3/8	9.5	13/16-16	24.1	1.14	29.0	2.87	73.0	1.78	45.1
G25239-0608T	6G-8FFORX90S-TCX*	7321-50815	3/8	9.5	13/16-16	24.1	1.14	29.0	2.87	73.0	1.78	45.1
G25240-0608	6G-8FFORX90M	7104-24305	3/8	9.5	13/16-16	24.1	1.61	40.9	2.70	68.6	1.60	40.6
G25241-0608	6G-8FFORX90L	7104-24315	3/8	9.5	13/16-16	24.1	2.52	64.0	2.72	69.1	1.62	41.1
G25239-0810	8G-10FFORX90S	7104-24445	1/2	12.7	1-14	30	1.26	32.0	3.66	93.0	2.18	55.4
G25239-0810T	8G-10FFORX90S-TCX*	7321-50835	1/2	12.7	1-14	30	1.26	32.0	3.66	93.0	2.18	55.4
G25240-0810	8G-10FFORX90M	7104-24455	1/2	12.7	1-14	30	1.85	47.0	3.67	93.2	2.19	55.7
G25241-0810	8G-10FFORX90L	7104-24465	1/2	12.7	1-14	30	2.76	70.1	3.57	90.6	2.09	53.1
G25239-0812	8G-12FFORX90S	7104-24475	1/2	12.7	1 3/16-12	36.1	1.89	48.0	4.05	102.9	2.58	65.4
G25239-0806	8G-6FFORX90S	7104-24345	1/2	12.7	11/16-16	22.1	0.91	23.1	3.29	83.5	1.81	46.0
G25239-0808	8G-8FFORX90S	7104-24395	1/2	12.7	13/16-16	24.1	1.14	29.0	3.30	83.8	1.83	46.5
G25239-0808T	8G-8FFORX90S-TCX*	7321-50645	1/2	12.7	13/16-16	24.1	1.14	29.0	3.30	83.8	1.83	46.5
G25240-0808	8G-8FFORX90M	7104-24405	1/2	12.7	13/16-16	24.1	1.61	40.9	3.30	83.8	1.83	46.4
G25241-0808	8G-8FFORX90L	7104-24415	1/2	12.7	13/16-16	24.1	2.52	64.0	3.30	83.8	1.83	46.5
G25239-1008	10G-8FFORX90S	7104-24495	5/8	15.9	13/16-16	24.1	1.14	29.0	3.64	92.4	2.16	54.9
G25239-1008TX	10G-8FFORX90S-TCX XBULK**	7321-5228	5/8	15.9	13/16-16	24.1	1.14	29.0	3.62	91.9	2.16	54.9
G25241-1008	10G-8FFORX90L	7104-24515	5/8	15.9	13/16-16	24.1	2.52	64.0	3.64	92.4	2.16	54.9
G25239-1010	10G-10FFORX90S	7104-24545	5/8	15.9	1-14	30	1.26	32.0	3.64	92.5	2.17	55.1
G25239-1010T	10G-10FFORX90S-TCX*	7321-50725	5/8	15.9	1-14	30	1.26	32.0	3.64	92.5	2.17	55.1
G25240-1010	10G-10FFORX90M	7104-24555	5/8	15.9	1-14	30	1.85	47.0	3.65	92.8	2.18	55.3
G25241-1010	10G-10FFORX90L	7104-24565	5/8	15.9	1-14	30	2.76	70.1	3.55	90.2	2.08	52.7

*TuffCoat Xtreme™ Plating

**Available in Bulk Only

Parts Continued On Next Page

HOSE/CPLG.
SELECTION

EQUIPMENT

HOSE
SPECIFICATIONGLOBAL SPIRAL
COUPLINGSSTAINLESS
STEEL SPIRAL
COUPLINGSMEGACRIMP
COUPLINGSSTAINLESS
STEEL BRAID
COUPLINGSPOWER CRIMP
COUPLINGSFIELD
ATTACHABLE -
TYPE T
COUPLINGSFIELD
ATTACHABLE - C5
COUPLINGSFIELD
ATTACHABLE -
LOCK-ON
COUPLINGSC14 COUPLINGS
& ASSEMBLIESGLP & GL
COUPLINGS

GLX COUPLINGS

PCTS
THERMOPLASTIC
COUPLINGSPOLARSEAL
COUPLINGS
(ACA, ACB, ACC)POWER
STEERING
CPLGS. & TOC
ASSEMBLIES

ADAPTERS

QUICK
DISCONNECT
COUPLERS

BALL VALVES

LIVE SWIVELS

ACCESSORIES

AIR BRAKE
CPLGS. &
ASSEMBLIES

KITS

BRASS