


Banjo Elbow (Medium-Pressure Version)

Type FI-RSWND-...-R-DK ■ Series LL / L / S

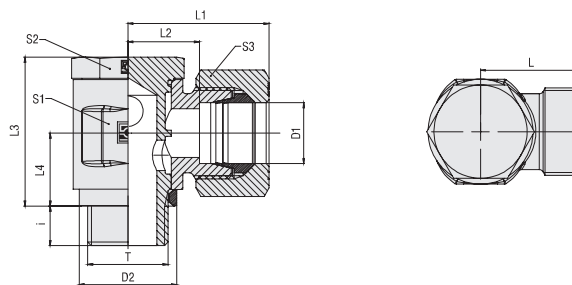

Whitworth Parallel Pipe Thread (BSPP)

External Metallic Sealing Ring

Ordering Codes

***FI-RSWND*-10*L*R*-DK*-W3*-MS**

* Banjo Elbow (Medium-Pressure Version) **FI-RSWND**

* Outside Tube Diameter D1 (in mm) **-10**

* Series Extra-Light Series **LL**
Light Series **L**
Heavy Series **S**

* Thread Type Whitworth Parallel Pipe Thread (BSPP) **R**

If required, please indicate special sizes, e.g. R1/8!

* Seal Type External Metallic Sealing Ring **-DK**

* Material Code Steel, zinc/nickel-plated **-W3**

Please contact STAUFF for alternative materials and surface finishings.

* Assembling / Kitting Fitting body only **—**

Fitting body supplied with cutting ring and union nut **-MS**

Fitting body supplied with soft-sealing cutting ring and union nut **-MSV**

Series	Tube OD mm D1	PB bar	Dimensions													Weight kg ca. per 100	Ordering Codes ³
			mm	Thread	T	D2	i	L	L ¹	L2	L3	L4	S1	S2	S3		
LL	4	100	G 1/8	13	6	15,5	21	11,5	21	10	14	14	10	2,85	FI-RSWND-04LLR-DK-W3		
	6	100	G 1/8	13	6	15,5	21	10	21	10	14	14	12	2,85	FI-RSWND-06LLR-DK-W3		
	8	100	G 1/8	13	6	16,5	23	11	21	10	14	14	14	2,93	FI-RSWND-08LLR-DK-W3		
L	6	250	G 1/8	13	6	18,5	25	11,5	21	10	14	14	14	3,15	FI-RSWND-06LR-DK-W3		
	8	250	G 1/4	17,7	10	20	26	13	26	12	17	19	17	5,85	FI-RSWND-08LR-DK-W3		
	10	250	G 1/4	17,7	9	22	30	15	27	13	19	19	19	6,95	FI-RSWND-10LR-DK-W3		
	10	160	G 3/8	22	9	23	31	16	32	15	22	22	19	10,11	FI-RSWND-10LR3/8-DK-W3		
	12	160	G 1/4	17,7	9	23	30	16	28	13	22	19	22	8,23	FI-RSWND-12LR1/4-DK-W3		
	12	250	G 3/8	22	9	23	31	16	32	15	22	22	22	6,77	FI-RSWND-12LR-DK-W3		
	12	160	G 1/2	26	11	26,5	34	19,5	37,5	18	27	27	22	16,42	FI-RSWND-12LR1/2-DK-W3		
	15	160	G 1/2	26	11	26,5	35	19,5	37,5	18	27	27	27	17,36	FI-RSWND-15LR-DK-W3		
	18	160	G 1/2	26	11	27	36	19,5	44,5	21,5	30	27	32	21,47	FI-RSWND-18LR-DK-W3		
	22	160	G 3/4	32	13	32	41	24,5	49	24	36	32	36	30,63	FI-RSWND-22LR-DK-W3		
	S	6	250	G 1/4	17,7	10	21,5	29	14,5	26	12	17	19	17	6,23	FI-RSWND-06SR-DK-W3	
8		250	G 1/4	17,7	9	23	29	16	27	13	19	19	19	7,47	FI-RSWND-08SR-DK-W3		
10		250	G 3/8	22	9	23,5	32	16	32	15	22	22	22	10,92	FI-RSWND-10SR-DK-W3		
12		250	G 3/8	22	9	26	34	18,5	37	18	24	24	24	14,87	FI-RSWND-12SR-DK-W3		
14		160	G 1/2	26	11	28,5	39	20,5	37,5	18	27	27	27	18,58	FI-RSWND-14SR-DK-W3		
16		160	G 1/2	26	11	30	40	21,5	44,5	21,5	30	27	30	22,48	FI-RSWND-16SR-DK-W3		
20		160	G 3/4	32	13	34	45	23,5	49	24	36	32	36	32,20	FI-RSWND-20SR-DK-W3		

¹ Approximate dimension in assembled condition.

² Weight excluding cutting ring and union nut.

³ Standard scope of delivery: Fitting body only.

Port acc. to DIN 3852-2 (Form X) / ISO 1179-1

Male threaded studs were designed for female threaded ports in components made of steel. For applications with components made of softer mating materials (e.g. Aluminium), the use of connectors with additionally rolled male threads is recommended.

Please contact STAUFF prior to the assembly for further information.

Connecting Parts

	Cutting Ring Type FI-DS	Page 28
	Soft-Sealing Cutting Ring Type FI-WDDS	Page 29
	Support Sleeve Type FI-VH	Page 31
	STAUFF Form EVO Sealing Ring Type FI-FD	Page 32
	Union Nut Type FI-M	Page 33
	37° Flared Tube Fitting Set Type FI-AB	Page 37

Spare Parts / Accessories

	External Metallic Sealing Ring Type FI-DKR	Page 244
---	--	----------