


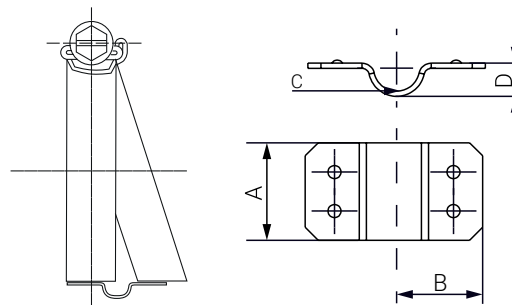

Right-hand bridge

ASFA-L Bridge Clamp with 9 mm bandwidth and manufactured with one or two bridges are an ideal solution for hoses with an outer helix. The geometry and design of the bridges ensure a leaktight fit. These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.

MATERIAL: Stainless Steel
W5 AISI 316

**CORROSION
RESISTANCE:** 1.000 hours Salt Spray
Test ASTM B-117

1 BRIDGE

Part Number	Dimension	Effective Clamping Range		Bridge Dimensions			Box Quantity
		1 Bridge	A	B	C	D	
A1PD3250W5L	32-50	32-46	10	12	3,00	5	100
A1PD4060W5L	40-60	40-56	10	12	3,10	5	100
A1PD5070W5L	50-70	50-66	10	12	3,20	5	100
A1PD6080W5L	60-80	60-76	10	12	3,30	5	100
A1PD7090W5L	70-90	70-86	10	12	3,40	5	50
A1PD80100W5L	80-100	80-96	10	12	3,50	5	50
A1PD90110W5L	90-110	90-106	10	12	3,60	5	25
A1PD100120W5L	100-120	100-116	10	12	3,70	5	25
A1PD110130W5L	110-130	110-126	10	12	3,80	5	25
A1PD120140W5L	120-140	120-136	10	12	3,90	5	25
A1PD130150W5L	130-150	130-146	10	12	3,10	5	25
A1PD140160W5L	140-160	140-156	10	12	3,11	5	25