


TAB. FFH06...M REV. A1 TECHNICAL DATA DEPENDING ON FEMALE COUPLER

FEMALE COUPLING	Max working pressure connected	Min burst pressure connected	Rated flow (#)	Connection effort 0 MPa	Spillage volume each disconnection
FFH06...F	35 MPa	170 MPa	50 L/min	150 N	0.008 cm ³

REV.	CHANGE DOC.	DATE	MODIFIED BY
A	4	11/04/88	ROSSETTI

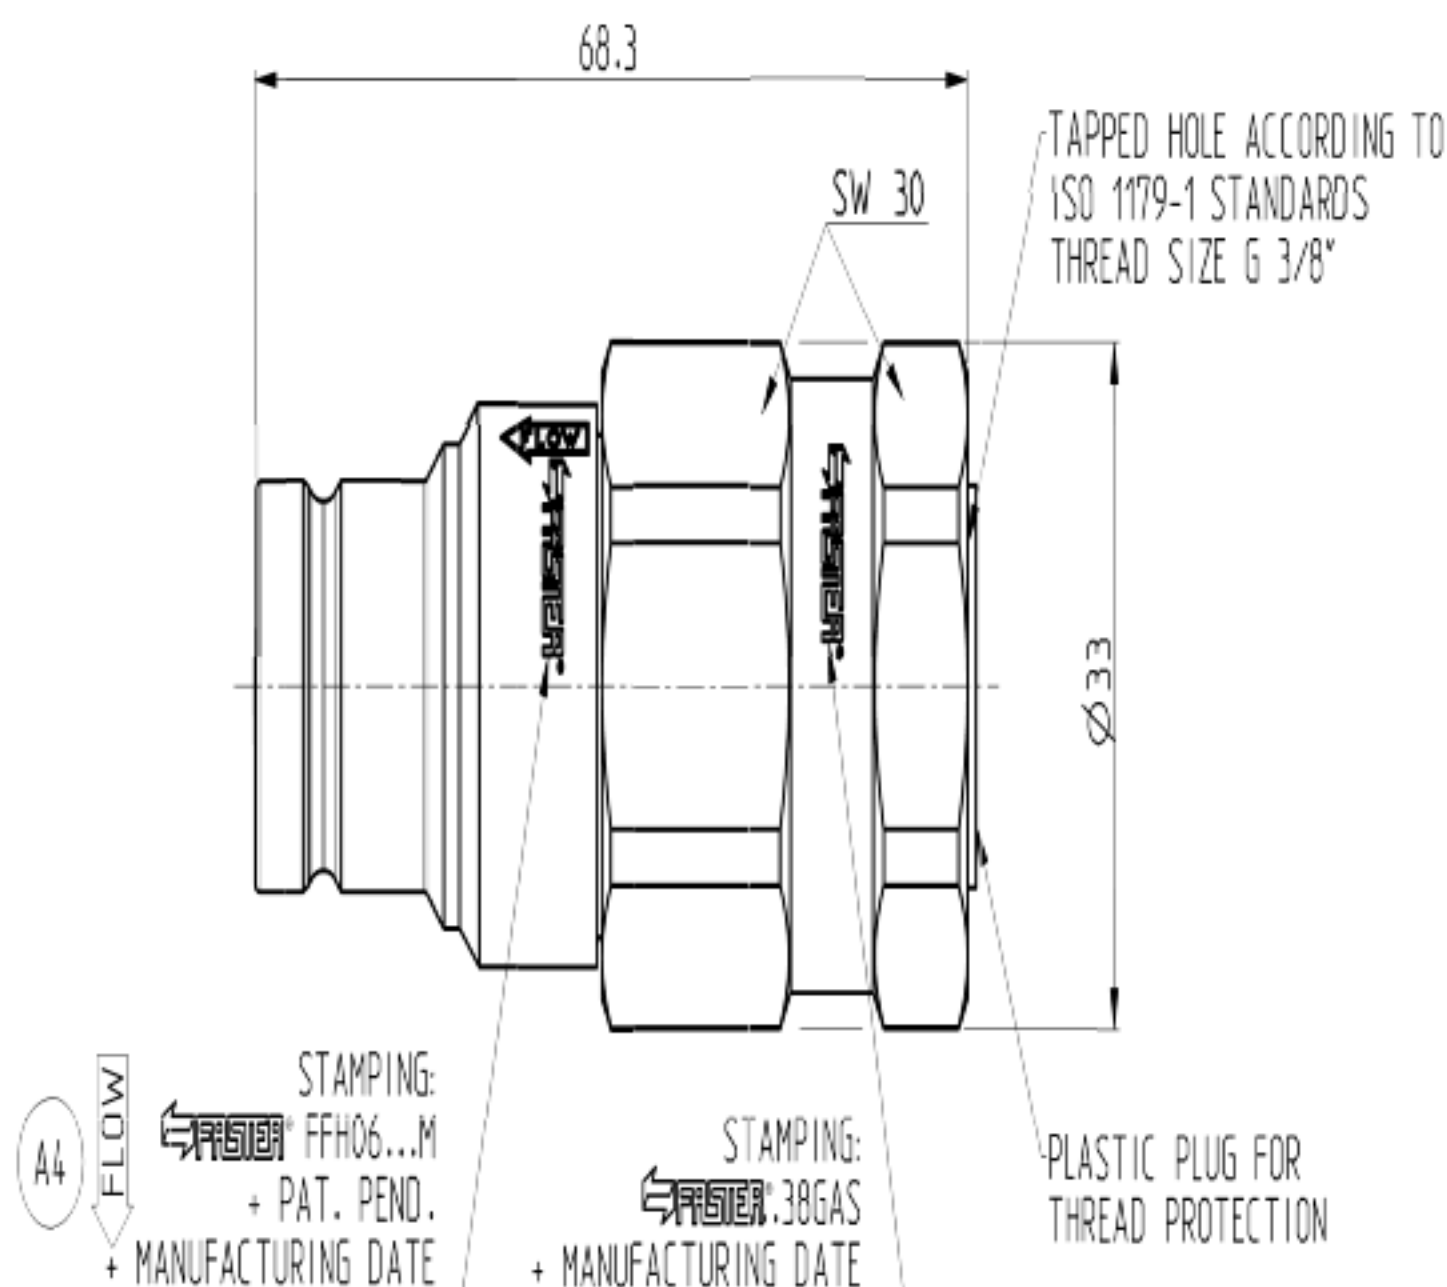

SURFACE TREATMENT: ZINC-NICKEL PLATING

FEATURES FFH06...M REV.B1

Interchangeability according to	ISO 16028 Standards SIZE 10
"Push" connection	OK
Min Burst pressure disconnected	170 MPa
Working temperature	From -25°C To +100°C
Cleanliness according to	MPF 068 Standard: Class "B"
Test methods according to	ISO 7241/2 Standards

(#): $\Delta P=0.2$ MPa at 40°C
Fluid used "ISO VG 32" according to ISO 3448 Standards

FASTER
RIVOLTA D'ADDA-CR-ITALY

THIS DRAWING IS EXCLUSIVE PROPERTY OF FASTER S.p.A.
ANY UNAUTHORIZED COPY AND/OR USE ARE STRICTLY PROHIBITED.
WE RESERVE THE RIGHT TO MODIFY PRODUCT SPECIFICATIONS
WITHOUT PRIOR NOTICE.

DRAMA ROSSETTI	GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED) LINEAR DIMENSIONS ± 0.5 ANGULAR DIMENSIONS $\pm 1^\circ$ RADIUS AND CHAMFER ± 0.05 SHARP EDGES NOT DIMENSIONED: RADIUS OR CHAMFER MAX. 0.2		DESCRIPTION
DATE 11/12/2009	MALE COUPLING		
SIZE A3	DIMENSION	SYMBOL	PART NUMBER :
SCALE 2:1	DIM. MILLIMETERS	CRITICAL	FFH06 38GAS M
	IMPORTANT	+	DRAWING N°
	SECONDARY	NO SYMBOL	AD003336
			REVISION
			A 4