


POLARIS®

Gear flow dividers

DISPLACEMENTS

From 2 cm³/rev
To 32,6 cm³/rev

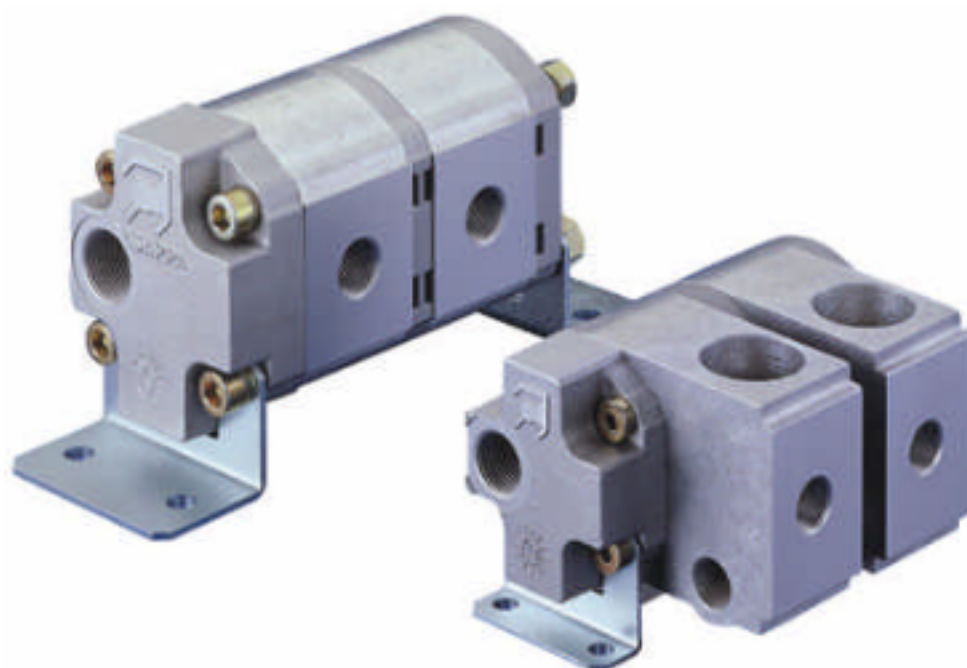

- Modular design
- Accurate division of flow
- Compact overall dimension
- Built-in relief valve

PRESSURE

Max. continuous 250 bar
Max. peak 280 bar

 **CASAPPA®**
FLUID POWER DESIGN