
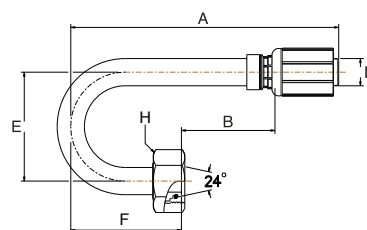



DIN 24° FDLORX180

Female DIN 'O' ring swivel. 24° cone.

Light series. 180° swept elbow.




									
D				A	B	E	F	H	REF.
-size	DN	"		mm	mm	mm	mm	mm	G
-10	16	5/8	M26 x 2.0	157.5	55.0	64.0	65.0	32.0	10G18FDLORX180

DIN 24° MDL

Male DIN parallel. 24° inverted cone.

Light series.



							
D				A	B	H	REF.
-size	DN	"		mm	mm	mm	G
-4	6	1/4	M12 x 1.5	44.0	20.9	14.0	4G6MDL
-4	6	1/4	M14 x 1.5	45.0	21.9	17.0	4G8MDL
-4	6	1/4	M16 x 1.5	45.9	22.8	17.0	4G10MDL
-4	6	1/4	M18 x 1.5	47.0	23.9	19.0	4G12MDL
-5	8	5/16	M14 x 1.5	44.7	20.8	17.0	5G8MDL
-5	8	5/16	M16 x 1.5	45.9	21.8	17.0	5G10MDL
-5	8	5/16	M18 x 1.5	46.7	22.8	19.0	5G12MDL
-6	10	3/8	M16 x 1.5	51.0	23.1	17.0	6G10MDL
-6	10	3/8	M18 x 1.5	52.0	24.1	19.0	6G12MDL
-6	10	3/8	M22 x 1.5	53.0	25.1	24.0	6G15MDL
-8	12	1/2	M18 x 1.5	61.5	24.0	22.0	8G12MDL
-8	12	1/2	M22 x 1.5	62.5	25.0	24.0	8G15MDL
-8	12	1/2	M26 x 1.5	65.5	28.0	27.0	8G18MDL
-10	16	5/8	M26 x 1.5	64.0	26.5	27.0	10G18MDL
-12	20	3/4	M26 x 1.5	78.0	27.0	27.0	12G18MDL
-12	20	3/4	M30 x 2.0	80.0	29.0	32.0	12G22MDL
-16	25	1	M36 x 2.0	76.3	30.4	41.0	16G28MDL
-20	32	1.1/4	M45 x 2.0	80.4	35.1	46.0	20G35MDL

-4 size is 42.0 MPa (6000 psi); -5 & -6 size are 38.5 MPa (5500 psi); -8 size is 35.0 MPa (5000psi); 10 & -12 size are 28.0 MPa (4000 psi);
 -16 size is 22.4 MPa (3200 psi); -20 size is 16.0 MPa (2300 psi).

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.