


FH

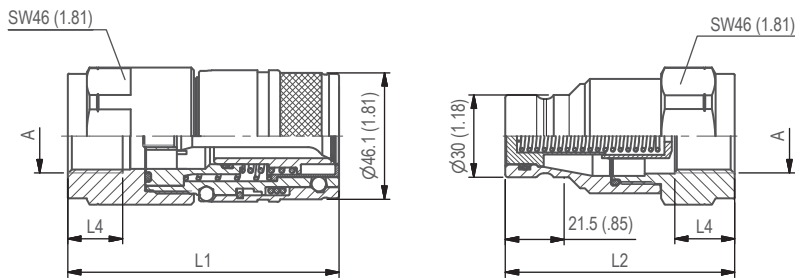

SW: Width across flats. All dimensions in mm (inch).

Series FH-19 ▪ BG 4 ▪ Nominal Size 19

Port A	Dimensions (mm/in)					Female Body Ordering Codes	Weight (kg/lbs) ca. per 100	Male Tip Ordering Codes	Weight (kg/lbs) ca. per 100
	ØD2	L1	L2	L3	L4				
Female Thread according to DIN 3852-2 - ISO 9974-1 - ANSI B 1.20.3									
	G 3/4"	99 3.90	84 3.31		16 .63	QRC-FH-19-F-G12-VT-W5	102,90 226.86	QRC-FH-19-M-G12-VT-W5	57 125.66
	G 1"	99 3.90	84 3.31		18 .71	QRC-FH-19-F-G16-VT-W5	97,20 214.29	QRC-FH-19-M-G16-VT-W5	51,10 112.66
	NPTF 1"-11 1/2	99 3.90	84 3.31			QRC-FH-19-F-NF16-VT-W5	100,40 221.34	QRC-FH-19-M-NF16-VT-W5	54,30 119.71
Male Thread with 24° Conical Bore - Shape W according to DIN 3861									
	M30x2	20S	130 5.12	114,8 4.52	16 .63	QRC-FH-19-F-20S-VT-W5	120 264.55	QRC-FH-19-M-20S-VT-W5	74,10 163.36

Note: The connection of the two halves of a coupling is achieved depending on the type. It is important to observe the positive engagement of push-type couplings and the secure tightening of screw-type couplings to the limit stop of the thread. Forced or improper separation will result in malfunction of the coupling.