

R24

High flow pressure regulator

- Port size:
G1/4 ... G1 1/4
- Exceptionally high flow and relief flow characteristics
- Easy to adjust even at high output pressures
- Balanced valve minimises effect of variations in inlet pressure on outlet pressure
- Relieving feature allows outlet pressure reduction even when the system is dead ended
- Full flow gauge ports
- Panel mounting facility
- Pilot operated version available



Technical features

Medium:
Compressed air

Maximum pressure:
20 bar (290 psi)q

Pressure range:
0,3 ... 17 bar (4 ... 246 psi)

Port size:
1/4" ... 1 1/4"

Gauge ports:
See table below

Ambient/Media temperature:
0 ... +80°C (+32 ... +176°F)
supply must be dry enough to avoid ice formation at temperatures below +2°C (+35 °F).

Materials:
Body & bonnet: zinc alloy
Bottom plug & adjusting knob (manual): acetal resin
Main valve: brass/synthetic rubber
Elastomers: synthetic rubber

Technical data, standard models, relieving, without gauge

Symbol	Port size	Gauge port size	Pressure range (bar)	Weight (kg)	Model
	G1/4	G1/4	0,3 ... 17	0,73	R24-201-RNXG
	G3/8	G3/8	0,3 ... 17	0,70	R24-301-RNXG
	G1/2	G1/2	0,3 ... 17	0,68	R24-401-RNXG
	G3/4	G1/2	0,3 ... 17	1,18	R24-601-RNXG
	G1	G1/2	0,3 ... 17	1,18	R24-801-RNXG
	G1 1/4	G1/2	0,3 ... 17	1,14	R24-A01-RNXG
	G1/4	G1/4	0,7 ... 8	0,86	R24-200-RNLG
	G3/8	G3/8	0,7 ... 8	0,83	R24-300-RNLG
	G1/2	G1/2	0,7 ... 8	0,81	R24-400-RNLG
	G3/4	G1/2	0,7 ... 8	1,24	R24-600-RNLG
	G1	G1/2	0,7 ... 8	1,24	R24-800-RNLG
	G1 1/4	G1/2	0,7 ... 8	1,20	R24-A00-RNLG

Option selector

Port size	Substitute
1/4"	2
3/8"	3
1/2"	4
3/4"	6
1"	8
1 1/4"	A
Type	Substitute
Manual actuated	0
Pilot actuated	1
Gauge	Substitute
With	G
Without (standard)	N

R24-★0★-R★★★


Thread	Substitute
PTF	A
ISO G parallel (standard)	G
Pressure range *	Substitute
None	X*
0,3 ... 2 bar	C
0,3 ... 4 bar	F
0,7 ... 8 bar (standard)	L
0,7 ... 17 bar	S

*Only available as pilot operated version


Flow characteristics

Manual-operated

Inlet pressure: 10 bar
Port size: 1/2 inch

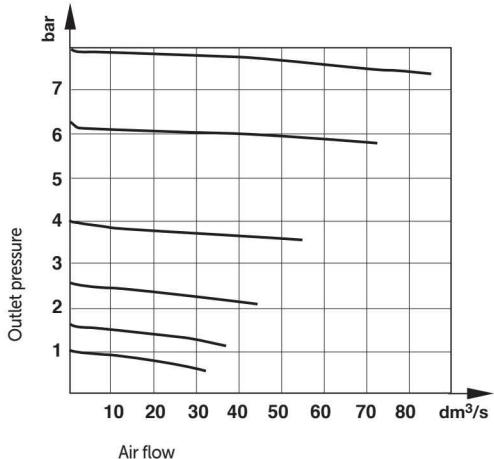


Inlet pressure: 10 bar
Port size: 1 inch

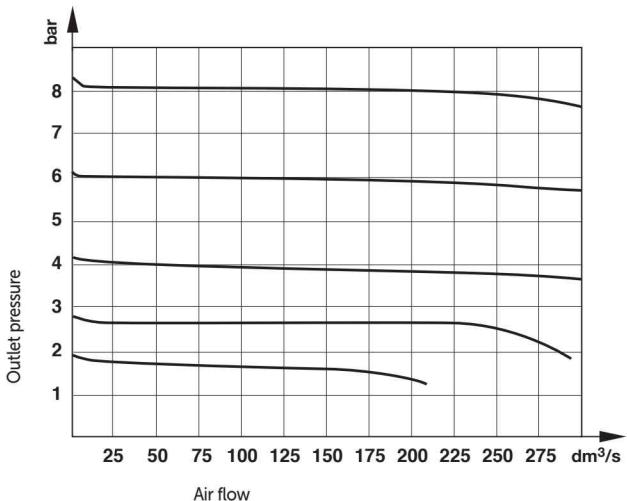


Pilot-operated

Inlet pressure: 10 bar
Port size: 1/2 inch

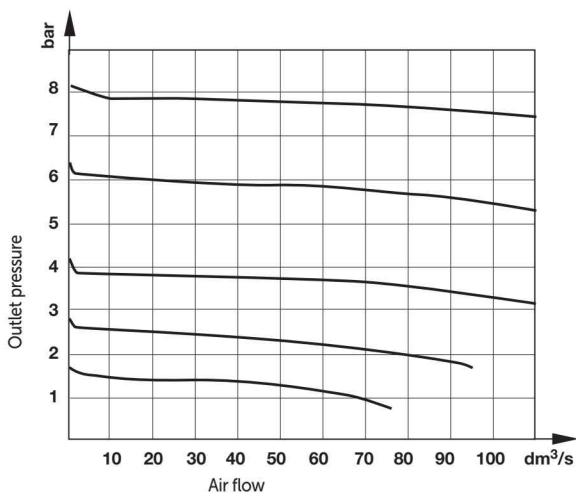

Inlet pressure: 10 bar
Port size: 1 inch

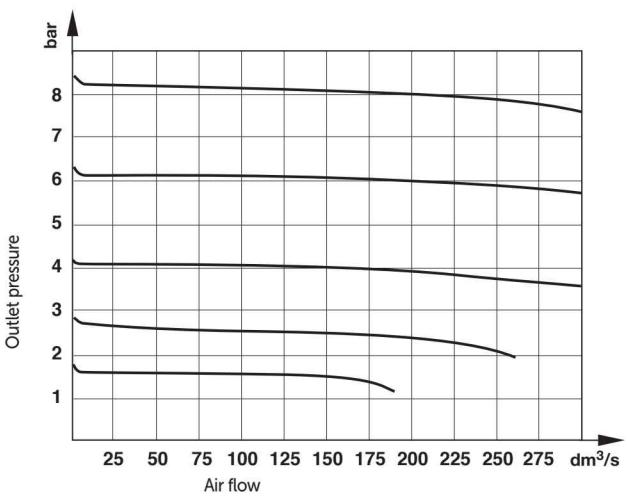

Accessories

Mounting bracket kit



18-999-412

Gauge



0 ... 6 bar: 18-015-012
0 ... 10 bar: 18-015-013
0 ... 25 bar: 18-015-014

Concentric reducing adaptors for gauge ports



R1/4-G1/8 150232818

Panel nut



2962-04

Service kits

Service kit for standard pressure range 0,7 ... 8 bar only



Manual actuated

G1/4 ... G1/2: 5292-52

G3/4 ... G1 1/4: 5292-53


Pilot actuated

G1/4 ... G1/2: 5292-54




G3/4 ... G1 1/4: 5292-55

Drawings





R24 (G1/4 ... G1/2) manually operated

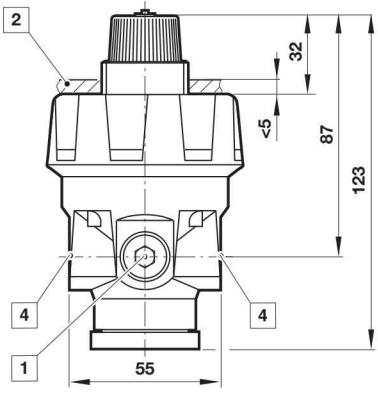

R24 (G3/4 ... G1 1/4) manually operated

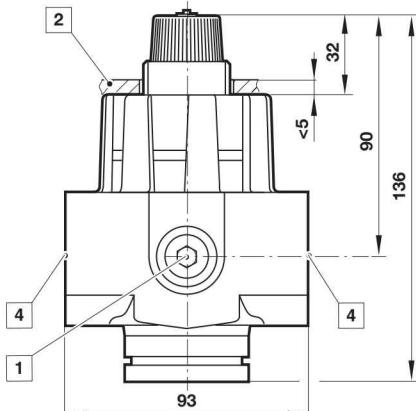



R24 (G1/4 ... G1/2) pilot operated

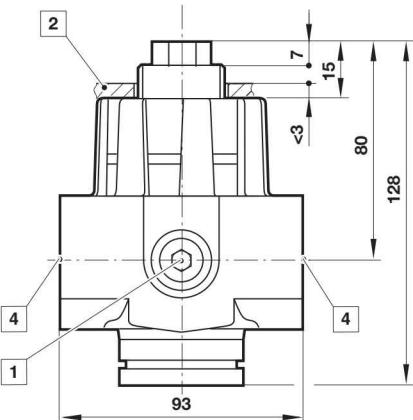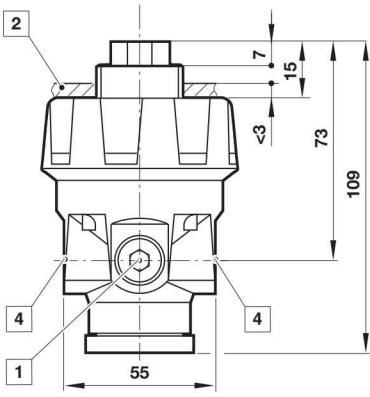



- 1** Gauge port
- 2** Panel hole ø 30 mm
- 3** Pilot port G1/4
- 4** Main ports 1/4", 3/8", 1/2", 3/4", 1" or 1 1/4"



Mounting bracket G1/4, G3/8, G1/2

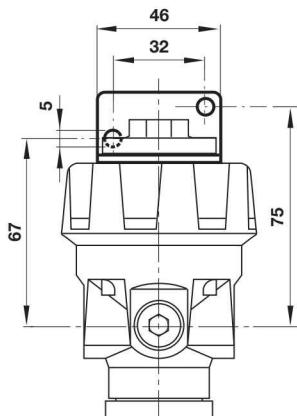

G3/4, G1, G1 1/4

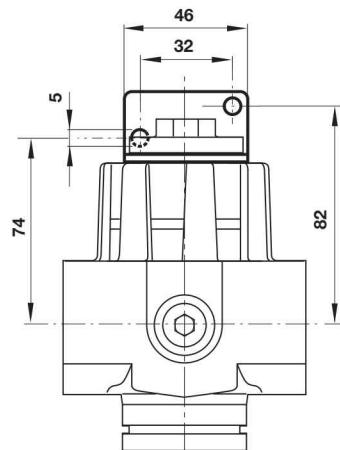

Dimensions in mm
Projection/First angle



Panel thickness: 0 ... 3 mm

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under

»Technical features/data«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult IMI Precision Engineering, Norgren Inc.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.