


CONFIGURATION

X	Control	-
X	Adjustment Range	-
N	Seal Material	Buna-N
(none)	Material/Coating	

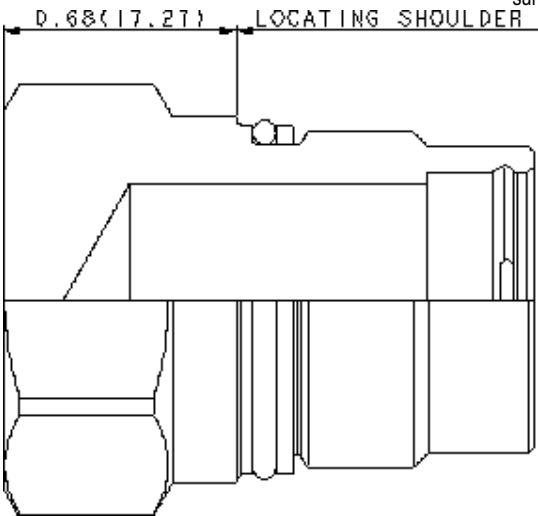

These cavity plugs can be used for both two-port and four-port cavities and allow all ports to remain connected.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-3A, T-5A & T-32A
Series	2
Maximum Operating Pressure	5000 psi
Port Configuration	2 Port / 4 Port
Valve Hex Size	1 1/8 in.
Valve Installation Torque	45 - 50 lbf ft
Seal kit - Cartridge	Buna: 990203007
Seal kit - Cartridge	Viton: 990203006
Model Weight	0.24 lb.

CONFIGURATION OPTIONS

Model Code Example: XCOAXXN

CONTROL	(X)	ADJUSTMENT RANGE	(X)	SEAL MATERIAL	(N)	MATERIAL/COATING
X -		X -		N Buna-N		Standard Material/Coating
				E EPDM		/AP Stainless Steel, Passivated
				V Viton		/LH Mild Steel, Zinc-Nickel

TECHNICAL FEATURES

- Corrosion resistant cavity plugs are intended for use in corrosive environments and are identified by the model code suffix /AP (see CONFIGURATION section). The bodies of these plugs are made from high strength lean duplex stainless steel. Internal parts are made from carbon steel leaded alloy, the same as standard plugs.

RELATED MODELS

- [XCOAE](#) All ports open cavity plug with SAE-6 external port